AMC Consultants Pty Ltd.
ABN 58 008 129 164

Level 12, 477 Collins Street
Melbourne 3000
Australia

T +61 3 8601 3300
E melbourne@amcconsultants.com

amcconsultants.com

Report

Tanga Graphite Mineral Resource Estimate

Grapeak Miners (TZ) Limited

AMC Project 0424046
Despatch Date: 19 December 2025
Effective Date: 1 November 2025

Executive summary

Grapeak Miners (Tanzania) Limited (Grapeak) commissioned AMC Consultants Pty Ltd (AMC) to complete Mineral Resource estimate (MRE) for the Tanga graphite project (the Project) in Tanzania. The MRE was completed by AMC in October-November 2025.

This report presents the results of the 2022 to 2025 exploration and MRE completed for the Tanga Graphite Project, located near Maramba village in Mkinga District, Tanga Region, Tanzania. The Project is situated within the Mozambique Belt, hosting high-grade metamorphic rocks favourable for flake graphite mineralisation. Exploration work undertaken by Grapeak has confirmed the presence of laterally continuous graphitic schist units containing consistent Total Graphitic Carbon (TGC) grades.

The MRE has been reported in accordance with the JORC Code[1] and it is therefore suitable for public release. The MRE is reported by classification in Table I and is reported above a cut-off grade of 3% TGC. The MRE effective date is 1 November 2025.

Table I Summary table – Tanga Graphite Project Mineral Resource (>3% TGC)

JORC Code Classification	Oxidation	Tonnage (Mt)	Total Graphitic Carbon (TGC %)
Indicated	Oxide	22	5.46
	Transition	58	5.00
	Fresh	69	4.72
	Total	**148**	**4.94**
Inferred	Oxide	5	4.89
	Transition	15	4.54
	Fresh	16	4.40
	Total	**35**	**4.52**
Total	Oxide	26	5.36
	Transition	72	4.90
	Fresh	85	4.66
	Total	**183**	**4.86**

Notes:

- Reported at a cut-off grade of 3% TGC for an open pit mining scenario.
- Resources reported within the prospecting and mining licences acquired by Grapeak.
- The model is currently not reported within a constraining nominal pit shell of any sort. This might change in future reporting.
- Cut-off date of 1 November 2025.
- Estimation for the model is by ordinary kriging.
- Classification is in accordance with the JORC Code Mineral Resource guidelines.
- Totals may vary due to rounded figures.

AMC completed all major modelling steps and stages, including guidance with metallurgy sample selection, database import and validation, interpretation and development of mineralisation model, statistical analyses, deposit lithological domaining, grade interpolation and model reporting. The complete analytical data file was used to perform classical statistical analysis.

[1] Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. The JORC Code, 2012 Edition. Prepared by: The Joint Ore Reserves Committee of The Australasian Institute of Mining and Metallurgy, Australian Institute of Geoscientists and Minerals Council of Australia (JORC).

The quality control and quality assurance (QAQC) analysis returned acceptable results, and the Competent Person formed the judgement that the data is suitable for preparing an MRE for public reporting.

Mineralisation is hosted within graphitic schists and is visually distinct due to the abundance of disseminated to banded flake graphite. A 3% TGC cut-off was selected for geological interpretation based on grade distribution analysis and clear separation between background lithologies and graphitic units. Weathering domains (oxide, transition and fresh) were modelled to support bulk density assignment and metallurgical assessment, although weathering was found to have no material impact on grade distribution.

Bulk density values were derived from direct measurements and assigned by weathering state, with mean values of 1.95 t/m^3 for oxide, 2.33 t/m^3 for transition and 2.72 t/m^3 for fresh rock zones. Statistical analysis of TGC data indicated low variability and no requirement for top-cutting. A 2-metre composite length was adopted for resource estimation, with compositing constrained to geological envelopes and weathering boundaries.

Variography and geostatistical analysis confirmed geological and grade continuity across the deposit. An ordinary kriging (OK) method was applied to estimate TGC grade. The Mineral Resource was classified in accordance with the JORC Code, with Indicated Mineral Resources defined in areas supported by closer drill spacing and continuity within variogram ranges, and Inferred Mineral Resources assigned to peripheral or sparsely drilled areas.

Metallurgical variability testing of eight core samples demonstrated that the Tanga graphite mineralisation is amenable to the production of high purity graphite concentrates >97% total carbon (TC) using relatively straightforward flotation processes (Table II). Variability in flake size is noted; two of the fresh composites (TDM001 and 002) have approximately 40% flake coarser than 150 µm, compared with the other fresh composites which have approximately 60% flake coarser than 150 µm. The purity of the <150 µm fractions >95% TC is deemed potentially suitable for spherical graphite manufacture. The Competent Person (CP) is of the opinion that petrographic and extractive metallurgical data support the classification of the Tanga deposit as an Industrial Mineral Resource in terms of the JORC Code Clause 49.

Table II Summary flake size and TC grade: coarse fraction (>150 µm) vs fine fraction (<150 µm)

	Fresh					**Oxide / kaolinised**		
Sample ID	TDMOOI	TDM002	TDM003	TDMOM	TDM005	TW006	TDM007	TDM008
Test ID	FT02	FT03	FT05	FT06	FT07	FTOI	FT08	FT04
Size Fraction	Mass	Mass	Mass	Mass	Mass	Mass	Mass	Mass
	Recovery	Recovery	Recovery	Recovery	Recovery	Recovery	Recovery	Recovery
>150 (%)	34.6	42.2	60.5	60.5	65.2	67.2	57.1	72.7
<150 (%)	65.4	57.8	39.5	39.5	34.8	32.8	42.9	27.3
Total Con (%)	100	100	100	100	100	100	100	100
TC Grade (%)	98.58	98.64	97.18	97.85	97.22	98.45	97.43	97.37

The Mineral Resource has been classified as Indicated and Inferred Mineral Resource based on the JORC Code. The classification level is based upon an assessment of geological understanding of the deposit, geological and grade continuity, drillhole spacing, QAQC results, search and interpolation parameters, and analysis of available density information. The deposit appears to be of sufficient grade, quantity, and coherence to have reasonable prospects for eventual economic extraction.

AMC recommends the following actions are completed to support the Mineral Resource definition and evaluation efforts at the Tanga deposit:

- Complete additional geological, structural and geochemical studies to support an improved 3D geological and mineralisation model.
- Review the weathering state logging, in addition to verifying lithologies such as quartz-feldspar rocks and marble where there may be queries.
- Review if additional petrography is required to verify flake size and gangue mineralogy and improve lithological classification.
- Current QAQC procedures should be maintained to ensure high-quality data is available for subsequent Mineral Resource estimates.
- Routine measurements of bulk density in core to support subsequent Mineral Resource and estimates using standard Archimedes (water immersion) technique or/and the calliper method.
- Additional diamond drilling to obtain geological knowledge in areas where the currently interpreted mineralisation zones are extrapolated.
- Additional metallurgical variability testing of core samples to improve confidence in potential product quality and generate sufficient concentrates for production and performance trials of, for example, spherical graphite.
- Marketing agreements should be sought with prospective customers.

The extract from the JORC Code Table 1 is provided in Appendix A for compliance with the Code requirements for the reporting of Mineral Resources.

Quality control

The signing of this statement confirms this report has been prepared and checked in accordance with the AMC Peer Review Process.

Project Manager


The signatory has given permission to use their signature in this AMC document

Serik Urbisinov — 19 December 2025 (Date)

Peer Reviewer


The signatory has given permission to use their signature in this AMC document

Dmitry Pertel — 19 December 2025 (Date)

Author


The signatory has given permission to use their signature in this AMC document

Serik Urbisinov and Andrew Scogings — 19 December 2025 (Date)

Important information about this report

Confidentiality

This document and its contents are confidential and may not be disclosed, copied, quoted or published unless AMC Consultants Pty Ltd. (AMC) has given its prior written consent.

No liability

AMC accepts no liability for any loss or damage arising as a result of any person other than the named client acting in reliance on any information, opinion or advice contained in this document.

Reliance

This document may not be relied upon by any person other than the client, its officers and employees.

Information

AMC accepts no liability and gives no warranty as to the accuracy or completeness of information provided to it by or on behalf of the client or its representatives and takes no account of matters that existed when the document was transmitted to the client but which were not known to AMC until subsequently.

Precedence

This document supersedes any prior documents (whether interim or otherwise) dealing with any matter that is the subject of this document.

Recommendations

AMC accepts no liability for any matters arising if any recommendations contained in this document are not carried out, or are partially carried out, without further advice being obtained from AMC.

Outstanding fees

No person (including the client) is entitled to use or rely on this document and its contents at any time if any fees (or reimbursement of expenses) due to AMC by its client are outstanding. In those circumstances, AMC may require the return of all copies of this document.

Public reporting requirements

If a Client wishes to publish a Mineral Resource or Ore / Mineral Reserve estimate prepared by AMC, it must first obtain the Competent / Qualified Person's written consent, not only to the estimate being published but also to the form and context of the published statement. The published statement must include a statement that the Competent / Qualified Person's written consent has been obtained.

Contents

1 Introduction 1
1.1 Scope of Work 1
1.2 Project location 1
1.3 Access and infrastructure 3
1.4 Tenement details 3
1.5 Independence 4
1.6 Competent persons and obligations of Grapeak for public reports 4
1.7 Principal sources of information 5
1.8 Abbreviations 5
2 Geology 7
2.1 Regional geology 7
2.1.1 Project geology 9
3 Data review 10
3.1 Exploration programme 10
3.2 Drilling methods 10
3.2.1 Drill sample recovery 12
3.2.2 Drillhole collars 14
3.2.3 Drillhole orientation and density 15
3.3 Surveying 16
3.3.1 Downhole surveying 16
3.3.2 Surface topography 16
3.4 Logging, sampling, assaying and data management procedures 17
3.4.1 Sampling 19
3.4.2 Assaying 22
3.4.3 In situ bulk density 22
3.4.4 Analytical quality control (QAQC) procedures and data 26
3.4.5 Quality control results 27
3.4.5.1 Blank material 27
3.4.5.2 CRM GGC-08 27
3.4.5.3 CRM GGC-09 28
3.4.5.4 CRM GGC-11 29
3.4.5.5 CRM GGC-13 30
3.4.5.6 CRM GGC-14 31
3.4.5.7 Coarse duplicates 32
3.4.5.8 Pulp duplicates 33
3.4.6 Data management 33
3.4.7 Data verification 34
3.4.8 Summary 34
4 Tanga Mineral Resource estimate 35
4.1 Introduction 35
4.2 Geological modelling 35
4.2.1 Data import and validation 35
4.2.2 Preliminary Statistical Analysis 36
4.2.2.1 Threshold Grade Determination 36
4.2.3 Mineralisation 37
4.3 Weathering 40
4.4 Drillhole data coding and length compositing 40
4.5 Statistical analysis 41

4.5.1 Summary statistics – raw data 42
4.5.2 Summary statistics – composite data 42
4.5.3 High-grade cutting 42
4.6 Bulk densities 43
4.7 Variography 45
4.8 Volume modelling/block model development 46
4.8.1 Model construction and parameters 46
4.9 Grade estimation 47
4.10 Model validation 49
4.11 JORC Code Clause 49 criteria and Mineral Resource classification 52
4.11.1 Introduction 52
4.11.2 Tanga lithologies and mineralogy 53
4.11.3 Weathering 55
4.11.4 Geological logging 55
4.11.5 Metallurgy 60
4.11.6 Conclusions 61
4.11.6.1 Offtake agreement 71
4.11.7 Classification 71
5 Reporting 73
6 Conclusions 74
7 Recommendations 75
8 References 76

Tables

Table 1.1 Abbreviations 5
Table 2.1 Regional Stratigraphy of Tanga area after Geological Survey of Tanzania 9
Table 3.1 Summary of methods relative to number of holes and individual samples 23
Table 3.2 Control samples used during 2024 to 2025 drilling campaign 27
Table 3.3 Blank assay results 27
Table 3.4 GGC-08 CRM grades 27
Table 3.5 GGC-09 CRM grades 28
Table 3.6 GGC-11 CRM grades 29
Table 3.7 GGC-13 CRM grades 30
Table 3.8 GGC-14 CRM grades 31
Table 3.9 Summary QAQC 34
Table 4.1 Data provided for the MRE 35
Table 4.2 Summary of supplied and validated data used for the MRE update 36
Table 4.3 Statistics for the wireframe models (not clipped by topography surface) of the Tanga deposit 39
Table 4.4 Classical statistics for TGC (weighted on sample length) 42
Table 4.5 Classical statistics for TGC within mineralisation (weighted on sample length) 42
Table 4.6 Semivariograms parameters 46
Table 4.7 Block model dimensions and parameters. 47
Table 4.8 Block model attributes and field names 47
Table 4.9 Interpolation parameters 48

Table 4.10 Comparison of TGC grades between block model and composites 50
Table 4.11 Comparison of wireframe volume and block model volume 50
Table 4.12 Examples of graphite flake size and some typical market terminology 52
Table 4.13 Hole and thin section IDs and depths 57
Table 4.14 Metallurgy samples: drillhole ID, depths, approximate grades, mass and weathering domains 63
Table 4.15 Individual composite carbon speciation compared with drill assays 69
Table 4.16 Individual composite sulfur speciation and LOI 69
Table 4.17 Individual composite major element XRF results 70
Table 4.18 Fresh composites concentrate size by assay results 70
Table 4.19 Oxide composites concentrates (TDM006, 007) and kaolinised concentrate (TDM 008) size by assay results 71
Table 4.20 Summary flake size and TC grade: coarse fraction (>150 µm) vs fine fraction (<150 µm) 71
Table 5.1 Tanga Graphite Project Mineral Resource (>3% TGC) 73

Figures

Figure 1.1 Project location 2
Figure 1.2 Tenement map of Tanga graphite project 4
Figure 2.1 Regional geological map of Tanzania after Geological survey of Tanzania, 2015; location of Tanga Graphite project within Mozambique belt is marked in red. 8
Figure 3.1 Zinex A5 rig drilling a vertical hole 11
Figure 3.2 Man-portable rig drilling a vertical hole inside forest 12
Figure 3.3 Measuring drilling run 13
Figure 3.4 RTK drillhole survey operation in the field 15
Figure 3.5 Drillhole collar distribution and drill grid density across the project area 16
Figure 3.6 Sample of topographic map produced 17
Figure 3.7 Photo documentation 18
Figure 3.8 Core box setup for photo documentation 19
Figure 3.9 Logged drill core with cut line and sampling intervals marked 20
Figure 3.10 Diamond saw and cut core 21
Figure 3.11 SGS laboratory in Mwanza 22
Figure 3.12 Wax coated core (L) and being immersed in water to measure displaced volume (R) . 24
Figure 3.13 Density scale method (weight in air and water) (L) and calliper method (R) 24
Figure 3.14 Whole core tray method. Measure diameter of core (L) and weigh whole core tray (R) 25
Figure 3.15 Relationships between different bulk density measurement methods 25
Figure 3.16 Example cross section comparing density (t/m^3) by four different methods, relative to weathering domains 26
Figure 3.17 Shewhart control chart – GGC-08 28
Figure 3.18 Shewhart control chart – GGC-09 29
Figure 3.19 Shewhart control chart – GGC-11 30
Figure 3.20 Shewhart control chart – GGC-13 31
Figure 3.21 Shewhart control chart – GGC-14 32

Figure 3.22 Simple linear regression of TGC(%) for coarse duplicates 32
Figure 3.23 Simple linear regression of TGC (%) for pulp duplicates 33
Figure 4.1 Histogram of unrestricted TGC grade distribution 37
Figure 4.2 Example of interpretation of mineralisation (looking north) 38
Figure 4.3 Example of interpretation of mineralisation compared against geological section (looking north) 39
Figure 4.4 Constructed wireframe models (3D view) 40
Figure 4.5 Histogram of sample length distribution 41
Figure 4.6 Histogram for TGC values within mineralisation 42
Figure 4.7 Histogram for TGC values within mineralisation - top-cut 43
Figure 4.8 Histogram for bulk density values within oxide domain 44
Figure 4.9 Histogram for bulk density values within transition domain 44
Figure 4.10 Histogram for bulk density values within fresh domain 45
Figure 4.11 Tanga downhole and directional variogram models for TGC grades of the mineralised zones 46
Figure 4.12 Strings for dip 49
Figure 4.13 Visual validation of block model grades vs drillhole grades 50
Figure 4.14 Swath plot by easting 51
Figure 4.15 Swath plot by northing (Central zone) 51
Figure 4.16 Swath plot by 25 m bench (Central zone) 52
Figure 4.17 TGDD 1029 showing brown oxidation underlain by white kaolinised graphite mineralisation from about 20m down-hole depth 54
Figure 4.18 Quartz feldspar and ferruginous clay with split graphite. No sulfides observed. Hole TGDD1016, thin section TGF214 54
Figure 4.19 Brown oxidised graphite schist, thin section TGF214 55
Figure 4.20 TGDD1033 QFR pegmatite? 56
Figure 4.21 TGDD1032 QFR metasediment? 56
Figure 4.22 Petrography samples location (L) and white kaolinisation provisional distribution interpreted from geology logs and core photo review (R) 57
Figure 4.23 TGDD1016 TGF212 ~12 m quartz feldspar haematitic clay matrix graphite sillimanite ‘few specks pyrite’. TGDD1048 TGF342 ~3 m quartz feldspar clay graphite, no sulfides. Similar to Oxide metallurgy composite TDM007 58
Figure 4.24 TGDD1029 TGF181 ~37 m kaolinised graphite schist (L) TGF184 kaolinised graphite schist ~75m. Similar to Kaolinised metallurgy composite TDM008 59
Figure 4.25 TGDD1019 TGF237 ~101 m quartz bioitite schist with sulfides and small graphite flakes (L). TGF234 ~78 m. Similar to Fresh metallurgy composite TDM001 59
Figure 4.26 TGDD1026 TGF250 ~22 m quartz mica feldspar graphite pyrite, mostly small flakes. Similar to Fresh metallurgy composite TDM002 (L). Quartz calcite feldspar mica graphite pyrite TGF362 1037 ~58 m. Similar to Fresh metallurgy composite TDM003 (R) 59
Figure 4.27 Quartz mica feldspar graphite pyrite TGF391 1039 ~50 m. Similar to Fresh metallurgy composite TDM004 (L). Feldspar quartz biotite pyroxene graphite pyrite TGF346 1048 ~59 m. Similar to Fresh metallurgy composite TDM005 (R). 60
Figure 4.28 TGDD1019 TGF234 ~78 m Fresh, unoxidised quartz biotite feldspar graphite pyrite (L). Fresh quartz mica feldspar graphite pyrite TGF397 1039 ~93 m (R) 60
Figure 4.29 Metallurgy sample drill collar location map 62

Figure 4.30 Fresh metallurgy samples TDM001 and 002: holes TGDD1019 and 1026 63
Figure 4.31 Fresh metallurgy samples TMD003, 004 and 005: holes TGDD1037, 1039 and 1048... 64
Figure 4.32 Oxide metallurgy samples TDM006 and 007: holes TGDD1013 and 1016 64
Figure 4.33 Kaolinised metallurgy sample TDM008: hole TGDD1029 65
Figure 4.34 Met sample TDM001 (fresh) TGDD1019 (73.5-79.5 m) 65
Figure 4.35 Met sample TDM002 (fresh) TGDD1026 (26.5-33.05 m) 66
Figure 4.36 Met sample TDM003 (fresh TGDD1037 (51.8-57.8 m) 66
Figure 4.37 Met sample TDM004 (fresh) TGDD1039 (46.3-52.9 m) 67
Figure 4.38 Met sample TDM005 (fresh) TGDD1048 (57.8-66.8 m) 67
Figure 4.39 Met sample TDM006 (oxidised) TGDD1013 (2.2-12.17 m) 68
Figure 4.40 Met sample TDM007 (oxidised) TGDD1016 (10.24-15.1 + 15.4-22.24 m) 68
Figure 4.41 Met sample TDM008 (kaolinised) TGDD1029 (68.3-75.8 + 77.8-81.8 m) 69
Figure 4.42 Mineral Resource classification in 3D view (Green – Indicated; Blue – Inferred)..... 72

Appendices

Appendix A JORC Code Table 1
Appendix B Prospecting licences

Distribution list

1 e-copy to Grapeak Miners (TZ) Limited
1 e-copy to AMC office

OFFICE USE ONLY	
Version control (date and time)	
19 December 2025	1730

1 Introduction

1.1 Scope of Work

Grapeak Miners (Tanzania) Limited (Grapeak) commissioned AMC Consultants Pty Ltd (AMC) to complete Mineral Resource estimate (MRE) for the Tanga graphite project (the Project) in Tanzania. The MRE was completed by AMC in October-November 2025.

The scope of work under the Specification Assignment included the following:

- Acquisition and desktop review of all available data and reports for the deposit.
- Communication and interaction with Grapeak to review new information and data, as well as Mineral Resource estimation strategies and methods.
- The site visit and laboratory inspection were aimed at identifying material flaws and verifying data, as well as meeting with key field personnel and obtaining additional information and documentation.

The main objective of the work completed by AMC was to estimate graphite resources of the Tanga deposit based on the analytical and geological data obtained from recent drilling by Grapeak.

The following objectives were accomplished:

- Guidance on selection of drill samples for metallurgical variability tests.
- Import and validation of the databases.
- Classical statistical analysis of sampling data and selection of cut-off grades for interpretation of mineralisation domains.
- Interpretation of the mineralisation, primarily based on cut-off grades and lithology.
- Wireframe modelling of the mineralized bodies and geological features.
- Development of the weathering profile by analysing logging results.
- Coding of sampling data using wireframes.
- Classical statistical analysis, involving selection and application of top-cut grade values for each domain.
- Creation of composited intervals by length.
- Geostatistical analysis including modelling of variograms.
- Creation of block models, their coding and preparation.
- Grade interpolation using ordinary kriging (OK) with indicator values.
- Mineral Resource classification.
- Mineral Resource block model file, associated wireframes and key project data files.
- Mineral Resource report prepared in accordance with the JORC Code[2].

1.2 Project location

The Tanga Graphite Project is in north-eastern Tanzania within the Tanga Region (Mkinga District), near Maramba village. The project lies approximately 350 km north-west of Dar es Salaam and about 72 km

[2] Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. The JORC Code, 2012 Edition. Prepared by: The Joint Ore Reserves Committee of The Australasian Institute of Mining and Metallurgy, Australian Institute of Geoscientists and Minerals Council of Australia (JORC).

inland from the coastal port city of Tanga (Figure 1.1). Road access is via Tanga and the regional road network serving Mkinga District.

The approximate centre of the project area is located at:

- 4°48'32.45" S, 38°46'59.88" E.

Figure 1.1 Project location



Source: Google Earth

Regional setting

Tanga Region occupies the north-eastern coastal part of Tanzania bordering the Indian Ocean to the east and Kenya to the north. Mkinga District is one of the administrative councils within Tanga Region and extends from the coastline inland towards the Usambara foothills.

The project is situated in the inland part of Mkinga District near Maramba village, in an area of gently to moderately undulating terrain. Nearby rural settlements and agricultural land are serviced by a network of regional and district roads maintained by TANROADS and the Mkinga District Council.

Local Setting

The licence area is located immediately to the west of Maramba village and associated smallholder agricultural land. The surrounding area comprises a mixture of cultivated fields, secondary bushland and small patches of woodland. Elevations in the project area are moderate and suitable for surface mining and associated infrastructure development.

No major towns occur within the licence footprint; the nearest service centres are Maramba village and Mkinga District headquarters at Parungu Kasera, approximately 40 km north-east of Tanga along the Kwasongoro–Maramba road.

1.3 Access and infrastructure

Primary access to the project is via the regional road network from Tanga is as follows:

- From Tanga city, road access to Mkinga District is via the paved Tanga–Horohoro (T13) trunk road, which runs north-east towards the Kenyan border and passes through the district.
- A turn-off near Kwasongoro provides access to the Kwasongoro–Maramba road, which is a regional/district road connecting Tanga with Maramba and Parungu Kasera (Mkinga District headquarters).
- From Maramba village, a short network of local gravel roads and bush tracks provides access to the project area. Track conditions are typically suitable for light vehicles during the dry season; however, 4×4 vehicles are recommended during and immediately after the wet season.


The project is favourably located with respect to regional infrastructure:

- Port: Approximately 72 km by road from the Port of Tanga, which provides access to export shipping routes along the East African coast and to international markets.
- Regional centre: Tanga city serves as the nearest major regional service centre, providing government services, accommodation, fuel, supplies, and mechanical support.
- Road network: The project benefits from proximity to the paved trunk road T13 and associated regional/district roads that link Tanga to the Kenyan border and inland settlements.
- Air transport: Tanga Airport provides scheduled domestic connections to Dar es Salaam and other centres, facilitating personnel movement and light freight transport.

1.4 Tenement details

The concession area is located near the villages of Daluni, Kigongoi, Gombelo, Hemsambia, Vuga, Mpanga and Maramba. All three prospecting licences (PLs) are contiguous and are owned by the same group of companies, Grapeak Miners (TZ) Ltd and Sakariya Gold (TZ) Ltd. Additionally, there are several primary mining licences (PMLs), both acquired and to be acquired, situated within the PL boundaries. Only Mineral Resources within PLs and acquired PMLs were reported. A location map showing the PLs and PMLs is provided below. Further details regarding the PLs are included in Appendix B of this report.

Figure 1.2 Tenement map of Tanga graphite project

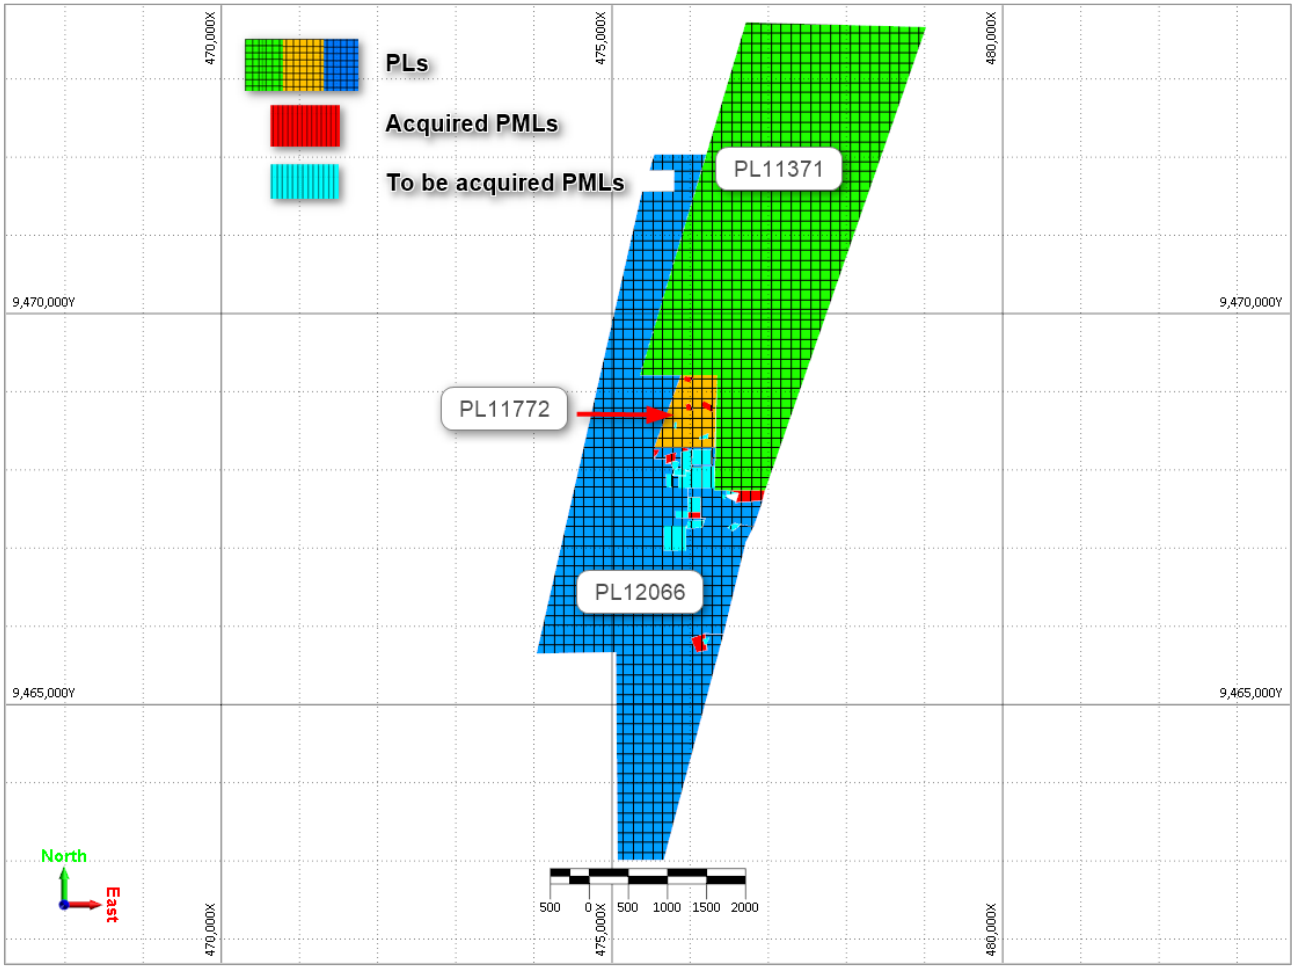

1.5 Independence

Neither AMC, nor the author of this report has or has had previously any material interest in Grapeak or the mineral properties in which Grapeak has an interest. AMC's relationship with Grapeak is solely one of professional association between client and independent consultant.

AMC is an independent geological and mining consultancy. This report is prepared in return for professional fees based upon agreed commercial rates and the payment of these fees is not contingent on the results of this report.

No member or employee of AMC is, or is intended to be, a director, officer, or other direct employee of Grapeak.

1.6 Competent persons and obligations of Grapeak for public reports

Grapeak Technical Director, Supriya Das, is responsible for all drillhole, QAQC data and geology aspects related to the project. AMC Principal Geologist, Dr Andrew Scogings, is responsible for aspects that relate to graphite as an industrial mineral. Independent Metallurgical Operations, Technical Manager, Mr Peter Adamini, is responsible for aspects that relate to metallurgy.

For any Public Report (JORC Code clause 6 and clause 9) undertaken in accordance with the JORC Code regarding the Mineral Resource estimate, AMC Principal Geologist, Mr Serikjan Urbisinov, will act as the Competent Person.

For first time Public Reports regarding the Mineral Resource estimate, the report can only be issued with the prior written consent of the Competent Person as to the form and context in which it appears. The appropriate compliance statement will be given at that point for inclusion in the Public Report.

Other than for annual reports of the company's Mineral Resources and Ore Reserves, where Grapeak is re-issuing information previously issued with the written consent of the Competent Person, it must state the original report name, the name(s) of the Competent Person responsible for the original report and state the date and reference the location of the original source public report for public access. In these circumstances, Grapeak is not required to obtain the Competent Person's prior written consent as to the form and context in which the information appears, but must confirm through the appropriate compliance statements that:

- There is no new information or data that materially affects the information relevant to the original Public Report.
- All material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed.
- The company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified. Note that for the subsequent public presentation, it is the responsibility of Grapeak acting through its Board of Directors to ensure the form and context has not been materially changed.

1.7 Principal sources of information

In compiling this MRE, AMC has relied heavily on information documented in reports provided by Grapeak. AMC has supplemented this information where necessary with other available information.

AMC has made all reasonable endeavours to confirm the authenticity and completeness of the technical data on which this report is based; however, AMC cannot guarantee the authenticity or completeness of such third-party information.

The report author is not qualified to comment on any legal, environmental, political, or other issues relating to the status of the tenements, or for any marketing and mining considerations related to the economic viability of the Tanga graphite project.

1.8 Abbreviations

All currency values are United States dollars ($ or US$), unless otherwise specified. All quantities are expressed in metric units. Abbreviations are summarized in Table 1.1.

Table 1.1 Abbreviations

Abbreviation	Description	Abbreviation	Description
%	percent	LDL	Lower detection limit
°	degrees	LiDAR	Light detection and ranging
°C	degrees Celsius	LOI	Loss on ignition
µm	Micron (1 millimetre = 1000 microns (µm))	m	metres
3D	three-dimensional	MAIG	Member of the Australian Institute of Geoscientists
AAS	Atomic Absorption Spectrometry	MB	Mozambique Belt
AMC	AMC Consultants Pty Ltd	MRE	Mineral Resource estimate
BD	Bulk density	Mt	Mega-tonnes (or million tonnes)
COV	Coefficient of variation	NNE	North-north-east


Abbreviation	Description	Abbreviation	Description
cm	Centimetre	NQ	47.6 mm core diameter
CP	Competent Person	OK	Ordinary kriging
CRM	Certified Reference Material	PL	Prospecting licence
DDH	Diamond drillhole	PML	Primary mining licence
DGPS	Differential global positioning system	PSD	Particle size distribution
DSM	Digital surface model	RPM	Rotations per minute
DTM	Digital terrain model	RTK	Real-Time Kinematic
DXF	Drawing Exchange Format	RQD	Rock quality designation
EAO	East African Orogen	SEM	Scanning electron microscope
FTIR	Fourier-transform infrared spectroscopy	SG	Specific gravity
GCP	Ground control points	SOP	Standard operating procedure
GNSS	Global Navigation Satellite System	SSW	South-south-west
GPS	Global Positioning System	T13	Tanga–Horohoro trunk road
Grapeak	Grapeak Miners (Tanzania) Limited	TAREF11	Tanzania Reference Frame 2011
HQ	63.5 mm core diameter	TC	Total Carbon
ICP	Inductively Coupled Plasma	TGC	Total graphitic carbon
ICP-AES	Inductively Coupled Plasma Atomic Emission Spectroscopy	TS	Total sulfur
ICP-MS	Inductively Coupled Plasma Mass Spectrometry	QAQC	Quality assurance and quality control
IMO	Independent Metallurgical Operations Pty Ltd	QFR	Quartz feldspar rock
IR	Infrared	UAV	Unmanned aerial vehicle
kg	Kilogram(s)	UTM	Universal Transverse Mercator
km	Kilometre(s)	WGS	World Geodetic System
km/h	Kilometres per hour	XRD	X-Ray diffraction
km^2	Square kilometres	XRF	X-ray Fluorescence
kt	Kilo-tonnes (or thousand tonnes)		

2 Geology

2.1 Regional geology

The present concession areas (PL11371/2019, PL11772/2021 & PL12066/2022) come under Neoproterozoic (Pan-African) Mozambique belt (MB; Holmes, 1951), which extends from Mozambique to Ethiopia through Malawi, Madagascar, Tanzania, Kenya and NE Uganda (Figure 2.1). The MB has been the subject of geological studies due to its complex tectonic history and mineral potential, including graphite deposits. It has been regarded as an assemblage of Proterozoic belts of different ages (Shackleton, 1986) and is characterised by high-grade rocks in its southern part (Mozambique, Malawi, Madagascar, Tanzania, Kenya) and lower grade rocks in the northern part (Ethiopia). The high-grade, deep crustal terranes of the MB in East Africa and the lower grade, middle to upper crustal Pan-African terranes of northeast Africa and Arabia (Arabian-Nubian shield) together make up the East African Orogen (EAO; Stern, 1994). The MB is a structurally and metamorphically complex terrane that abuts the edge of the Tanzania Craton and formed during the Neoproterozoic. The formation of the belt is related to the widespread Pan-African orogeny and most of the rocks are highly metamorphosed pyroxene-gneiss, charnockite, and biotite - hornblende gneiss. It also contains occurrences of graphitic schist, quartzites and crystalline limestone. Graphite is often found in rocks that have undergone high-grade metamorphism which are common products of the intense orogenic deformations. Exploration efforts often focus on identifying specific geological settings within the mobile belt where graphite concentrations are highest. The Pan-African orogeny and the subsequent geological history of the MB have played a crucial role in creating the conditions conducive to the development of graphite deposits in this region.

Figure 2.1 Regional geological map of Tanzania after Geological survey of Tanzania, 2015; location of Tanga Graphite project within Mozambique belt is marked in red.

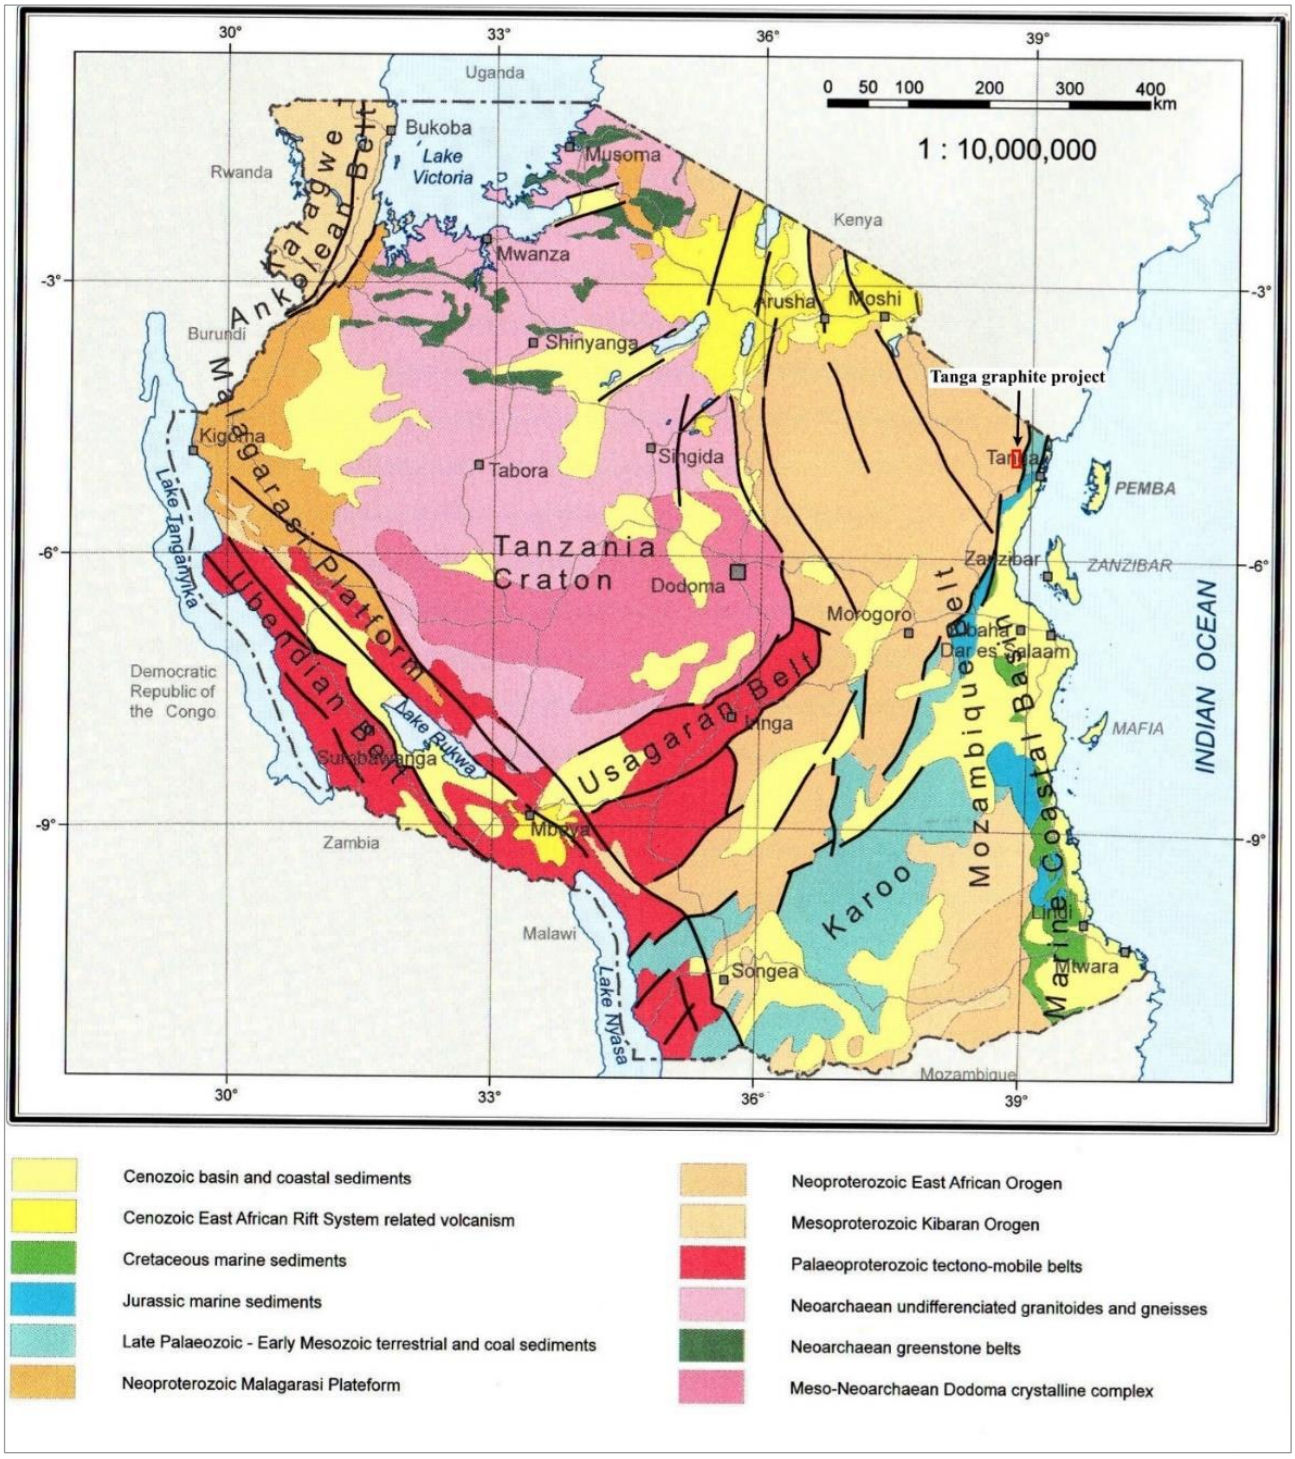

Source: Provided by Grapeak.

Regionally, all the prospecting licences (PL11371/2019, PL11772/2021 & PL12066/2022) are within the N-S trending Usagaran Proterozoic system of MB (Table 1.1). This system is principally defined by high grade (amphibolite to granulite grade) metamorphic rocks of both sedimentary and igneous origin, ranging from schists to gneisses including marble, amphibolites, graphitic schist, mica and kyanite schist, hornblende, biotite, garnet gneisses, quartzite and granulite that are overlain by Karoo

sediments. Rocks in the Usagaran system are well known for hosting gold, nickel, copper, and different gemstones such as tourmaline, red garnet, tanzanite, and the highest-grade coarse graphite flakes.

Table 2.1 Regional Stratigraphy of Tanga area after Geological Survey of Tanzania

Crystalline Limestone/Dolomite with graphite		
Calc-silicate gneiss		
Kyanite/Sillimanite/Fuchsite Gneiss with Garnet/Graphite		
Quartz-feldspathic gneiss/schist with pyrite		
Acid gneiss with garnet, pyroxene, hornblende and biotite		**USAGARAN** (PRECAMBRIAN)
Graphite schist/gneiss		
Amphibolite		
Serpentinite		
Meta-pyroxenite		
Migmatite		

2.1.1 Project geology

The concessions are located in a rugged hilly terrain, with hillock ridges oriented along NNE-SSW and a relatively gentler plain area occupying the foothill and valley regions. The maximum elevation is ~940 m at the west-central part of the concession cluster and the minimum elevation is ~300 m observed on the northern fringes. A significant part of the concession area is covered with thick vegetation, while the remaining portions are covered with scrubs, orchards, and agricultural land. Limited bedrock outcrops are exposed within ridges and hill slopes. The area is drained by north and south-easterly flowing perennial streams, which are fed by runoff from the hills in the western and southern parts, as well as from groundwater.

The concessions fall within the northeastern extension of the Mozambique Belt in Tanzania. The area is mostly soil-covered and is dominated by khondalite and quartzite, followed by graphitic schist, mafic granulite, quartz-feldspathic schist, and crystalline limestone. NNE-SSW trending hilltops mostly show in situ khondalite, quartzite, and mafic granulite. The foothill and valley regions are mostly soil-covered with a few boulders. In situ quartzite is exposed on both the western and eastern parts of the area, while khondalite occurs in the central part. Quartz-feldspathic schist occurs both in the central part and some in the western part. Graphitic schist, as boulders or jutting out in situ exposures, occurs mainly on the western slope of the central ridge and in some parts as isolated occurrences parallel to the trend. Voluminous mafic granulite with intermingled migmatised zones are present throughout the concession areas. A small unit of crystalline limestone is exposed in the western part. The maximum number of foliations within lithological units trends between N345° and N40°, with an average dip value of approximately 30° towards the east. Inferred graphite mineralisation has been observed along the contact of khondalite and in the vicinity of quartzite and mafic granulites. The presence of high-temperature mineral assemblages of garnet, sillimanite, cordierite, and ± kyanite within lithological units denotes high-grade metamorphism. Graphite occurs as flakes in disseminated form within the host rock.

3 Data review

3.1 Exploration programme

Grapeak undertook an extensive exploration programme on the Tanga Graphite Project between 2022 and 2025. The work included geological mapping, pitting, surface sampling, petrographic and mineralogical studies, and a comprehensive diamond drilling campaign. The objective of the programme was to identify graphite-bearing units, assess mineralisation thickness and continuity, and generate a reliable dataset for Mineral Resource estimation.

A combination of grab samples, pit samples, channel samples, and diamond core samples was used to characterise the mineralisation. Surface sampling supported geological mapping and helped identify priority zones for drilling. During the reconnaissance phase, 155 grab samples were analyzed for total graphitic carbon (TGC) and total sulfur (TS), while an additional 170 grab samples collected during detailed mapping were analysed for TGC only. A further 60 samples from pits and eight channel samples were also analyzed for TGC. Core drilling provided the primary analytical dataset, with 3,728 core samples analysed for TGC and 370 samples analysed for sulfur.

Petrographic and mineralogical studies were conducted throughout the exploration campaign to better understand the nature and quality of the graphite. In total, 90 samples, comprising both grab and core samples, were examined under petrographic investigation. This included 15 grab samples assessed during reconnaissance work, 14 grab samples from detailed mapping, and 59 core samples studied for qualitative and semi-quantitative characterisation of flake graphite. A suite of 41 samples underwent detailed analytical work, including stereo microscopy, X-ray diffraction (XRD), Fourier-transform infrared spectroscopy (FTIR), Raman spectroscopy and representative SEM imaging, providing essential information on flake size, purity, and host-rock mineral assemblages. Eight metallurgical samples were also examined to better understand flake liberation characteristics, concentrate quality, and overall graphite behaviour during processing.

Diamond drilling formed the core of the exploration program. A total of 100 drillholes were drilled between April 2024 and February 2025, with 91 holes completed during 2024 and the remaining nine drilled in early 2025. Of these holes, 81 were drilled entirely in HQ diameter, while the remaining 19 were drilled using a combination of HQ and NQ core sizes. Both standard and triple-tube drilling methods were employed, with triple-tube techniques primarily used in weak or weathered zones to maximise core recovery.

The exploration campaign successfully delineated multiple zones of flake graphite mineralisation and substantially improved the geological understanding of the Tanga project area. The integration of detailed mapping, extensive surface sampling, petrographic and mineralogical studies, and nearly 10 kilometres of diamond drilling provided a robust dataset suitable for three-dimensional geological modelling and Mineral Resource estimation. The work confirmed that graphite mineralisation is predominantly hosted within graphitic schist and occurs as medium- to large-flake graphite, as demonstrated through SEM, XRD, FTIR, Raman, and metallurgical analyses.

3.2 Drilling methods

Diamond core drilling was employed exclusively throughout the Tanga Graphite Project, with no reverse circulation or other drilling techniques utilised. A total of 100 drillholes were completed. Of these, 81 drillholes were drilled entirely using HQ core diameter (63.5 mm), while the remaining 19 holes incorporated a combination of HQ and NQ (47.6 mm) core sizes. Drilling was carried out using both standard and triple-tube configurations to optimise core recovery across varying ground conditions. Triple-tube setups were used particularly in weak, highly weathered, or clay-rich zones where enhanced recovery was required.

The drilling is being carried out by a local drilling company Geofields Tanzania Limited, based at Dar es Salaam, Tanzania. Total of five drilling rigs have been used for this purpose till date, out of which one is 'crawler' mounted Zinex A5 (Figure 3.1) and the other four are 'man portable' rigs (Figure 3.2) manufactured by Shandong Zhiqiang Drilling Equipment Co. Ltd.

Core orientation surveys were conducted using the Reflex ACT Coretell tool in three drillholes. The measured foliation orientations corresponded well with geological logging, providing confidence in the structural interpretation. Downhole deviation survey was conducted in 21 drillholes using Reflex EZ-TRAC. The deviation survey results indicated no significant deviation or drift.

For most holes, depths were less than 150 metres, with only one drillhole extending beyond this depth. The drilling procedures, which included the use of appropriate rotational speeds (low RPM), controlled weight-on-bit, and careful recovery handling, consistently yielded high-quality, intact core. In general, core recovery was excellent; however, a small number of drillholes contained intervals where recovery was reduced, and fragmented or weathered material was encountered. These zones, typically associated with loose, clay-rich regolith, resulted in partial core loss even when triple-tube techniques were utilised. All such intervals were logged in detail and incorporated into the quality assessment of drilling data.

Overall, the drilling methods applied were consistent with industry best practices and produced a reliable dataset suitable for geological interpretation and Mineral Resource estimation.

Figure 3.1 Zinex A5 rig drilling a vertical hole

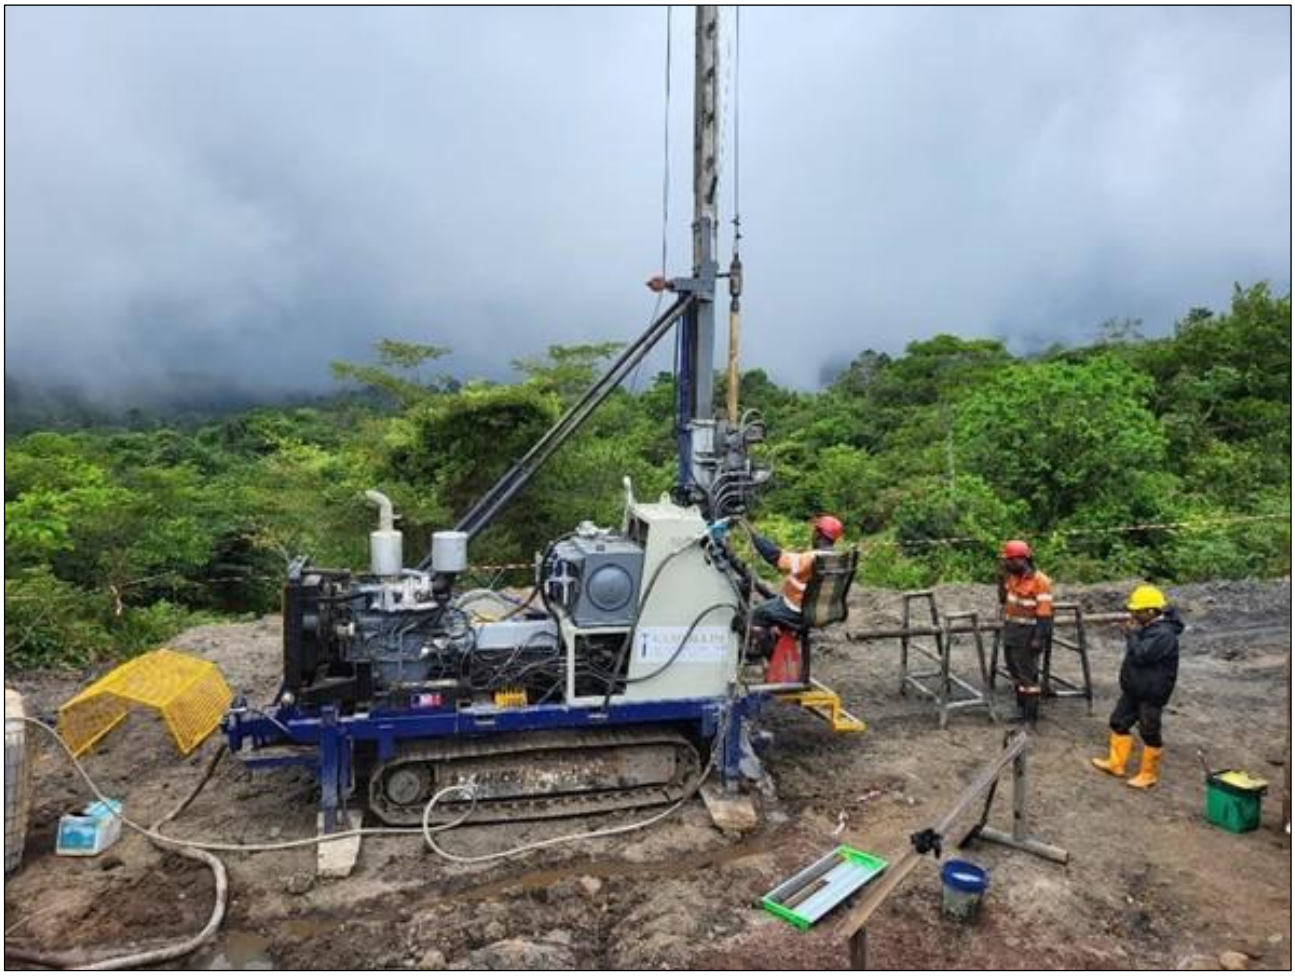


Figure 3.2 Man-portable rig drilling a vertical hole inside forest



3.2.1 Drill sample recovery

To maximise core recovery, double tube HQ and NQ core drilling was used, with the drilling completed by drillers experienced in drilling difficult ground conditions. Drill penetration rates and water pressure were closely monitored to maximise recovery.

During diamond drilling, the length of each drill run, and the length of sample recovered was recorded by the driller (driller's recovery). The recovered sample length was cross checked by the geologists logging the drill core and recorded as the final recovery.

Core recovery was measured and recorded for every drilling run as part of the routine drilling and logging procedure (Figure 3.3). Immediately after retrieval, the recovered core was measured while still in a half-round tray to minimise the risk of breakage and handling-related errors. Once measured, the core was transferred into core boxes, and grooved depth markers containing full run details were placed at the end of each drilling run to ensure long-term clarity and traceability. Photographs of each core box were taken before the core was moved to the core shed, providing a permanent visual record that could be used to verify depth intervals or identify any potential displacement. At the core shed, all depth markings were carefully checked and verified to maintain data integrity and to ensure consistency between drilling records and geological logging.

Figure 3.3 Measuring drilling run



In highly weathered or mechanically weak zones, a triple-tube drilling system was employed to maximise core recovery. Drill parameters, including rotational speed and water pressure, were adjusted to suit the ground conditions, with low RPM and reduced water pressure used consistently to minimise washout of loose or clay-rich material. Sample intervals were modified where necessary to accurately represent the graphitic zones encountered, particularly in intervals where partial recovery occurred. These measures collectively proved effective, and core recovery across the project was generally high.

A review of the drilling dataset demonstrated no systematic relationship between core recovery and TGC grade. Examination of all mineralised intervals across the drillholes showed that TGC values remained consistent regardless of occasional short intervals of reduced recovery. This indicates that

the grade of the lost material is comparable to the grade of the recovered core, and there is no evidence of preferential loss of high- or low-grade material. The TGC grade distribution is instead controlled primarily by lithological domains, which host distinct styles and intensities of graphite mineralisation.

3.2.2 Drillhole collars

All drillhole collar positions for the Tanga Graphite Project were surveyed using high-precision GNSS Real-Time Kinematic (RTK) technology. A total of 100 drillholes established during the exploration program were picked up by a dedicated survey team operating in parallel with the UAV LiDAR topographic survey. The RTK method provided centimetre-level positional accuracy for each collar, ensuring high-quality spatial data for geological interpretation, resource modelling, and mine planning.

Prior to collar surveying, the project established a robust geodetic control framework. Four permanent reference benchmarks (TGB01–TGB04) were set within the project area using GNSS receivers in RTK mode, tied to the national Second Order Control Point T345 under the Tanzania Reference Frame 2011 (TAREF11). These benchmarks formed the positional basis for all subsequent survey work, including drillhole collar pickups. Coordinates were collected in WGS84 UTM Zone 37S, consistent with the primary spatial reference system used for the project.

The surveyors used high-precision GNSS RTK equipment to measure collar locations directly at site (Figure 3.4), and all measurements were validated before being compiled into a final coordinate dataset. The accuracy of the RTK surveys was further supported by independent ground-truthing as part of the LiDAR survey validation, confirming that sub-centimetre horizontal and vertical precision was consistently achieved.

Figure 3.4 RTK drillhole survey operation in the field



Source: Provided by Grapeak

The integration of RTK-derived collar data with the high-resolution LiDAR surface model ensures that drillhole positions are spatially reliable and fully compatible with the digital terrain model used in the MRE. This high-quality spatial dataset provides confidence in geological interpretations, structural correlations, and the spatial integrity of the block model.

3.2.3 Drillhole orientation and density

The drillhole pattern for the Tanga Graphite Project was designed to capture the geometry and continuity of the graphitic schist units that extend consistently across the licence area. The initial drillhole spacing was established at approximately 300 m by 200 m, with transverse drill sections positioned from 350 m to 400 m apart. This configuration provided broad yet effective coverage of the


mineralised corridors and enabled the geological team to develop an initial understanding of the distribution and thickness of the graphite-bearing horizons. Subsequently, drillhole grid density was reduced in some areas to 100 m by 200 m, and in the most intensively drilled zones to 50 m by 50 m. Drillhole depths ranged between 60 m and 150 m, allowing the program to penetrate the full extent of the weathered profile and to test fresh rock mineralisation at depth.

The broader drill spacing was appropriate for the early phases of exploration and proved sufficient to trace mineralised zones across the project area. As the programme advanced, targeted infill drilling—undertaken following recommendations from chartered professionals—confirmed the geological and grade continuity required for the classification of Inferred and Indicated Mineral Resources. The achieved drill density is consistent with industry norms for flake graphite deposits globally and provides a reliable foundation for grade interpolation and three-dimensional geological modelling.

Sampling for assay was carried out on the original drill intervals without pre-submission compositing. This ensured that analytical results reflected true geological variability. Length-weighted compositing was applied only during the resource estimation stage to support modelling requirements, and all compositing procedures were fully documented within the estimation methodology.

The distribution of the drillholes is shown in Figure 3.5.

Figure 3.5 Drillhole collar distribution and drill grid density across the project area

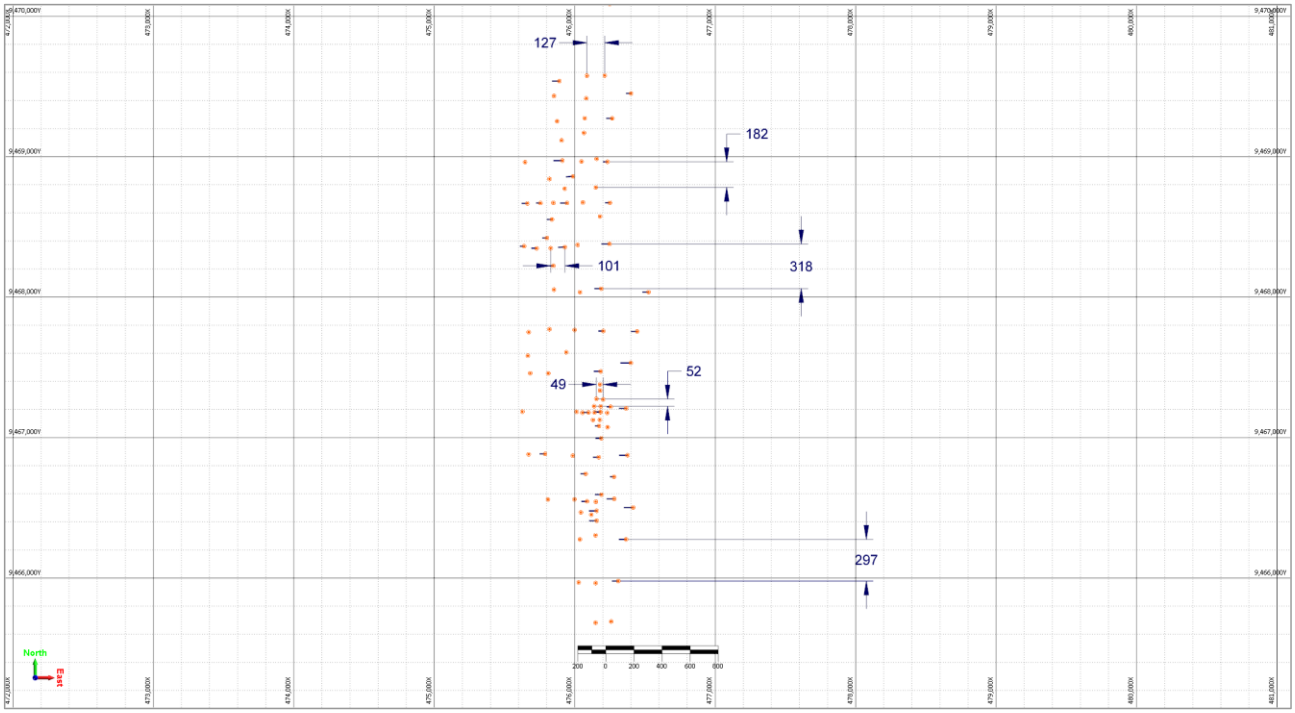

3.3 Surveying

3.3.1 Downhole surveying

Downhole deviation survey has been conducted using Reflex EZ-TRAC in 21 drillholes and all results show no appreciable drift and deviation.


3.3.2 Surface topography

A high-resolution UAV-based LiDAR survey was completed over the Tanga Graphite Project to establish an accurate and reliable representation of the surface topography. The Area of Interest covers

approximately 10.3 km^2 and is characterised by rugged terrain, including steep hills, deeply incised valleys, rolling slopes, and semi-forested areas. These physical conditions made conventional ground-based surveying impractical, and LiDAR technology was selected for its ability to penetrate vegetation and capture the true ground surface with high precision.

The LiDAR point clouds were processed to generate classified ground returns, Digital Terrain Models (DTM), Digital Surface Models (DSM), and detailed contour plans with 0.5 m intervals. Validation using independent GNSS RTK ground-truth points confirmed sub-centimetre vertical and horizontal accuracy, providing high confidence in the derived elevation models. The final deliverables, supplied in WGS84 UTM Zone 37S (with optional ARC1960 transformation), include DTMs, DSMs, contour maps, topographic plans, and cross-sectional profiles, offering a comprehensive and precise representation of the project's surface morphology. The high-resolution terrain model captures the full complexity of the local landscape, enabling accurate drillhole positioning, pit optimisation studies, and hydrological or geotechnical assessments.

Figure 3.6 Sample of topographic map produced

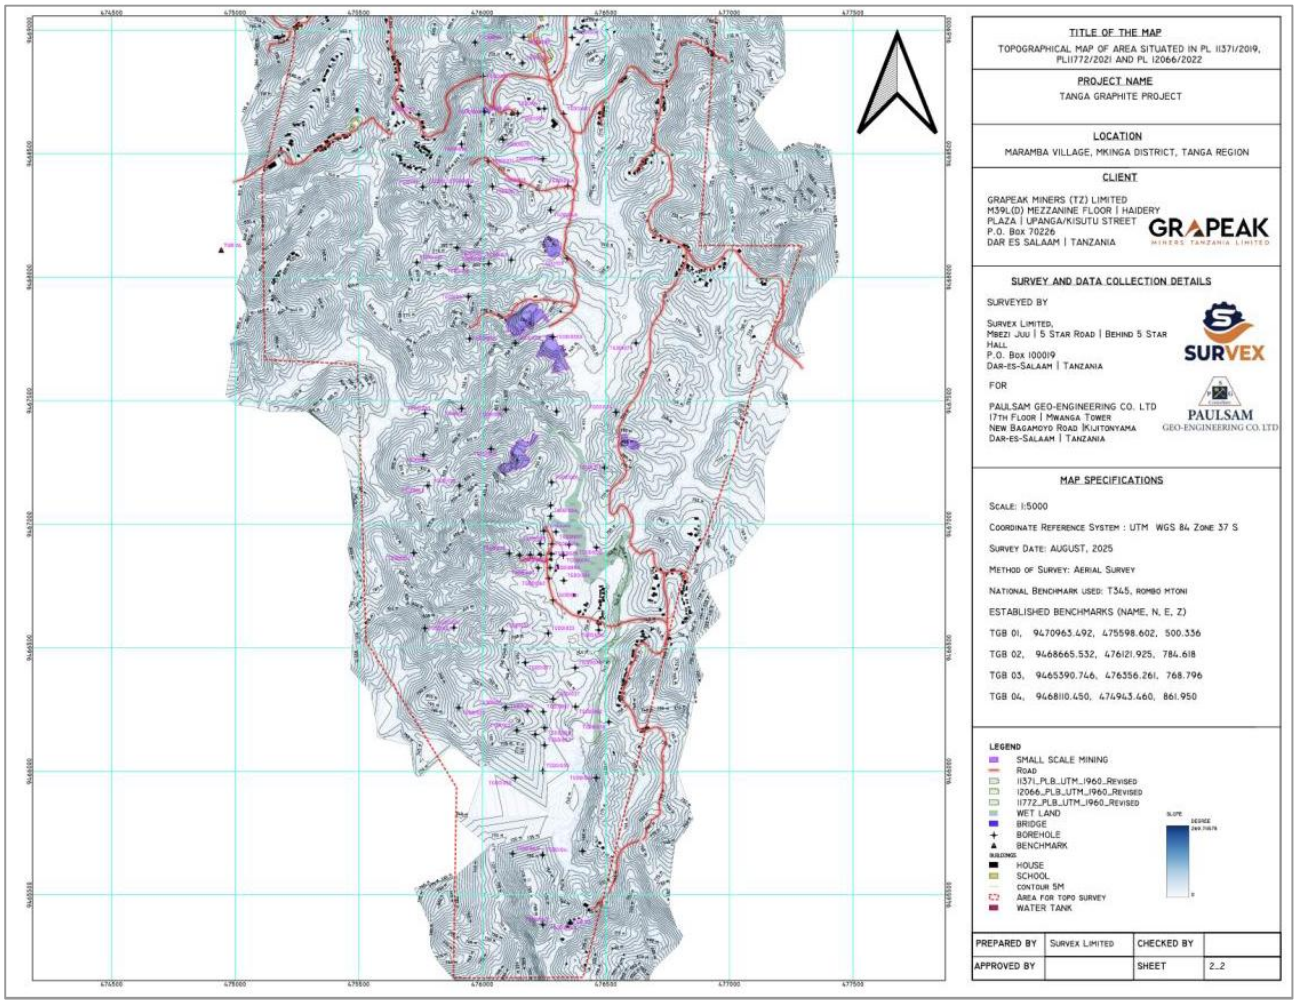

Source: Provided by Grapeak

3.4 Logging, sampling, assaying and data management procedures

Geological logging, sampling, and data management for the Tanga Graphite Project were conducted following industry-standard protocols to ensure the integrity, reliability, and suitability of the dataset for Mineral Resource estimation and geological modelling.

All drill core was logged by qualified geologists, with observations recorded for lithology, graphite flake size and abundance (via visual estimation), alteration characteristics, weathering profile, structural features, and key geotechnical parameters including Rock Quality Designation (RQD) and fracture frequency. The level of detail captured in the logging was sufficient to support geological interpretation, resource modelling, and the development of metallurgical sampling strategies. Logging was initially recorded on paper registers and subsequently transferred into a digital database. Both qualitative and quantitative attributes were captured, including lithological descriptions, alteration styles, drilling diameter, drilling run lengths, core recovery measurements, sampling intervals, and structural orientation data. Particular emphasis was placed on documenting graphitic intervals, lithological boundaries, vein orientations, and other features relevant to the distribution of graphite mineralisation.


A complete geological log was maintained for 100% of the drilled intervals, including both solid core and broken fragments. Logged intervals were routinely cross-checked against drilled metreage to ensure full coverage and allow QAQC validation during modelling.

All full core and representative split-core samples were photographed in dry and wet conditions using a fixed-angle photographic setup with consistent lighting, providing a permanent visual record for reference (Figure 3.7, Figure 3.8). Though, no colour palette was used when photographs were taken.

Figure 3.7 Photo documentation



Figure 3.8 Core box setup for photo documentation

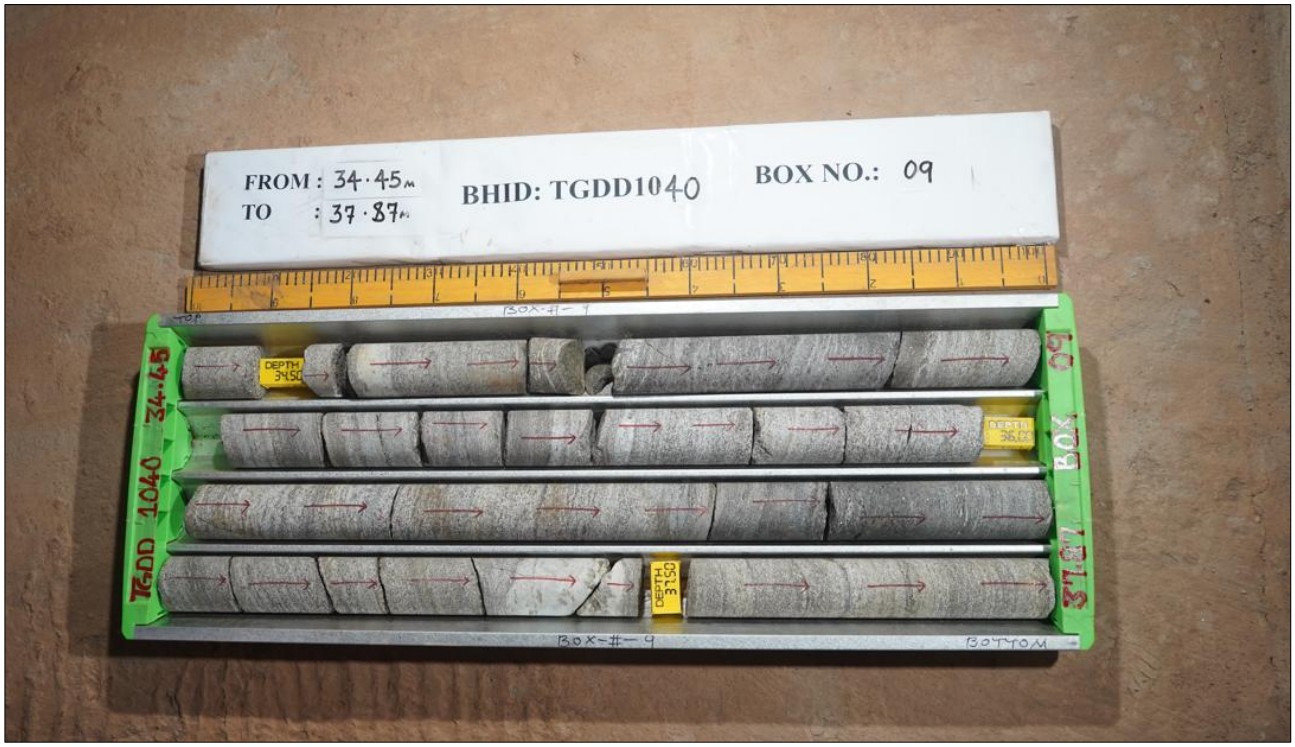

Comprehensive QAQC measures were implemented throughout the sampling and assaying process. Blank samples, certified reference materials (CRMs), and coarse and pulp duplicates were inserted at a frequency of 1 in 10 samples. Laboratory duplicates and replicates were also routinely analysed to monitor preparation and analytical precision. Review of QAQC results demonstrated that analytical performance remained within acceptable limits, with no material issues identified. Coarse and pulp duplicate analyses confirmed good repeatability and did not indicate any systematic bias or heterogeneity.

Data management procedures ensured that all geological, sampling, and QAQC information was accurately captured, verified, and stored in a secure digital database. Regular cross-checking of visual estimates against laboratory results provided an additional layer of validation, and all datasets were maintained in a format suitable for direct integration into 3D modelling and Mineral Resource estimation workflows.

3.4.1 Sampling

Core sampling was undertaken after detailed geological marking. Diamond core was cut lengthwise using a diamond saw (Figure 3.10). In general, quarter-core samples were collected for laboratory analysis, with the remaining three-quarters retained for reference, metallurgical selection, or duplicate testing as required. In zones of poor core recovery, half-core samples were taken to ensure adequate sample mass, while in certain well-recovered intervals, sample lengths of up to 2 m were maintained. At geological boundaries or domain transitions, sample intervals of less than 2 m were used to avoid mixing lithological or mineralised domains. All cores selected for sampling were pre-marked with a cut line (Figure 3.9), and wet core was air-dried prior to splitting to avoid weight or moisture-related bias. Fragmented intervals without solid core were also sampled carefully, with close attention paid to the quality of adjoining intervals.

Figure 3.9 Logged drill core with cut line and sampling intervals marked

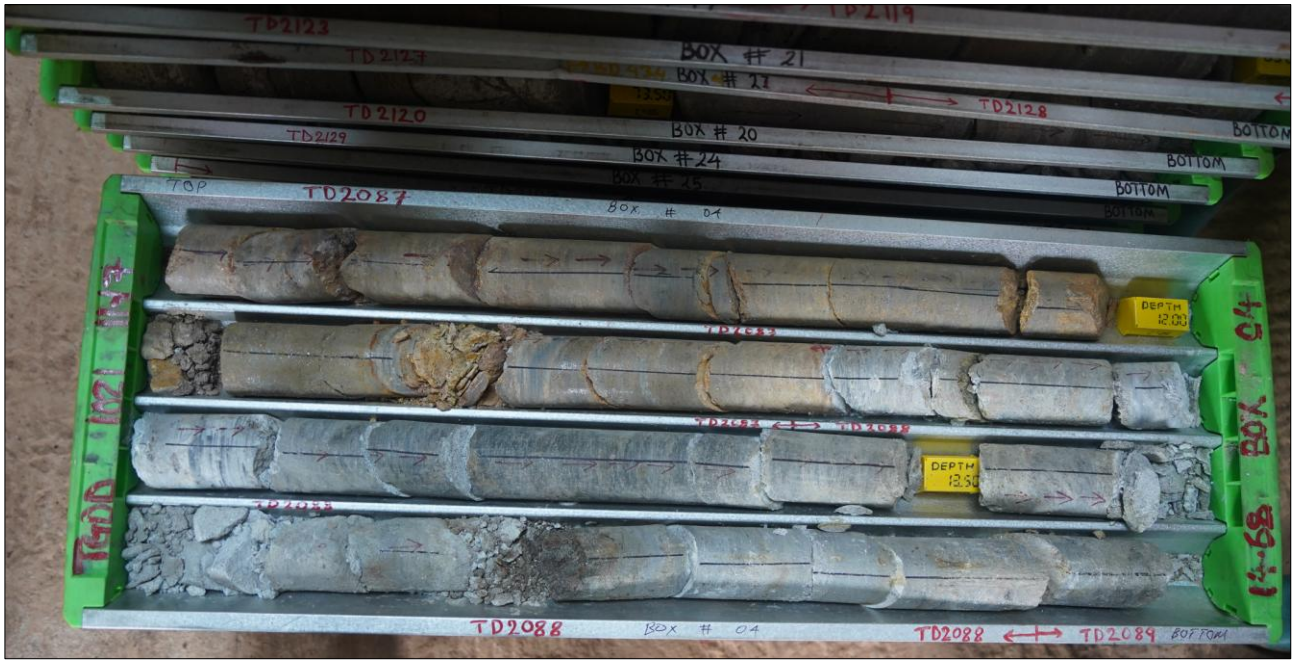


Figure 3.10 Diamond saw and cut core



All sample preparation followed a consistent Standard Operating Procedure (SOP) applied across both surface and core sampling stages. Samples were prepared at SGS Mwanza (Tanzania) (Figure 3.11), a certified laboratory. Preparation included drying, crushing to <2 mm, splitting, and pulverising to 85% passing 75 µm, which is appropriate for graphite analysis and consistent with industry norms. Sample quantities for routine analysis ranged from 2 to 3 kg for quarter-core, half-core, and grab samples. Petrographic samples were taken as representative hand specimens, while powder quantities for SEM, Raman spectroscopy, and FTIR analyses were limited to approximately 50 g.

Figure 3.11 SGS laboratory in Mwanza



3.4.2 Assaying

Laboratory assaying for the Tanga Graphite Project was undertaken using industry-standard methods to ensure accuracy, precision, and suitability of the analytical results for Mineral Resource estimation. All samples—comprising quarter-core, half-core, grab samples, and selected petrographic or metallurgical materials—were submitted to SGS Mwanza (Tanzania), a certified commercial laboratory with established expertise in graphite analysis.

Prior to dispatch, all samples were subjected to controlled preparation procedures. Core samples were air-dried where required, crushed to <2 mm, split to obtain representative aliquots, and pulverised to achieve 85% passing 75 µm. These steps ensured homogeneity of the sample pulp and minimised the risk of particle.

Analytical determination of TGC and Total Sulfur was conducted using infrared (IR) combustion methods. Approximately 30 g of pulverised material was analysed per sample. IR combustion is considered the most reliable technique for graphite deposits, providing accurate quantification of carbon species after removal of carbonates and other non-graphitic forms. This method is widely used in the graphite industry and allows consistent comparison with peer projects and established reporting standards.

3.4.3 In situ bulk density

Several methods were used to determine the bulk density of the in-situ core drilling samples. Those methods were used depending upon the material quality, e.g. fresh competent core vs friable oxidised or kaolinised core.

Four bulk density methods were used:

1 **Wax-coated core**, using a graduated beaker to determine volume.

2 **Calliper** to determine core volume based on core length and diameter

3 **Uncoated core**, using a density balance to determine mass of core in air and in water. This is known as the 'Archimedes' method.

4 **Whole core tray**.

During the initial exploration phase, bulk density was measured by the wax method. Later the Archimedes method was used for fresh core, augmented by the calliper method as well as the whole core tray method (Table 3.1).

Table 3.1 Summary of methods relative to number of holes and individual samples

Method	Number of drillholes	Number of BD samples
Wax coating (Archimedes)	82	540
Calliper	53	381
Water vs Air density scale (Archimedes)	17	85
Whole core tray	45	474 (trays)

Method descriptions:

1 **Wax method**: In this method, the bulk density of the core sample was determined according to the water displacement method (also known as the Archimedes principle). The core sample was initially weighed, then wax-coated before re-weighing. The wax coated core was and immersed into a beaker of water to measure the volume change. From this, the volume of core plus wax could be calculated (the volume of water displaced) and after accounting for the volume of wax the bulk density was calculated. The reason for wax coating is to prevent ingress of water into the core. This method was best suited for hard, intact and smooth surfaced core samples without fractures (Figure 3.12).

2 **Calliper Method**: This method was based on the geometrical calculation to measure the bulk density. The length and width of cylindrical core samples were taken and then the volume was calculated from those readings. The weight was also measured. From the weight and volume, the bulk density of the respective sample was calculated. This method was very easy to use and can apply for any solid or porous core sample. This method was introduced in the middle stage of the drilling programme (Figure 3.13).

3 **Density Scale**: The density scale method measured bulk density using the Archimedes principle. Here, instead of wax-coating core samples the core was directly submerged in water and weighed. From the differences of the weight change (weight in air minus weight in water) the volume is calculated and the relative density determined based on dry weight. This method was also easy to use. But it was applicable for solid core samples with very low porosity, porous samples absorb some water and the measurement would not be accurate. From the results of the Tanga Drilling project, it was observed that the values were very close to the bulk density measured by other methods (Figure 3.13).

4 **Core Tray method**: This is also a geometric method to determine the bulk density of the core samples of the entire core box. Here the average core diameter and total core length present in the core box were measured and the total volume was calculated. This method benefits from the volume variance effect, in which the larger the sample the more representative it is. From this, the bulk density was calculated. This method gave an idea of the bulk density of the core present in the core box. However, if multiple lithology units are present within a single tray, this can make it difficult to derive the bulk density of any individual lithology (Figure 3.14).

Comparison Between bulk density results from different methods:

- A comparison study has made based on a total of 79 samples. The bulk density values for those samples are measured by all four bulk density methods for cylindrical core i.e. wax method, calliper method, density scale and core tray method. The results are presented in Figure 3.15. The CP notes that density is dependent not only on primary lithologies but is also affected by weathering and oxidation. Densities are noted visually to be approximately 2.0 t/m^3 in the oxide zone, compared with approximately 2.7 t/m^3 in fresh graphite mineralisation (Figure 3.16).

Figure 3.12 Wax coated core (L) and being immersed in water to measure displaced volume (R)



Figure 3.13 Density scale method (weight in air and water) (L) and calliper method (R)



Figure 3.14 Whole core tray method. Measure diameter of core (L) and weigh whole core tray (R)



Figure 3.15 Relationships between different bulk density measurement methods


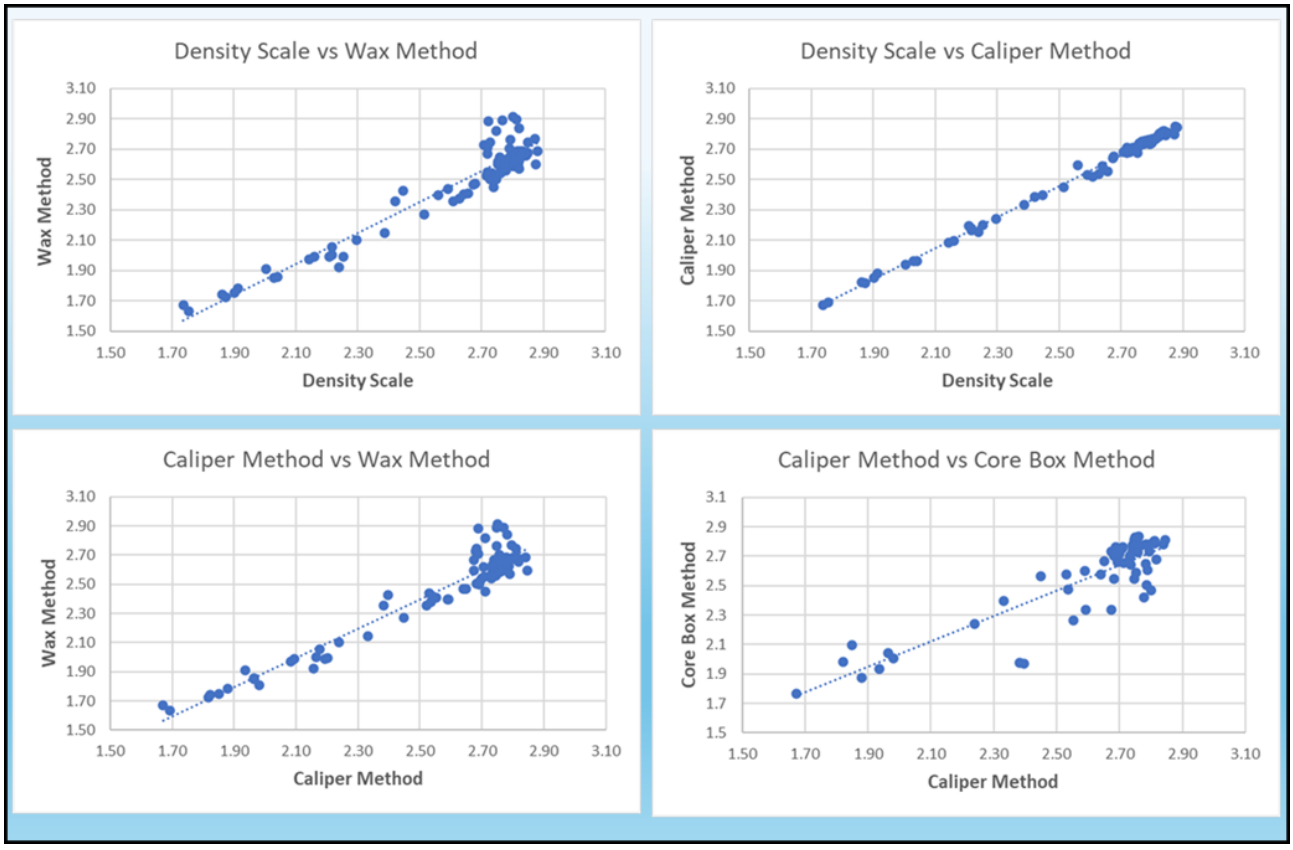


Figure 3.16 Example cross section comparing density (t/m^3) by four different methods, relative to weathering domains

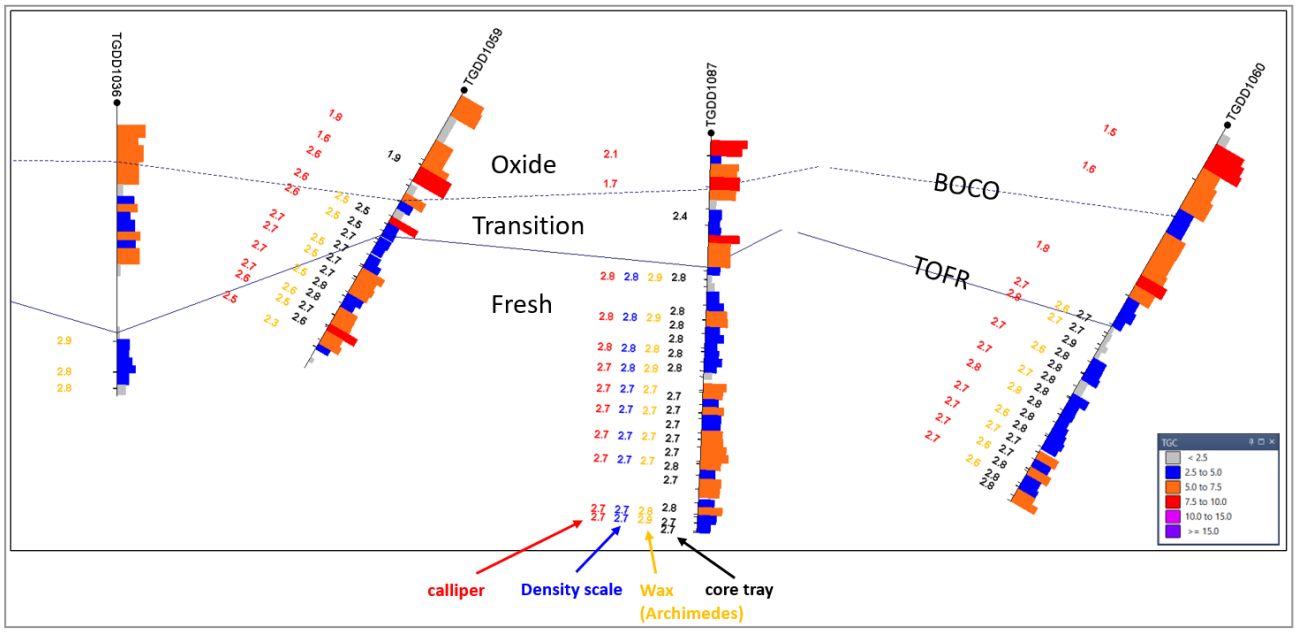

3.4.4 Analytical quality control (QAQC) procedures and data

The quality of any exploration data depends on the sample collection, sample preparation and analytical techniques adopted, as well as implementation of a quality assurance/quality control (QAQC) program. QAQC programs should be implemented at all exploration stages, including drilling, collection of all types of samples, sample preparation and analysis, determination of sample density, collection of geotechnical data, data digitisation, data storage and other associated aspects.

QAQC may be implemented through several steps, which may include (but not limited to) adding blank samples, Certified Reference Material (CRMs), and various duplicate samples.

Grapeak has used the following QAQC data to monitor the quality and accuracy of assay from drilling:

- CRM (independently prepared commercial standards) are used to monitor assay accuracy and bias.
- Blanks are used to monitor cross contamination.
- Coarse duplicates are collected after sample preparation at the primary crusher or jaw crusher. These duplicates consist of crushed material at approximately 2 mm particle size. They are used to monitor the precision of the coarse crushing stage and to assess the consistency and potential contamination introduced during the early stages of sample preparation.
- Pulp duplicates are collected after sample preparation at the secondary crusher or pulveriser. At this stage, samples are typically pulverised to a particle size of 75 µm, with at least 85% of the material passing this threshold. The laboratory prepares four homogenised pulp sachets for each sample. One sachet is used for the primary analysis, while one of the remaining sachets is selected for pulp duplicate analysis. Pulp duplicates are used to assess the precision of the pulverising stage and to evaluate the analytical repeatability of the prepared pulp. Because the pulp is homogenised, pulp duplicates are primarily a measure of laboratory analytical precision rather than sampling or preparation variability.

A QAQC sample was inserted every 10 samples within the sampling sequence (approximately 10% of the samples submitted for analysis).

The CRM data from drilling used for the resource estimation was assessed using Standard Control Plots. These plot the assay results of a CRM over time. The results can be compared to the expected value, and the second and third standard deviation lines are also plotted.

The QAQC results were reviewed for each batch before loading the data into the database. All batches returned results with acceptable tolerances.

AMC reviewed Tanga QAQC assay results only for drilling campaigns between 2024 and 2025. Table 3.2 provides a summary for the QAQC samples used in recent drilling.

Table 3.2 Control samples used during 2024 to 2025 drilling campaign

Sample Type	Number of Samples	QAQC Sample Percentage
CRM	93	2.8
Blanks	94	2.8
Coarse Duplicates	93	2.8
Pulp Duplicates	93	2.8
Total QAQC	**373**	**11.1**

3.4.5 Quality control results

3.4.5.1 Blank material

The blanks were collected from the Nzega area, consisting of granites from the Kavirondian Group. These granite samples were previously used as field blanks during the grab sample analyses and did not contain any significant traces of graphitic carbon. For this reason, the same granites were used as blanks for the drilling programme.

Blanks and CRMs are supplied together with the field samples. However, the CRMs are pulps, and the blanks are represented by rock material. CRMs or blanks are bagged and labelled with the sample number assigned the same way as the regular samples.

A total of 94 blank samples were analysed. Of all the blank material sampled, most had very low values reported. The blank values indicate that there is very little contamination overall.

Table 3.3 Blank assay results

Element	Minimum	Maximum	Mean	Median
TGC (%)	<0.05	<0.05	<0.05	<0.05

3.4.5.2 CRM GGC-08


GGC-08 is a graphite CRM prepared by Geostats Pty Ltd. The material was sourced from flake graphite, Halls Creek, Western Australia.

For GGC-08 the warning limit was assumed to be 1 standard deviation. Total of 18 samples were analysed, and no samples were outside of the action limits (Figure 3.17). This shows that the actual grades are close to the expected CRM mean, which gives confidence in the accuracy of the primary laboratory.

Table 3.4 GGC-08 CRM grades

Reference	Number of samples	Element	Grade (%)	Standard Deviation
GGC-08	18	Graphitic Carbon	0.39	0.06

Figure 3.17 Shewhart control chart – GGC-08

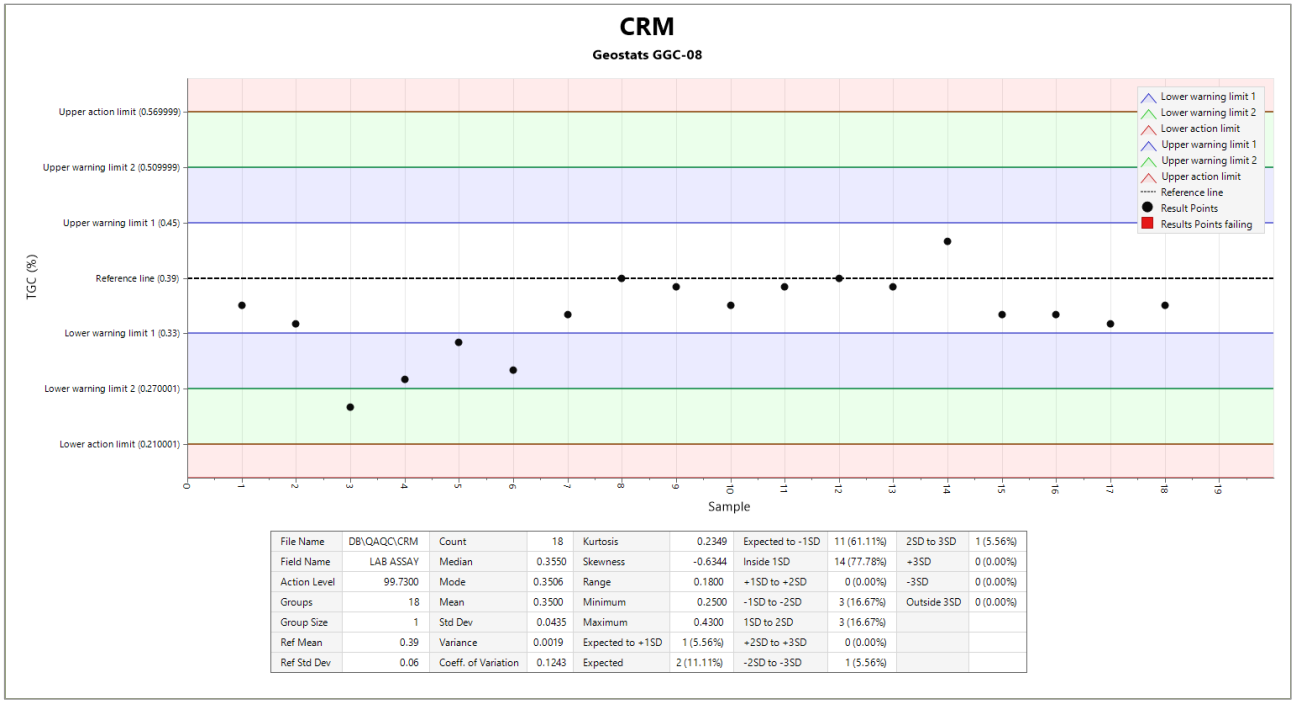

3.4.5.3 CRM GGC-09


GGC-09 is a graphite CRM prepared by Geostats Pty Ltd. The material was sourced from flake graphite, Halls Creek, Western Australia.

For GGC-08 the warning limit was assumed to be 1 standard deviation. Total of 19 samples were analysed, and no samples were outside of the action limits (Figure 3.18). This shows that the actual grades are close to the expected CRM mean, which gives confidence in the accuracy of the primary laboratory.

Table 3.5 GGC-09 CRM grades

Reference	Number of samples	Element	Grade (%)	Standard Deviation
GGC-09	19	Graphitic Carbon	2.41	0.27

Figure 3.18 Shewhart control chart – GGC-09

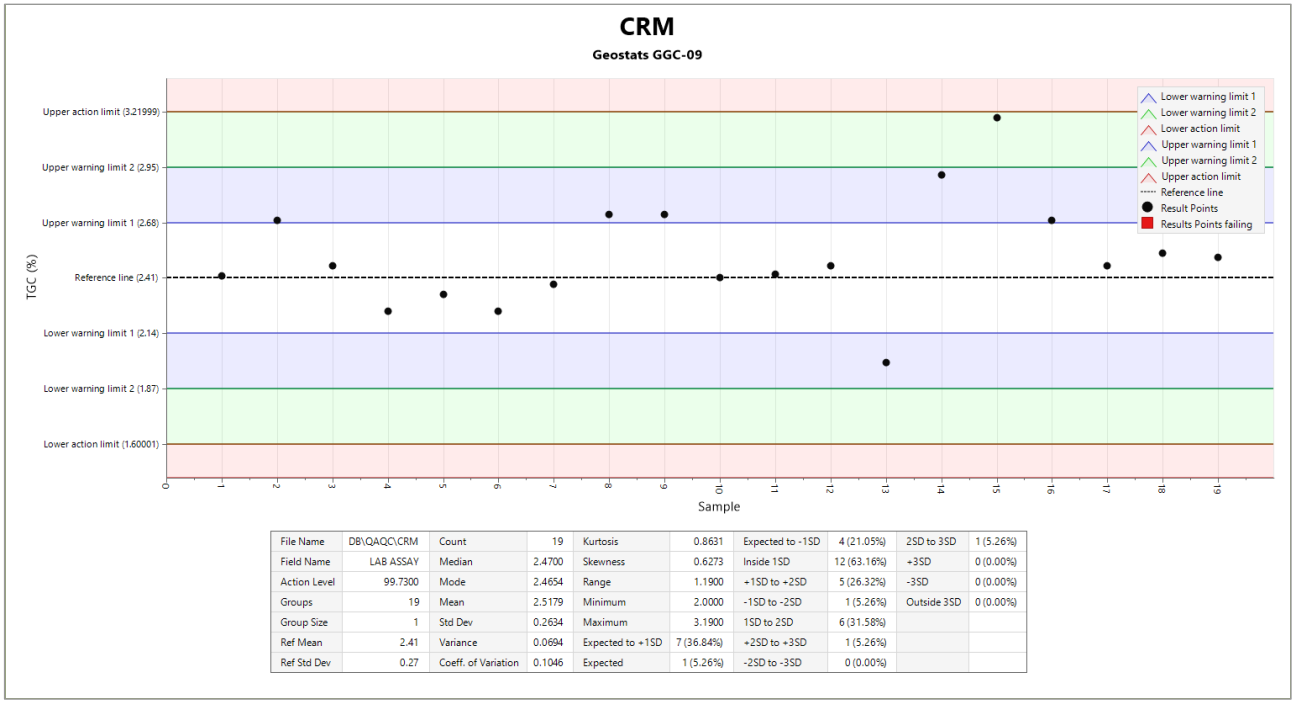

3.4.5.4 CRM GGC-11


GGC-11 is a graphite CRM prepared by Geostats Pty Ltd. The material was sourced from graphite, Madagascar.

For GGC-11 the warning limit was assumed to be 1 standard deviation. Total of 19 samples were analysed, and no samples were outside of the action limits (Figure 3.19). This shows that the actual grades are close to the expected CRM mean, which gives confidence in the accuracy of the primary laboratory.

Table 3.6 GGC-11 CRM grades

Reference	Number of samples	Element	Grade (%)	Standard Deviation
GGC-11	19	Graphitic Carbon	4.977	0.158

Figure 3.19 Shewhart control chart – GGC-11

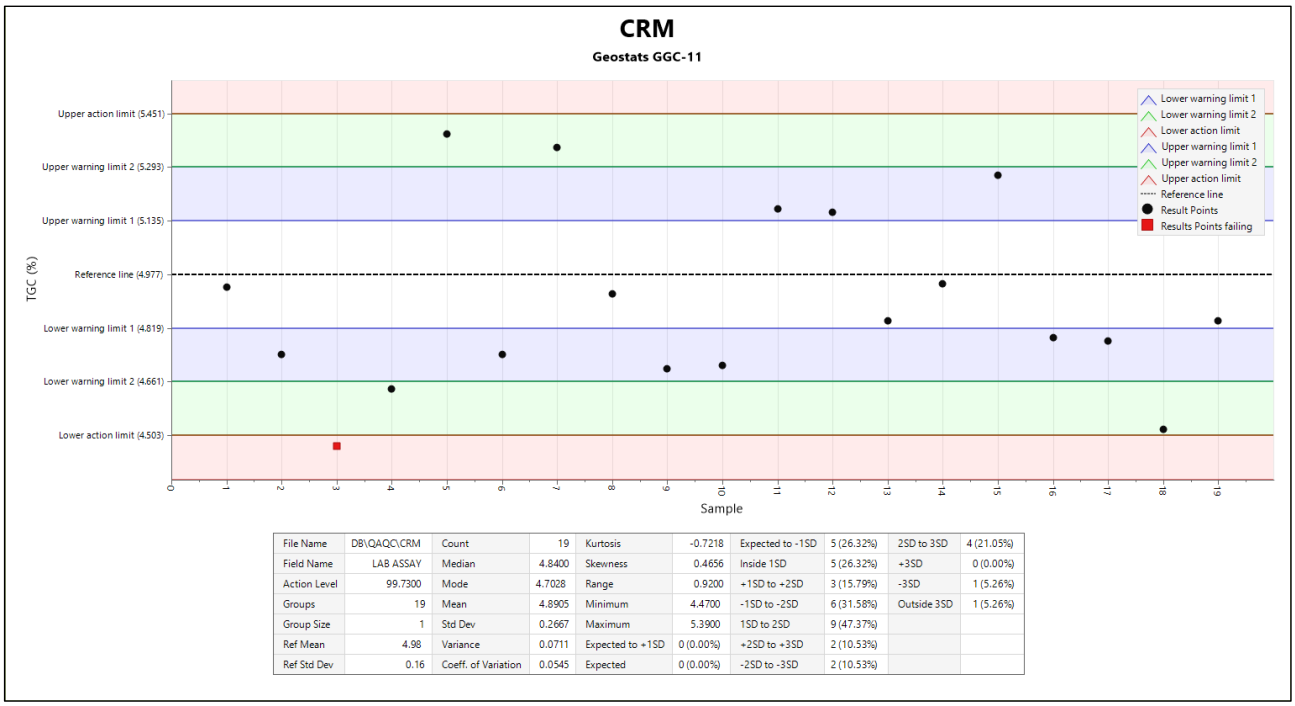

File Name	DB\QAQC\CRM	Count	19	Kurtosis	-0.7218	Expected to -1SD	5 (26.32%)	2SD to 3SD	4 (21.05%)
Field Name	LAB ASSAY	Median	4.8400	Skewness	0.4656	Inside 1SD	5 (26.32%)	+3SD	0 (0.00%)
Action Level	99.7300	Mode	4.7028	Range	0.9200	+1SD to +2SD	3 (15.79%)	-3SD	1 (5.26%)
Groups	19	Mean	4.8905	Minimum	4.4700	-1SD to -2SD	6 (31.58%)	Outside 3SD	1 (5.26%)
Group Size	1	Std Dev	0.2667	Maximum	5.3900	1SD to 2SD	9 (47.37%)		
Ref Mean	4.98	Variance	0.0711	Expected to +1SD	0 (0.00%)	+2SD to +3SD	2 (10.53%)		
Ref Std Dev	0.16	Coeff. of Variation	0.0545	Expected	0 (0.00%)	-2SD to -3SD	2 (10.53%)		

3.4.5.5 CRM GGC-13


GGC-13 is a graphite CRM prepared by Geostats Pty Ltd. The material was sourced from flake graphite, Ancuabe, Mozambique.

For GGC-13 the warning limit was assumed to be 1 standard deviation. Total of 19 samples were analysed, and no samples were outside of the action limits (Figure 3.20). This shows that the actual grades are close to the expected CRM mean, which gives confidence in the accuracy of the primary laboratory.

Table 3.7 GGC-13 CRM grades

Reference	Number of samples	Element	Grade (%)	Standard Deviation
GGC-13	19	Graphitic Carbon	7.99	0.57

Figure 3.20 Shewhart control chart – GGC-13

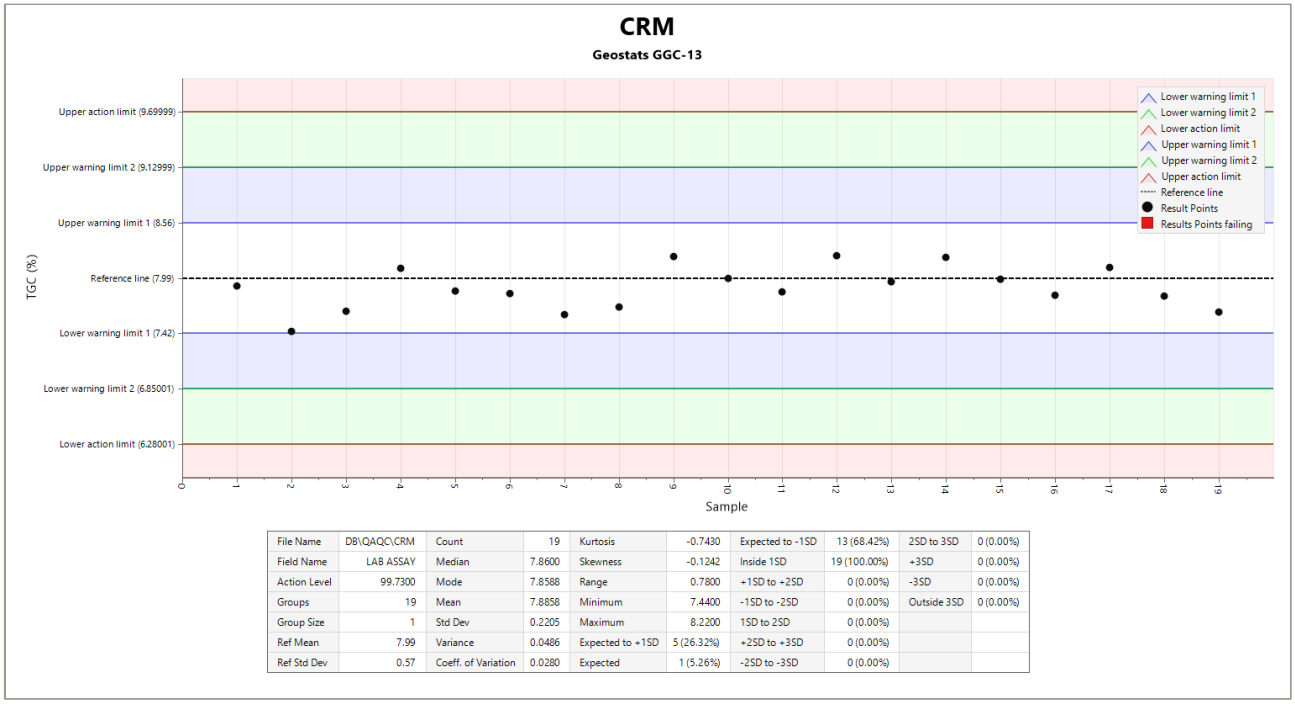

File Name	DB\QAQC\CRM	Count	19	Kurtosis	-0.7430	Expected to -1SD	13 (68.42%)	2SD to 3SD	0 (0.00%)
Field Name	LAB ASSAY	Median	7.8600	Skewness	-0.1242	Inside 1SD	19 (100.00%)	+3SD	0 (0.00%)
Action Level	99.7300	Mode	7.8588	Range	0.7800	+1SD to +2SD	0 (0.00%)	-3SD	0 (0.00%)
Groups	19	Mean	7.8858	Minimum	7.4400	-1SD to -2SD	0 (0.00%)	Outside 3SD	0 (0.00%)
Group Size	1	Std Dev	0.2205	Maximum	8.2200	1SD to 2SD	0 (0.00%)		
Ref Mean	7.99	Variance	0.0486	Expected to +1SD	5 (26.32%)	+2SD to +3SD	0 (0.00%)		
Ref Std Dev	0.57	Coeff. of Variation	0.0280	Expected	1 (5.26%)	-2SD to -3SD	0 (0.00%)		

3.4.5.6 CRM GGC-14


GGC-13 is a graphite CRM prepared by Geostats Pty Ltd. The material was sourced from flake graphite, Ancuabe, Mozambique.

For GGC-14 the warning limit was assumed to be 1 standard deviation. Total of 18 samples were analysed, and no samples were outside of the action limits (Figure 3.21). This shows that the actual grades are close to the expected CRM mean, which gives confidence in the accuracy of the primary laboratory.

Table 3.8 GGC-14 CRM grades

Reference	Number of samples	Element	Grade (%)	Standard Deviation
GGC-14	18	Graphitic Carbon	9.23	0.53

Figure 3.21 Shewhart control chart – GGC-14

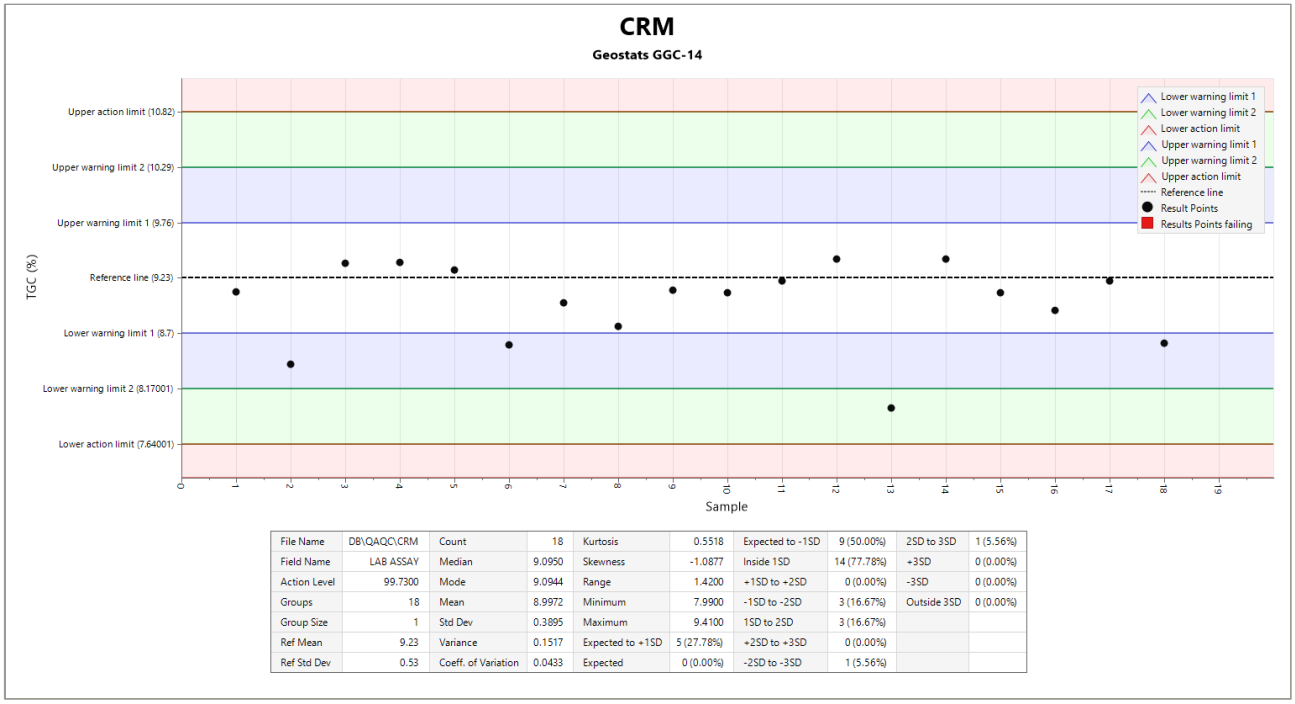


File Name	DB\QAQC\CRM	Count	18	Kurtosis	0.5518	Expected to -1SD	9 (50.00%)	2SD to 3SD	1 (5.56%)
Field Name	LAB ASSAY	Median	9.0950	Skewness	-1.0877	Inside 1SD	14 (77.78%)	+3SD	0 (0.00%)
Action Level	99.7300	Mode	9.0944	Range	1.4200	+1SD to +2SD	0 (0.00%)	-3SD	0 (0.00%)
Groups	18	Mean	8.9972	Minimum	7.9900	-1SD to -2SD	3 (16.67%)	Outside 3SD	0 (0.00%)
Group Size	1	Std Dev	0.3895	Maximum	9.4100	1SD to 2SD	3 (16.67%)		
Ref Mean	9.23	Variance	0.1517	Expected to +1SD	5 (27.78%)	+2SD to +3SD	0 (0.00%)		
Ref Std Dev	0.53	Coeff. of Variation	0.0433	Expected	0 (0.00%)	-2SD to -3SD	1 (5.56%)		

3.4.5.7 Coarse duplicates

93 samples were submitted as coarse duplicates.

Figure 3.22 Simple linear regression of TGC(%) for coarse duplicates

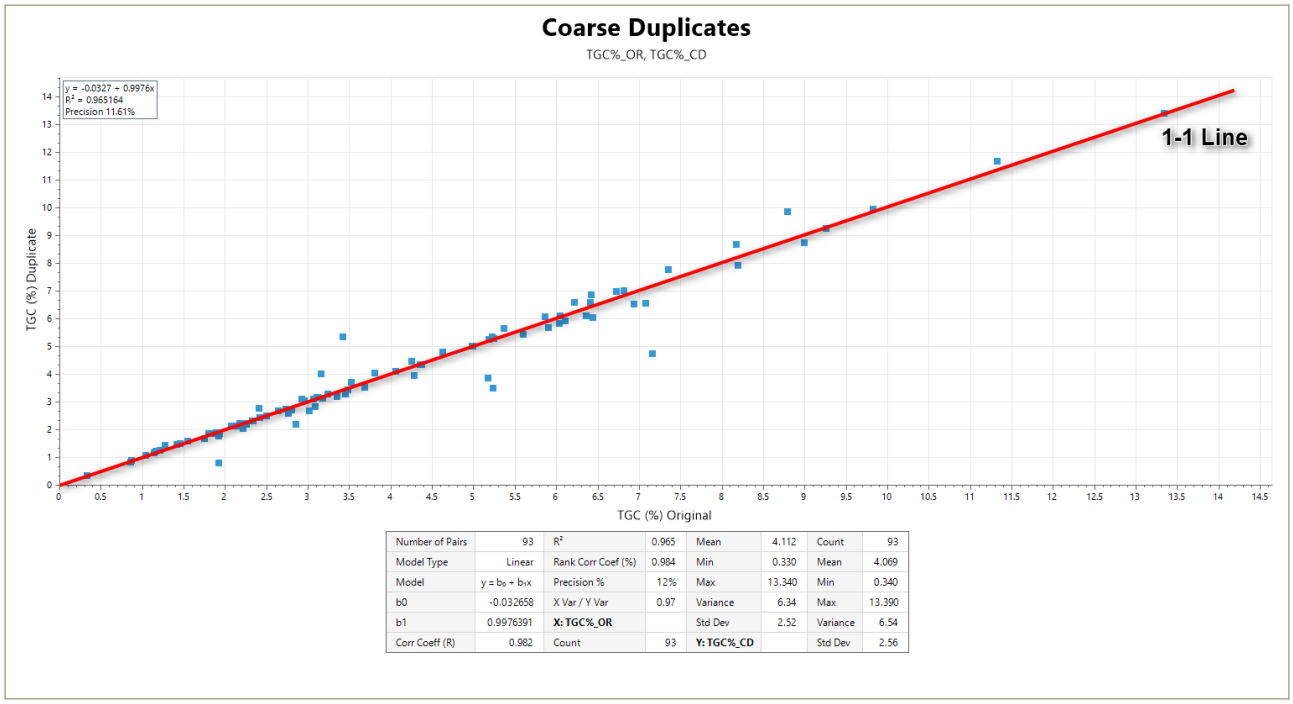


Number of Pairs	93	R^2	0.965	Mean	4.112	Count	93
Model Type	Linear	Rank Corr Coef (%)	0.984	Min	0.330	Mean	4.069
Model	$y = b_0 + b_1x$	Precision %	12%	Max	13.340	Min	0.340
b0	-0.032658	X Var / Y Var	0.97	Variance	6.34	Max	13.390
b1	0.9976391	**X: TGC%_OR**		Std Dev	2.52	Variance	6.54
Corr Coeff (R)	0.982	Count	93	**Y: TGC%_CD**		Std Dev	2.56

The laboratory results for TGC show relatively good repeatability with the statistics and plots (Figure 3.22) showing similar distributions. Tests for all laboratory results were conducted with a precision of ±12% and correlation coefficient over 98% which are within the acceptable limits and pose a low risk on the assay precision.

3.4.5.8 Pulp duplicates

93 samples were submitted as pulp duplicates.

Figure 3.23 Simple linear regression of TGC (%) for pulp duplicates

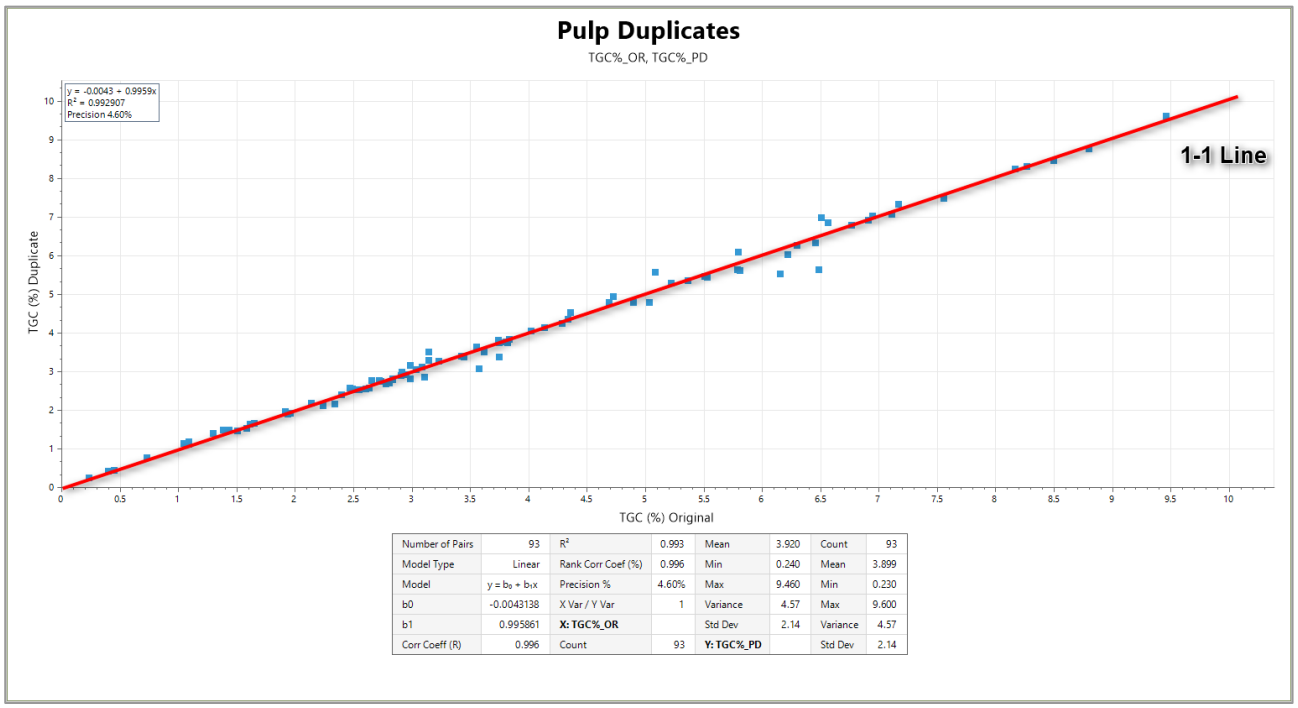

Number of Pairs	93	R^2	0.993	Mean	3.920	Count	93
Model Type	Linear	Rank Corr Coef (%)	0.996	Min	0.240	Mean	3.899
Model	$y = b_0 + b_1x$	Precision %	4.60%	Max	9.460	Min	0.230
b0	-0.0043138	X Var / Y Var	1	Variance	4.57	Max	9.600
b1	0.995861	**X: TGC%_OR**		Std Dev	2.14	Variance	4.57
Corr Coeff (R)	0.996	Count	93	**Y: TGC%_PD**		Std Dev	2.14

The laboratory results for TGC show relatively good repeatability with the statistics and plots (Figure 3.22) showing similar distributions. Tests for all laboratory results were conducted with a precision of ±4.6% and correlation coefficient over 99.5% which are within the acceptable limits and pose a low risk on the assay precision.

3.4.6 Data management

An industry-standard chain of custody procedures from the extraction of the core at the drill rig, through logging and sampling up to the point of dispatch to the sample preparation laboratory were applied under the control and supervision of Grapeak and its on-site personnel.

The drill core is extracted by a drilling crew which is directly contracted by Grapeak. The core is placed by the driller in core boxes. Markers are placed in the core boxes clearly indicating the hole depth at the end of each drill run. Each box is labelled by a permanent marker with a drillhole number, box number and from and to depths.

The core boxes are regularly transported to the core storage facility in Karaganda.

Core samples were stored at the core yard and core shack under lock and key before delivery to the laboratory for sample preparation.

In the sample preparation laboratory, each sample underwent the entire processing cycle in compliance with all necessary requirements for the preservation of samples and the prevention of their contamination.

3.4.7 Data verification

Recently drilled core was viewed extensively by the Competent Person (CP; Serikjan Urbisinov) during the site visit.

A review of the sampling techniques and data was carried out by the CP during the site visit. The sampling techniques were appropriate, and data deemed to be of sufficient quality to carry out resource estimation.

Visual validation of the drillhole locations and mineralised intersections was undertaken against hard copy drill sections. The drillholes used were considered acceptable for reporting an MRE under the JORC Code guidelines.

3.4.8 Summary

Based on an assessment of the data, the CP considers the dataset to be acceptable for resource estimation with assaying posing minimal risk to the overall confidence level of the MRE. Table 3.9 below contains the summary of the QAQC analysis.

Table 3.9 Summary QAQC

Items	Discussion	Confidence
Drilling techniques	Standard industry methods of diamond drilling were for recent drilling.	High
Drill sample recovery	Drill core recovery was adequate.	Medium
Sampling techniques and sample preparation	Half and quarter core samples were collected according to industry standard methods. The sample preparation appears appropriate.	High
Quality of assay data	Appropriate assay methods used throughout the programmes. The QAQC protocol is to industry standard.	Moderate to High
Assay precision	CRMs, blank, pulp and field duplicate material were routinely submitted to the laboratory and found to have satisfactory results.	Moderate to High
Assay bias	CRMs were used to estimate the sampling bias. There appears to be little to no laboratory assay bias.	High
Location of sampling points	Details of the collar survey method were provided, and collar locations were independently verified.	High
Database integrity	Data entered from original sources and paper documents, transferred into electronic database, and later confirmed as being true and accurate.	High
Bulk density determinations	Measurements were routine and sufficient for industry standards.	High

4 Tanga Mineral Resource estimate

4.1 Introduction

AMC developed a Mineral Resource block model, estimating all grades using an ordinary kriging process, analytical dataset, and lithological domaining of the deposit.

4.2 Geological modelling

Geological modelling and grade estimation by AMC utilised Micromine 2025 (Build 25.0.5164) software.

4.2.1 Data import and validation

All drillhole data was provided by Grapeak in Microsoft Excel format. The Excel files were imported into Micromine software. The supplied key data files are listed in Table 4.1.

Table 4.1 Data provided for the MRE

Data	DAT files
Collar coordinate data files	DH_Collar.DAT
Drillhole analytical data files	DH_Assay.DAT
Downhole survey data Logged geology	DH_Survey.DAT DH_Geology.DAT
Logged geotechnical and core recovery data	DH_Geotech.DAT
Recorded density data for core tray method	DH_Density_Core_Tray.DAT
Recorded density data for wax, scale, calliper methods	DH_Density_Wax_Scale_Caliper.DAT

All data are stored using the same coordinate system and the same unit convention. Therefore, transformations of drillhole or other data were not required.

Validation of the data was then completed, which included checks for:

- Duplicate drillhole names.
- One or more drillhole collar coordinates missing in the collar file.
- FROM or TO missing or absent in the assay files.
- FROM > TO in the assay files.
- Sample intervals are not contiguous in the assay file (gaps exist between the assays).
- Sample intervals overlap in the assay files.
- First sample is not equal to 0 m in the assay files.
- Total depth of the holes is less than the depth of the last sample.

The database validation processes did not identify any critical errors in the supplied databases.

The topography DTM was validated to make sure that it covered the areas of the modelled deposit.

The validated and adopted data from the drilling databases for the MRE are summarised in Table 4.2.

Table 4.2 Summary of supplied and validated data used for the MRE update

Data	Information
Workings/Drillholes	100
Metres Driven/Drilled	9,421.4
Assay Records	3,355
Assay intervals (in metres)	7,892.65
Downhole survey records	248
Lithology, weathering, alteration logged records	1,248
Geotechnical, core recovery records	5,321

4.2.2 Preliminary Statistical Analysis

AMC carried out statistical analysis of the analytical data twice.

Initial classical statistical analysis is usually carried out to determine natural mineralisation threshold grades to allow for interpretation of boundaries to the mineralisation. When interpretation of mineralisation and wireframing were completed, all samples were coded by wireframe models to flag samples that lie inside and outside interpreted mineralised zones. Classical statistical analysis was then repeated for the samples selected within the mineralisation wireframes. The aim of the second analysis was:

- To determine the type of grade distribution within the mineralised zones.
- To obtain statistical parameters for element grades within each domain.
- To review the possible mixing of grade populations.
- To review the necessity and possibility of separation of grade populations if more than one population exists.
- To determine a top cut value for grade interpolation.


4.2.2.1 Threshold Grade Determination

AMC carried out statistical analysis for TGC grades to determine the natural threshold grade for all mineralised zones combined.

Classical statistical analysis of graphite grades demonstrated multiple populations. Based on the results, AMC chose to interpret the graphite mineralisation using a 3% TGC threshold grade. Figure 4.1 shows a histogram of TGC values.

A cut-off grade of 3% TGC was selected to define the interpreted mineralised envelopes. This threshold is supported by statistical analysis of the TGC assay population, which shows a break between background metasedimentary values and consistently elevated graphite grades. The histogram demonstrates that samples below 3% TGC form a broad, low-grade population representing weakly graphitic or barren schist, whereas values equal to or above 3% TGC correspond to the visually distinct graphitic schist units observed in the drill core. This cut-off is also consistent with industry norms for khondalite- and gneiss-hosted flake graphite deposits in similar metamorphic terranes. The selected cut-off provides continuous, geologically coherent zones suitable for modelling, while avoiding inclusion of low-grade material that would dilute the resource interpretation.

Figure 4.1 Histogram of unrestricted TGC grade distribution

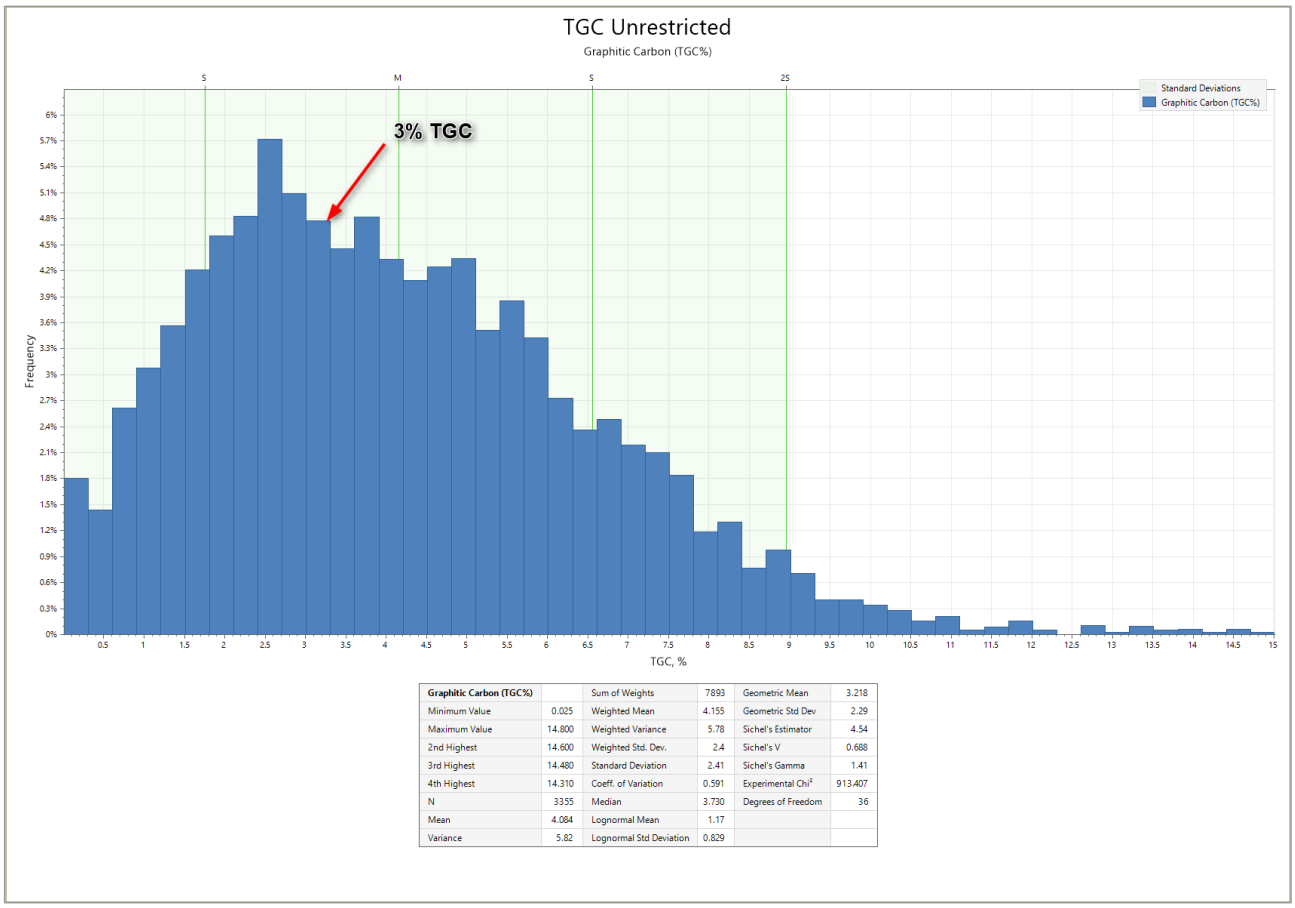

Graphitic Carbon (TGC%)		Sum of Weights	7893	Geometric Mean	3.218
Minimum Value	0.025	Weighted Mean	4.155	Geometric Std Dev	2.29
Maximum Value	14.800	Weighted Variance	5.78	Sichel's Estimator	4.54
2nd Highest	14.600	Weighted Std. Dev.	2.4	Sichel's V	0.688
3rd Highest	14.480	Standard Deviation	2.41	Sichel's Gamma	1.41
4th Highest	14.310	Coeff. of Variation	0.591	Experimental Chi²	913.407
N	3355	Median	3.730	Degrees of Freedom	36
Mean	4.084	Lognormal Mean	1.17		
Variance	5.82	Lognormal Std Deviation	0.829		

4.2.3 Mineralisation

Interpretation of mineralisation is one of the most important stages of the resource modelling process, because the interpreted boundaries control both model volume/tonnage and selected grades.

The diamond drilling data was used to develop an interpretation of the Tanga deposit. Wireframes of the mineralisation envelopes were developed based on the section interpretation and the extent of the interpretation was adjusted by using a geological map in a plan view.

The interpretation of graphite mineralised bodies was based on 3% TGC cut-off grade.

The deposit was interpreted on 24 section views. The grade composites were generated using the following parameters:

- Threshold grade: 3% TGC
- Minimum composite length: 2 m
- Minimum grades of final composite: 3% TGC
- Maximum total length of waste: not limited
- Maximum consecutive length of waste: 4 m
- Maximum gap between samples: 4 m
- Minimum grade x length for short intervals: 6% TGC x m.

Interpretation was carried out by initially creating strings. The orientation of the geological structures was considered during the interpretation. All strings were saved separately for each cross section. The geological map and sections were utilised to confirm the orientation of the mineralisation. Examples of an interpreted section are shown in Figure 4.2 and Figure 4.3.

The following approach was applied during interpretation:

- Each section view was displayed on screen with a clipping window equal to half the distance from the adjacent sections.
- All interpreted strings were snapped to drillholes, or to trench sampling channels (i.e. the interpretation was constrained in the third dimension).
- Internal waste within the mineralised envelopes was generally not interpreted and modelled where separation was not warranted.
- The interpretation was extended perpendicular to the first and last interpreted section a distance equal to half the distance between the adjacent drillhole sections. Consideration was given to the general direction of the structure.
- If a mineralised envelope did not extend to the adjacent section, it was projected halfway to the next section and then terminated. The general shape of the envelope was maintained.
- If a mineralised envelope did not extend to the next section within the interpreted profile or plan, it was extrapolated halfway to the next section, maintaining its thickness, and terminated. The general shape of the envelope was maintained.
- If a mineralised envelope extended to surface, it was extended above the topographic DTM. This was completed to make sure there would be no gaps between the block model and the topographic base when the block model was built.
- When intermediate sections were interpreted, the wireframe was initially created between the main cross sections and then sliced at the intermediate section. The wireframe slice was then used to interpret the middle sections.

Figure 4.2 Example of interpretation of mineralisation (looking north)


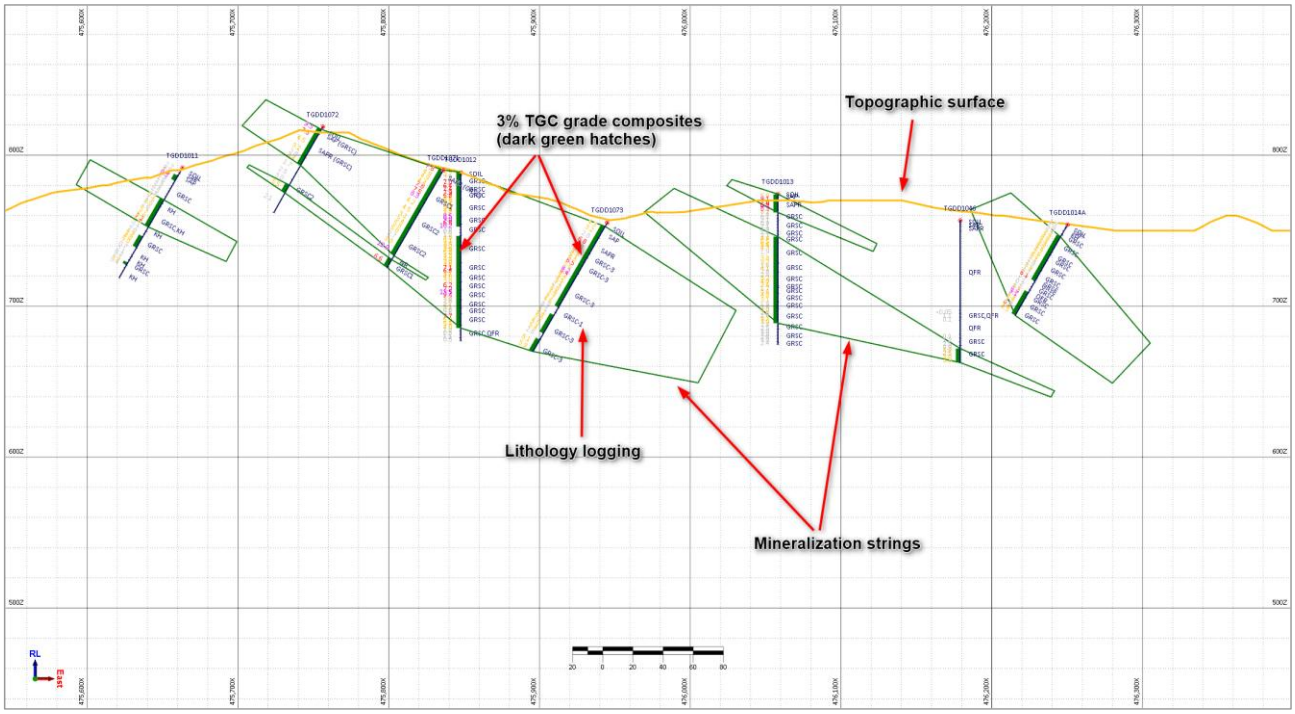


Figure 4.3 Example of interpretation of mineralisation compared against geological section (looking north)

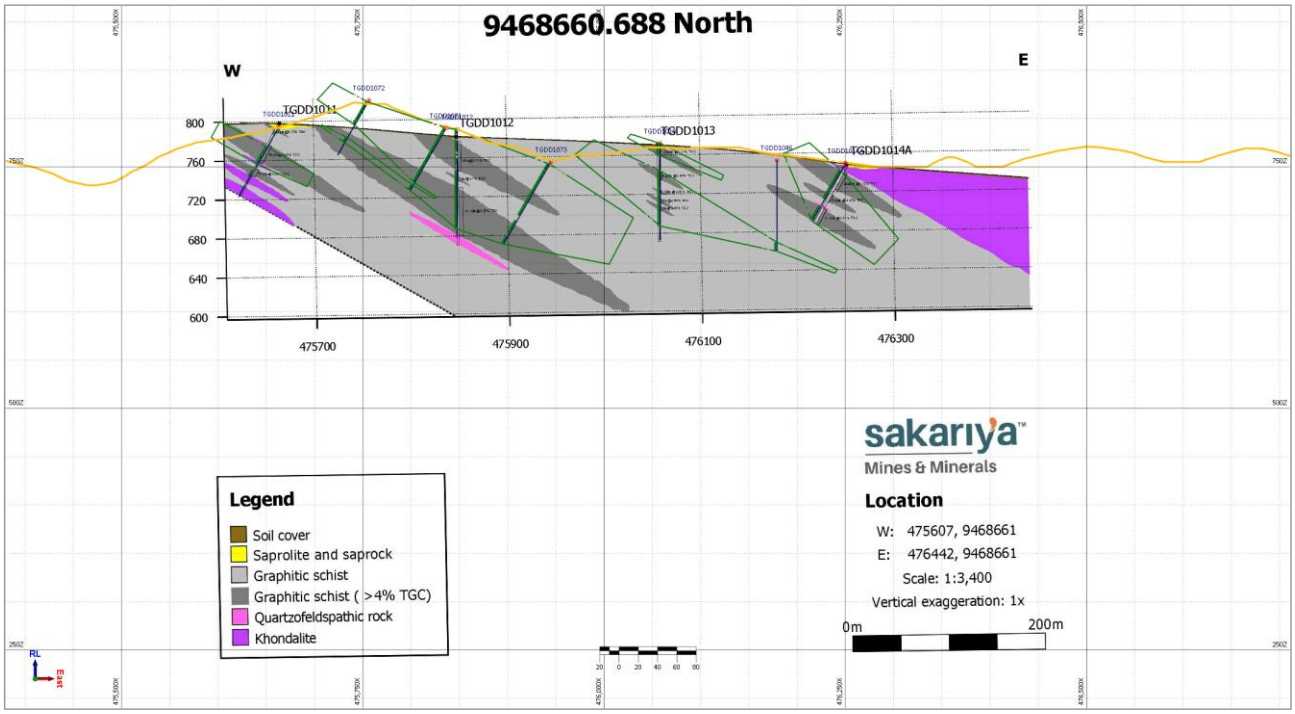


The interpretation strings were used to generate 3D models. Each wireframe has a unique name. An example of the wireframe constructed is shown in Figure 4.4. Working in a 3D environment ensured accurate modelling of the mineralised zones. Table 4.3 shows volumes of the wireframe models.

Table 4.3 Statistics for the wireframe models (not clipped by topography surface) of the Tanga deposit

Mineralisation	Volume (m^3)
Graphite mineralised envelopes (28 individual mineralised bodies)	97,140,230

Each wireframe model was assigned with a unique name so that it was possible to carry out the subsequent grade interpolation individually for each modelled mineralised body.

Figure 4.4 Constructed wireframe models (3D view)

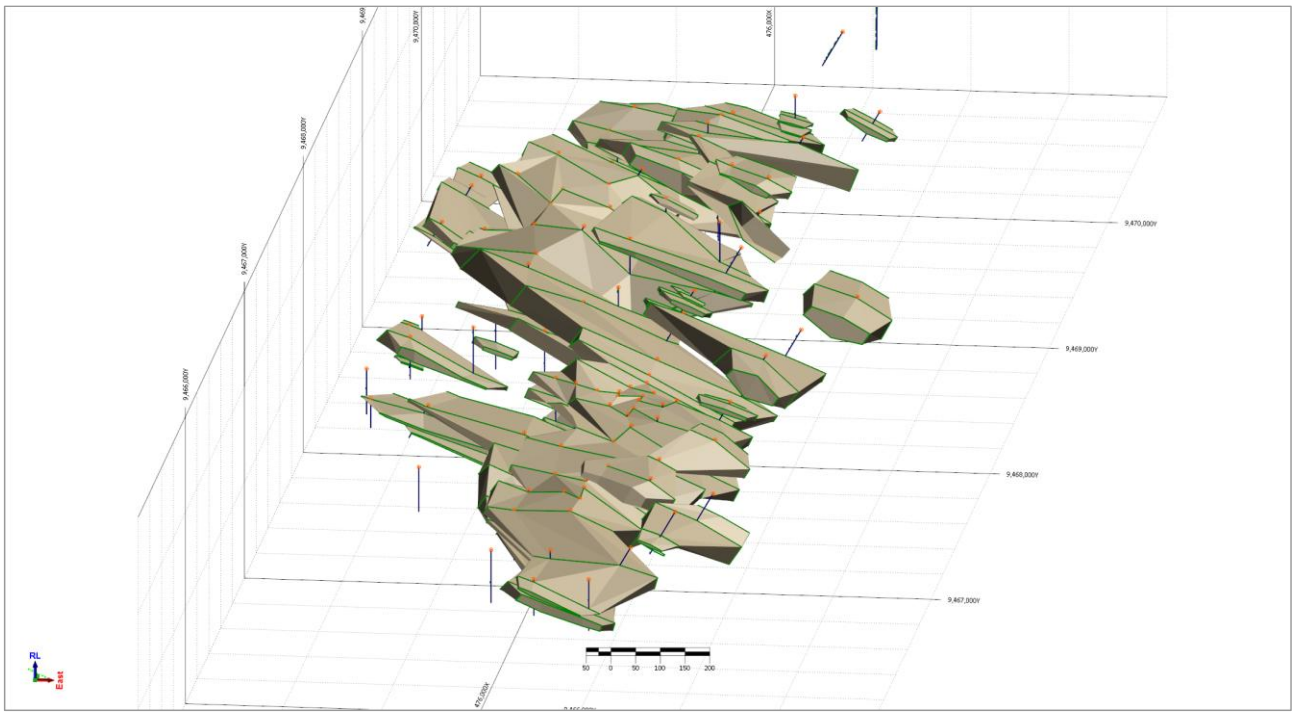

4.3 Weathering

A weathering profile was developed for the project based on systematic geological logging and verification against core photographs. Variations in weathering intensity were readily observed in drill core, ranging from strongly oxidised clay-rich material near surface to progressively less weathered graphitic schist at depth. Using these visual criteria, interpretation strings were constructed to delineate the base of oxidation, transition zone, and fresh rock boundary across the drillhole dataset. The resulting weathering domains were incorporated primarily for the purposes of density assignment and understanding metallurgical behaviour, as weathering can affect rock mass characteristics, moisture content, and graphite liberation properties. Importantly, review of the assay data confirmed that weathering intensity does not materially influence the distribution of TGC grades, and therefore the weathering surfaces were not used to control grade interpolation. The weathering model nevertheless provides a valuable framework for resource reporting, mining studies, and metallurgical planning.


4.4 Drillhole data coding and length compositing

Drillhole coding is a standard procedure which ensures the correct samples are used in classical statistical and geostatistical analyses and grade interpolation. For this purpose, solid wireframes for each mineralised envelope were used to select samples. Samples were then selected for individual mineralised envelopes and flagged for each mineralisation zone and geological domain.

Assays were coded based on the weathering surfaces modelled from the DTMs. Intervals above the base of oxidation were coded as 1 (Weathered), those below the base of oxidation but above the top-of-fresh surface were coded as 2 (Transition), and all intervals below the top-of-fresh surface were coded as 3 (Fresh).

Based on the coding, samples from within the resource wireframes were used to conduct a sample length analysis. Most raw sample intervals are 2 m in length as shown in Figure 4.5.

Figure 4.5 Histogram of sample length distribution

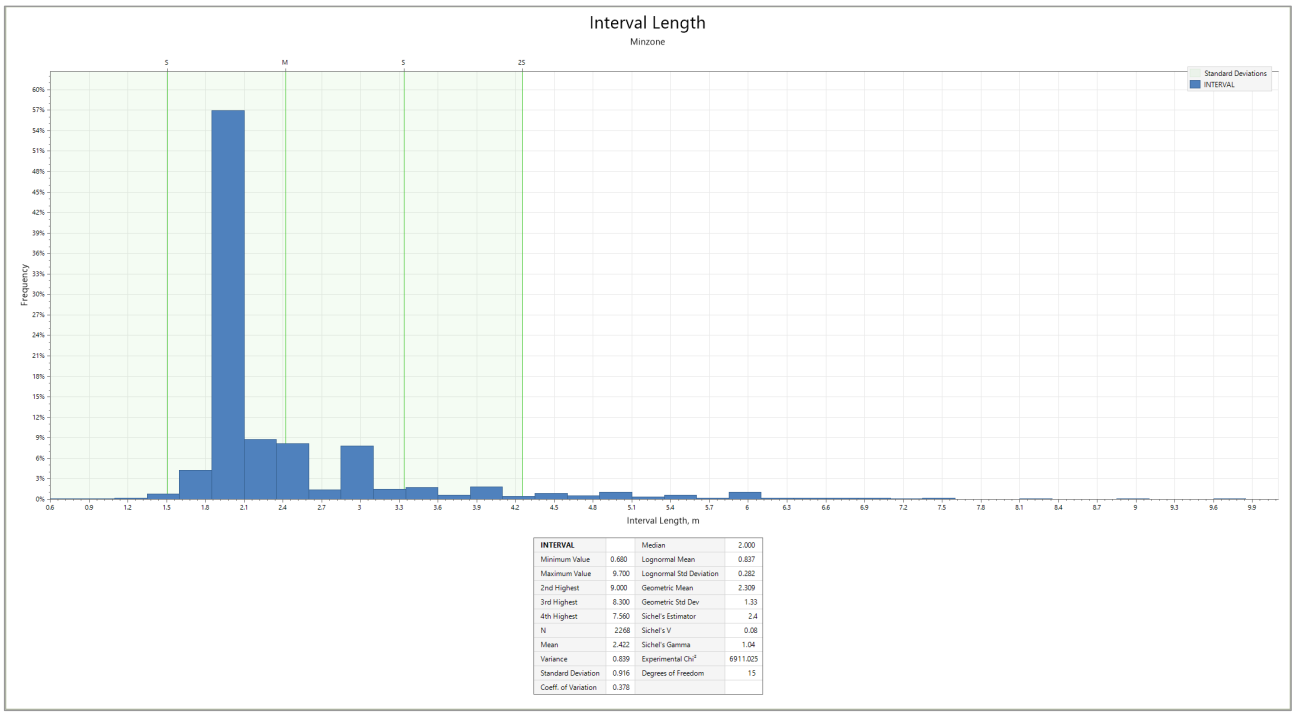

Based on the review, a 2 m composite length was selected. The composite intervals were created separately for each type of mineralisation. The composite intervals were also generated using the samples within the corresponding model only. Compositing was stopped and restarted at all boundaries between mineralised envelopes and waste material, as well between different oxidation zones. If a gap of less than 20 cm occurred between contiguous samples, it was included in the sample composite. If the gap was longer than 20 cm, the composite was stopped, and another composite was started from the next sample.

Compositing was stopped and restarted at all boundaries between mineralised envelopes and waste material, as well as between different weathering zones.

4.5 Statistical analysis


Once the mineralisation had been interpreted and wireframed, classical statistical analysis was repeated, but only for the samples that were within the mineralised envelopes. This was carried out to meet the following objectives:

- To estimate the mixing effect of grade populations for each element within each zone.
- To estimate the necessity for separation of grade populations if more than one population is determined.
- To define the top-cut grades for each modelled domain.

Samples were coded separately for each mineralisation zone. Visual validation was then performed to check sample coding. Histograms and probability plots were then analysed to determine top cut grade values. Statistical analysis was performed for TGC.

The distribution of TGC grades was close to lognormal. This supports the selected grade threshold for the mineralisation and illustrates that this distinction is the primary cause of the bimodal distribution in the combined database.

Figure 4.6 Histogram for TGC values within mineralisation

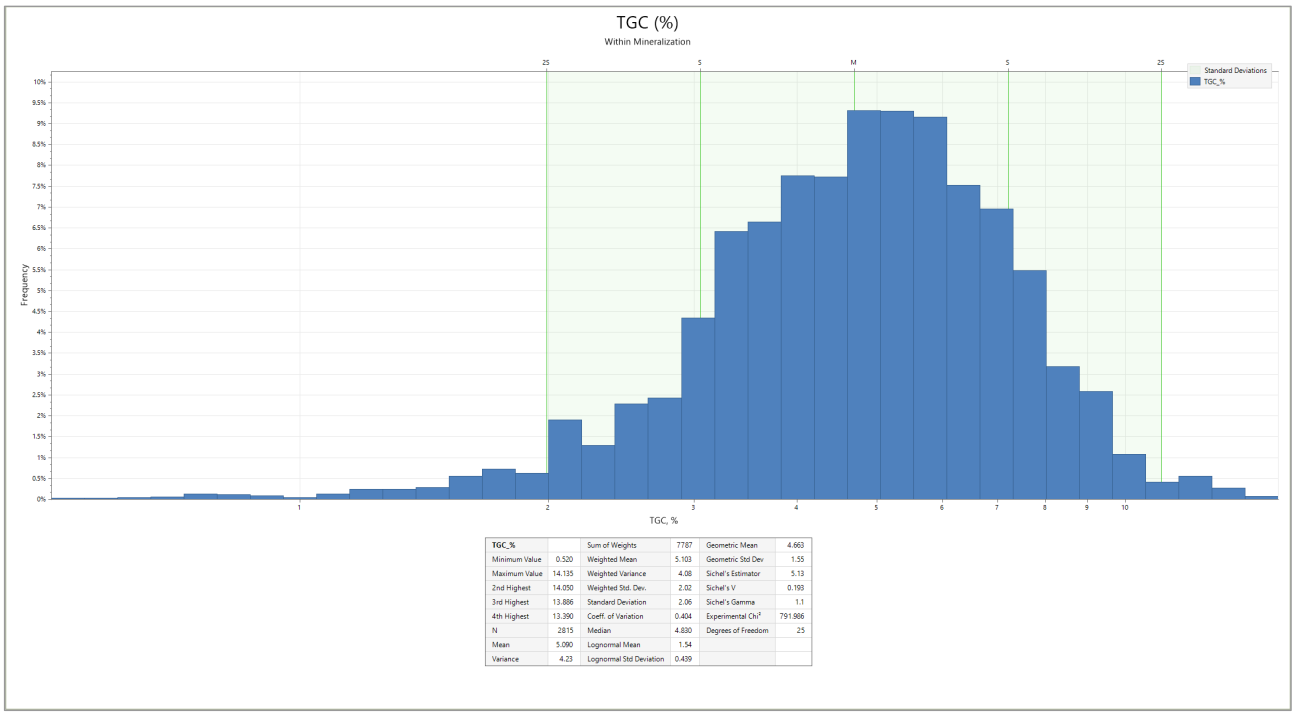

4.5.1 Summary statistics – raw data

The statistical parameters for main modelled elements are shown in Table 4.4 and Table 4.5.

Table 4.4 Classical statistics for TGC (weighted on sample length)

Element	Number of Samples	Minimum (%TGC)	Maximum (%TGC)	Mean (%TGC)	Variance	Std. Dev.	Coeff. of Variation	Median (%TGC)
Unrestricted assays								
TGC	3,355	0.025	14.80	4.16	5.78	2.40	0.59	3.73

4.5.2 Summary statistics – composite data

Table 4.5 Classical statistics for TGC within mineralisation (weighted on sample length)

Element	Number of Samples	Minimum (%TGC)	Maximum (%TGC)	Mean (%TGC)	Variance	Std. Dev.	Coeff. of Variation	Median (%TGC)
Assays within mineralisation								
TGC	2,268	0.025	14.80	5.08	4.82	2.20	0.44	4.81
Assay composites within mineralisation								
TGC	2,822	0.025	14.14	5.09	4.12	2.03	0.41	4.83


4.5.3 High-grade cutting

A review of grade outliers was undertaken to ensure that extreme grades are treated appropriately during grade interpolation. Although extreme grade outliers within the grade populations of variables are real, they are potentially not representative of the volume they inform during estimation. If these values are not cut, they have the potential to result in significant grade over-estimation on a local basis.

All composited drillhole data within the interpreted graphite mineralisation envelope was selected to determine if top-cuts were required. Various charts, and coefficient of variation (COV) values were

reviewed, with the aim of determining if there were any very high-grade composites that had the potential to bias block model estimates. The COV value for TGC is 0.404. The COV is a measure of skewness, and high values (greater than 1.5 or so) may suggest cutting is required. The histograms were then used to identify the point at which the high-grade tail disintegrates (Figure 4.7).

Figure 4.7 Histogram for TGC values within mineralisation - top-cut

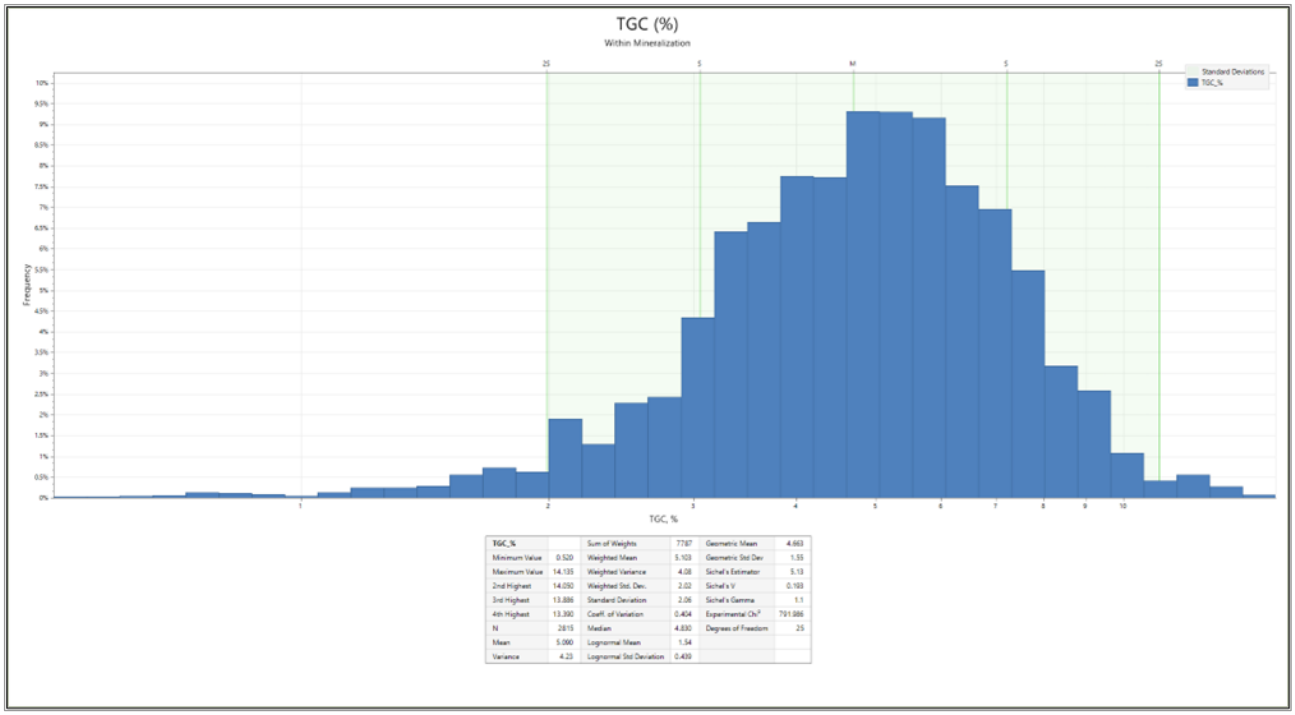


Following a review of the histogram and primarily based on the low coefficient of variation (COV), no top cuts were applied to the TGC values.

4.6 Bulk densities


Bulk density values were assigned according to the three weathering domains defined in the geological model—oxide, transition, and fresh rock. Bulk density measurements were analysed by weathering state, and separate histograms were generated for each domain to assess the distribution and central tendency of the data. The histograms showed well-defined populations with limited scatter, supporting the use of average values for domaining purposes. The mean bulk density for the oxide zone was 1.95 t/m^3 (Figure 4.8), reflecting the higher degree of weathering and porosity near surface. The transition zone showed an intermediate mean density of 2.33 t/m^3 (Figure 4.9), consistent with partial preservation of primary rock fabric. The fresh rock domain exhibited the highest mean density at 2.72 t/m^3 (Figure 4.10), corresponding to the competent, unweathered graphitic schist. These mean values were therefore adopted for the respective weathering domains in the Mineral Resource estimation.

Figure 4.8 Histogram for bulk density values within oxide domain

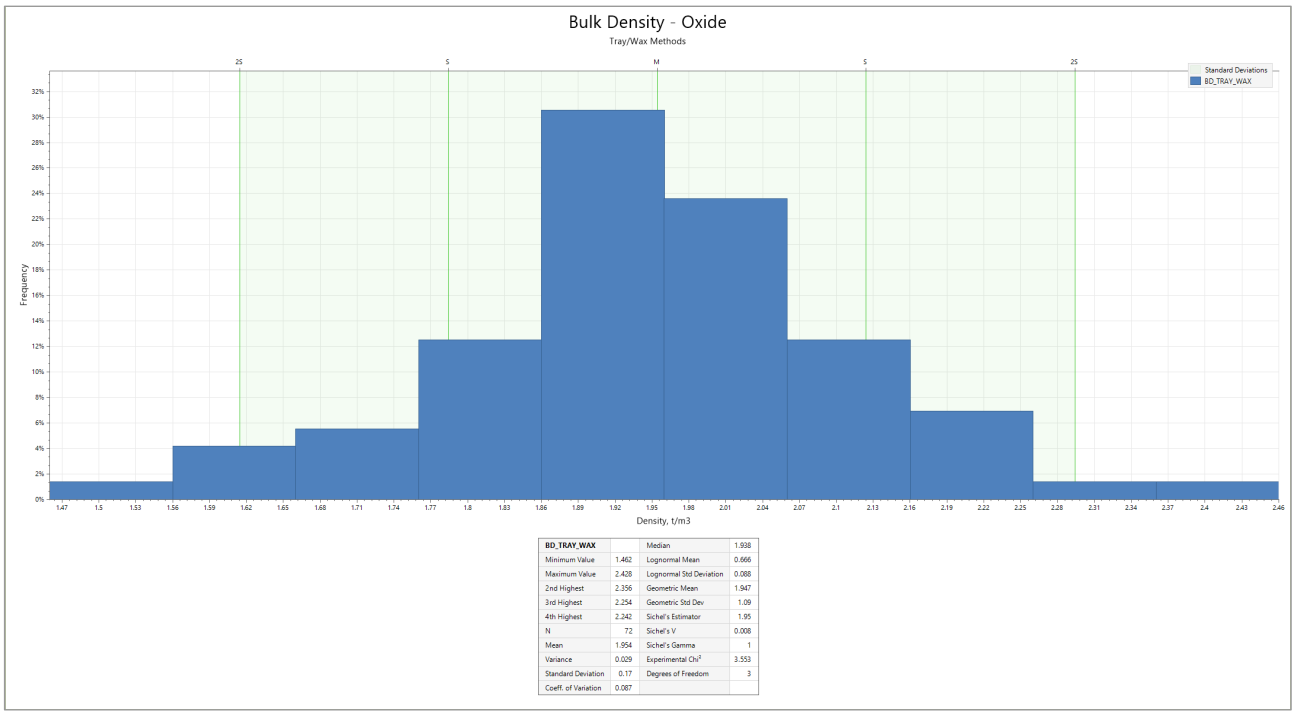


BD_TRAY_WAX		Median	1.938
Minimum Value	1.462	Lognormal Mean	0.666
Maximum Value	2.428	Lognormal Std Deviation	0.088
2nd Highest	2.356	Geometric Mean	1.947
3rd Highest	2.254	Geometric Std Dev	1.09
4th Highest	2.242	Sichel's Estimator	1.95
N	72	Sichel's V	0.008
Mean	1.954	Sichel's Gamma	1
Variance	0.029	Experimental Chi²	3.553
Standard Deviation	0.17	Degrees of Freedom	3
Coeff. of Variation	0.087		

Figure 4.9 Histogram for bulk density values within transition domain

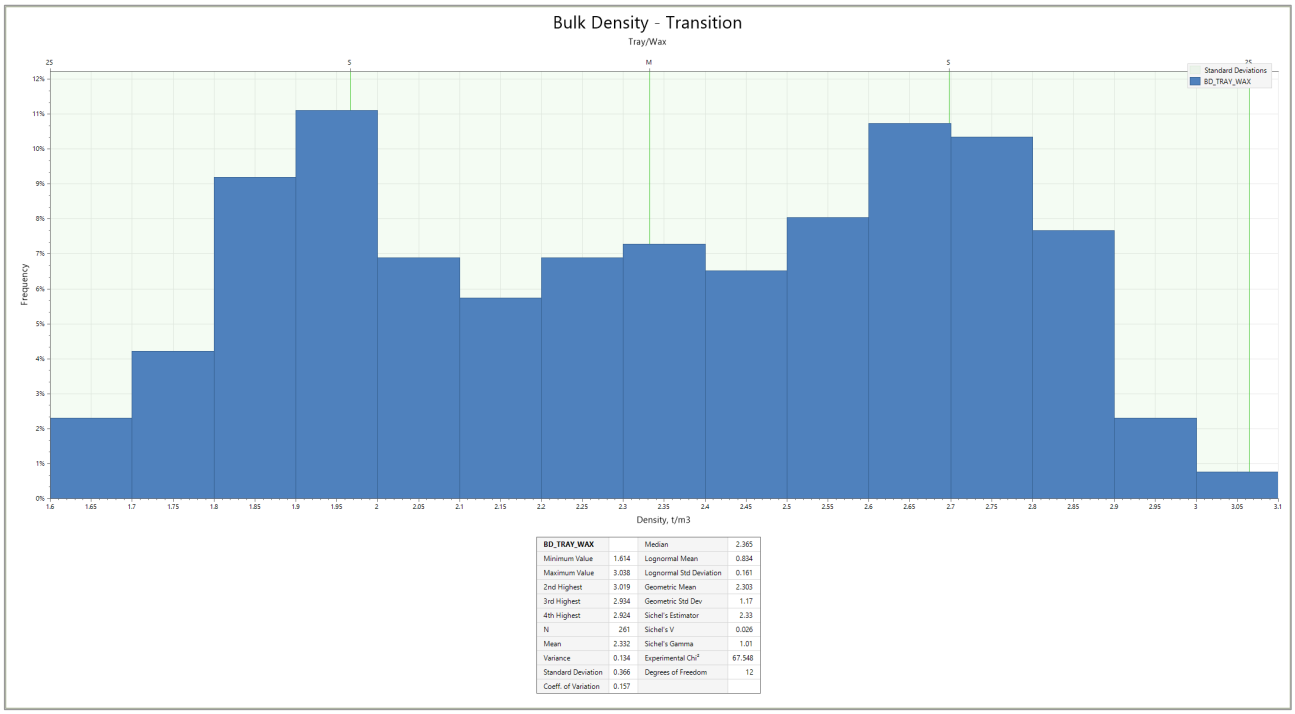

BD_TRAY_WAX		Median	2.365
Minimum Value	1.614	Lognormal Mean	0.834
Maximum Value	3.038	Lognormal Std Deviation	0.161
2nd Highest	3.019	Geometric Mean	2.303
3rd Highest	2.934	Geometric Std Dev	1.17
4th Highest	2.924	Sichel's Estimator	2.33
N	261	Sichel's V	0.026
Mean	2.332	Sichel's Gamma	1.01
Variance	0.134	Experimental Chi²	67.548
Standard Deviation	0.366	Degrees of Freedom	12
Coeff. of Variation	0.157		

Figure 4.10 Histogram for bulk density values within fresh domain

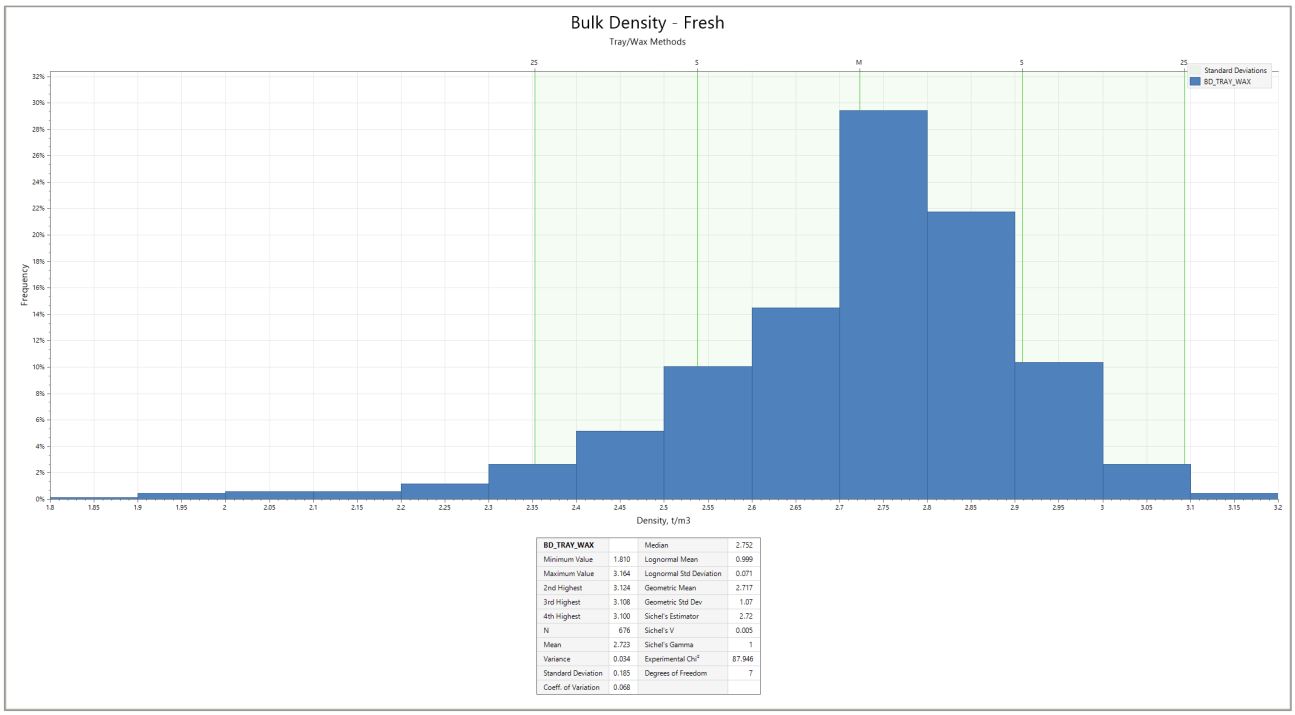

4.7 Variography

The purpose of geostatistical analysis is to generate a series of semivariograms (variograms) that can be used as the input weighting mechanism for kriging algorithms. The variogram ranges determined from this analysis contribute heavily to the determination of the search neighbourhood dimensions. Therefore, geostatistical analysis was conducted to meet the following objectives:

- To estimate the presence of directional anisotropy of mineralisation. This can be estimated by studying the directional variograms. There is a directional anisotropy if variograms reach the total sill at different distances in different directions.
- To estimate the spatial continuity in the main directions of anisotropy. The continuity grades can be estimated using the variogram ranges, i.e. the distance at which the variogram reaches the total sill (plateau). Accordingly, grades cannot be estimated reliably if the search radius for grade interpolation is greater than the variogram range. When the variogram reaches the sill, there is no correlation between the pairs of samples at that sample separation distance.
- To obtain the variogram parameters (nugget effect, total sill, and ranges) to be input into the interpolation process.

All variograms were calculated and modelled for the composited sample file without applied top-cut grades (TGC) and constrained by the corresponding mineralised envelopes.

Downhole experimental variograms were modelled to estimate the nugget effect before the modelling of the directional variograms. Directions of the axes for the directional variograms were selected based on geological parameters of the defined structural zones; therefore, the main direction of the variogram models were selected to be 0° with dip and plunge angles set to 0° and 30° respectively.


All experimental variograms were modelled with one structure, and all modelled variograms were exponential. The parameters of the modelled variograms are listed in Table 4.6 and shown in Figure 4.11.

The obtained variogram parameters were used in the grade interpolation process, which is described in Section 4.9 of the report.

Table 4.6 Semivariograms parameters

Element	Type	Axis	Azimuth	Dip	Nugget	Partial Sill	Range (m)
	Correlogram	Downhole			0.12	0.72	12
TGC	Correlogram exponential	Major	0	0	0.10	0.091	250
		Semi-major	90	30			200
		Minor	270	60			20

Figure 4.11 Tanga downhole and directional variogram models for TGC grades of the mineralised zones

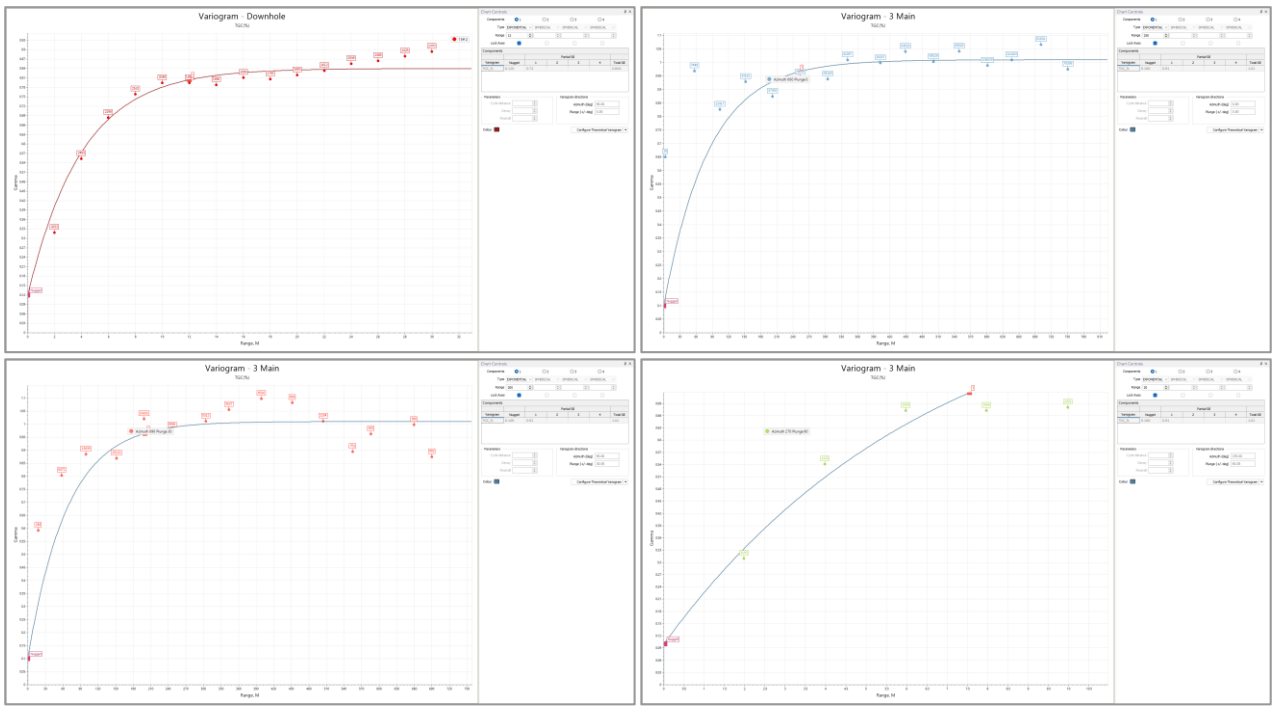

4.8 Volume modelling/block model development

Block modelling was undertaken by AMC using Micromine 2025.

4.8.1 Model construction and parameters

Block modelling included several stages. Firstly, an empty block model was created within the closed wireframe models for the mineralised envelopes interpreted and modelled using a 3% TGC cut-off grade. The block model was then restricted with the surface DTMs, i.e. all model cells above the surfaces were deleted from the model file and then coded by the weathering state.

The block model dimensions and parameters are shown in Table 4.7 and the block model attributes are shown in Table 4.8.

Table 4.7 Block model dimensions and parameters.

Axis	Extent (Centroid)		Block size (m)	Maximum sub-celling (m)
	Minimum	Maximum		
East	475,590	476,590	25	5
North	9,465,630	9,469,655	25	5
RL	590	820	10	2

Initial filling with parent cell size was followed by sub-celling where necessary. The sub-celling occurred near the boundaries of the mineralised bodies or where models were truncated with the DTMs of the topographic surface and/or weathering zones. The parent cell size was chosen based on the general morphology of mineralised bodies and to manage the number of blocks in the model. The sub-celling size was chosen to maintain the resolution of the mineralised bodies. The sub-cells were optimised in the models where possible to form larger cells.

Coding of the block model was based on the separate wireframe models for deposit.

Table 4.8 Block model attributes and field names

Field	Description
X	Easting, m
Y	Northing, m
Z	RL
_X	Easting block size, m
_Y	Northing block size, m
_Z	RL block size, m
DENSITY	Density values, t/m^3
ORE	0 – Waste; 1 – Mineralisation
OXIDE	1 – Oxide; 2 – Transition; 3 - Fresh
TGC_%	Total graphitic carbon in %
CLASS	Classification value: 2 – Indicated; 3 - Inferred

4.9 Grade estimation

TGC grades were interpolated into the block models using the ordinary kriging (OK) method.

The OK interpolation process was performed at different search radii until all cells were interpolated. The radii of the search ellipsoid and the orientation of axes were selected based on geostatistical analysis and geological orientation. The first search radius was selected to be equal to two thirds of the variogram long ranges in all directions and the second search radius was selected to be equal to the full range of the variogram long ranges in all directions. The model cells that did not receive grades from the first two runs were then estimated using radii incremented by the full long variogram ranges. When model cells were estimated using radii not exceeding two full variogram ranges, a restriction of at least three samples from at least two drillholes was applied to increase the reliability of the estimates. The interpolation strategy is presented in Table 4.9.

Table 4.9 Interpolation parameters

Interpolation Method	Ordinary Kriging		
Search Radii	Less than or equal to two-thirds of semivariogram ranges	Less or equal to one semivariogram ranges	Less or equal to two semivariogram ranges
Minimum no. of samples	3	3	3
Maximum no. of samples	20	20	20
Minimum no. of drillholes	2	2	1


The block models and sample composites were coded for each mineralised zone. Each zone was estimated separately using corresponding composites. Hard boundaries between all lodes were employed. A “parent block estimation” technique was used (i.e. all subcells within a parent cell received the same grades).

Declustering was performed during the interpolation process by using four sectors within the search neighbourhood. Each sector was restricted to a maximum of five points. The maximum combined number of samples allowable for the interpolation was therefore 20. Model cells were discretised using 5-points by 5-points by 5-points for kriged estimates. The block estimates are simple averages of the point estimates.

Due to the local variability of morphology of the mineralisation, it was decided that a dynamic search would deliver most robust results for the deposit. To set up the dynamic search, it was necessary to assign azimuth, plunge and dip values to each cell in the block model. That was achieved using the following methodology:

1 Strike was set to a constant direction of 0°.
2 Plunge for the mineralisation strike was set to a constant 0° dip.
3 A set of strings were digitised for 80 cross sections perpendicular to the deposit strike for the interpreted mineralised envelopes. All strings were digitised on the roof and floor of each mineralised lens. These strings (Figure 4.12) represented general dip for each modelled lens.
4 When all strings for dip were digitised, they were “normalised”, i.e. points were inserted in such a way that the distance between points along strings would not be greater than 2 m.
5 Inclination for each pair of points along strings was calculated and recorded in the string file which was digitised for the lenses strike and dip.
6 All calculated values for strings were checked to have correct positive or negative values and corrected if it was necessary.
7 The resultant strings were used to interpolate dip values into each cell of the block model. Spherical search was employed for this process.

Figure 4.12 Strings for dip

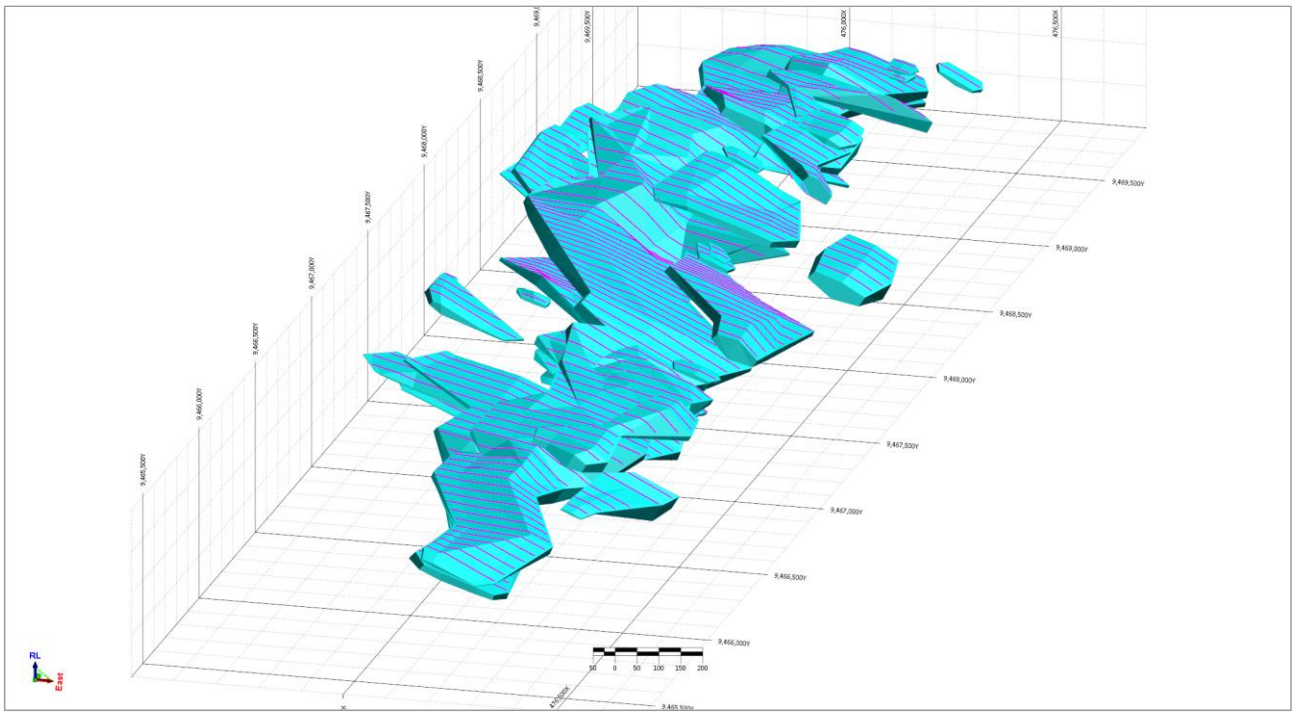

The resultant block model had assigned azimuth, dip and plunge values for each model cell, which represented the general directions of mineralised lenses, which were subsequently used for orientation of the search ellipse when grades were interpolated into each model cell.

4.10 Model validation

Validation of the grade estimates was completed by:

- Visual checks on screen in sectional view to ensure that block model grades honour the general grade tenor of downhole composites.
- Comparison of the block model and composite mean grades (Table 4.10).
- Comparison of the block model volume with the combined wireframe volume (Table 4.11).
- Generation of swath plots to compare input and output grades in a semi-local sense, by easting, northing and elevation.

Visual validation of block grades against input grades confirmed that the block grades reflect the grade tenor of the input composites (Figure 4.13).

Figure 4.13 Visual validation of block model grades vs drillhole grades

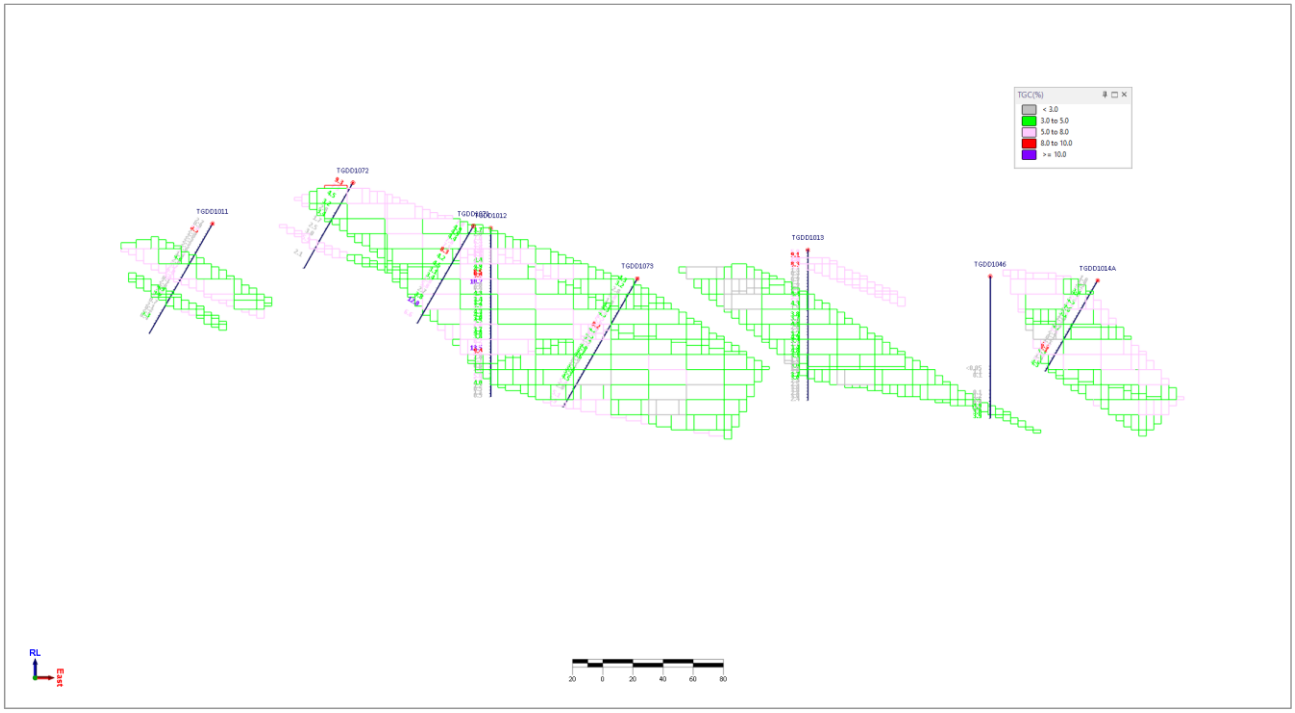


Table 4.10 Comparison of TGC grades between block model and composites

Block model (%TGC)	Composites (%TGC)
4.84	5.09

Table 4.11 Comparison of wireframe volume and block model volume

Wireframe ('000,000 m^3)	Block model ('000,000 m^3)
97.1	89.7

Note: Reported volumes correspond to untrimmed wireframe envelopes; no adjustments for topographic surface intersection have been applied.

Swath plots were generated for composites and block model grades. They show that the distribution of block grades honours the distribution of input composite grades. There is a degree of smoothing evident, which is to be expected from the estimation method used, whereby block grades overstate on the lower grade ranges and understate on the higher-grade ranges. Smoothing is particularly evident in areas of wide spaced drilling where the number of composites was relatively low. However, the general trend in the composites is reflected in the block model.

Figure 4.14 Swath plot by easting

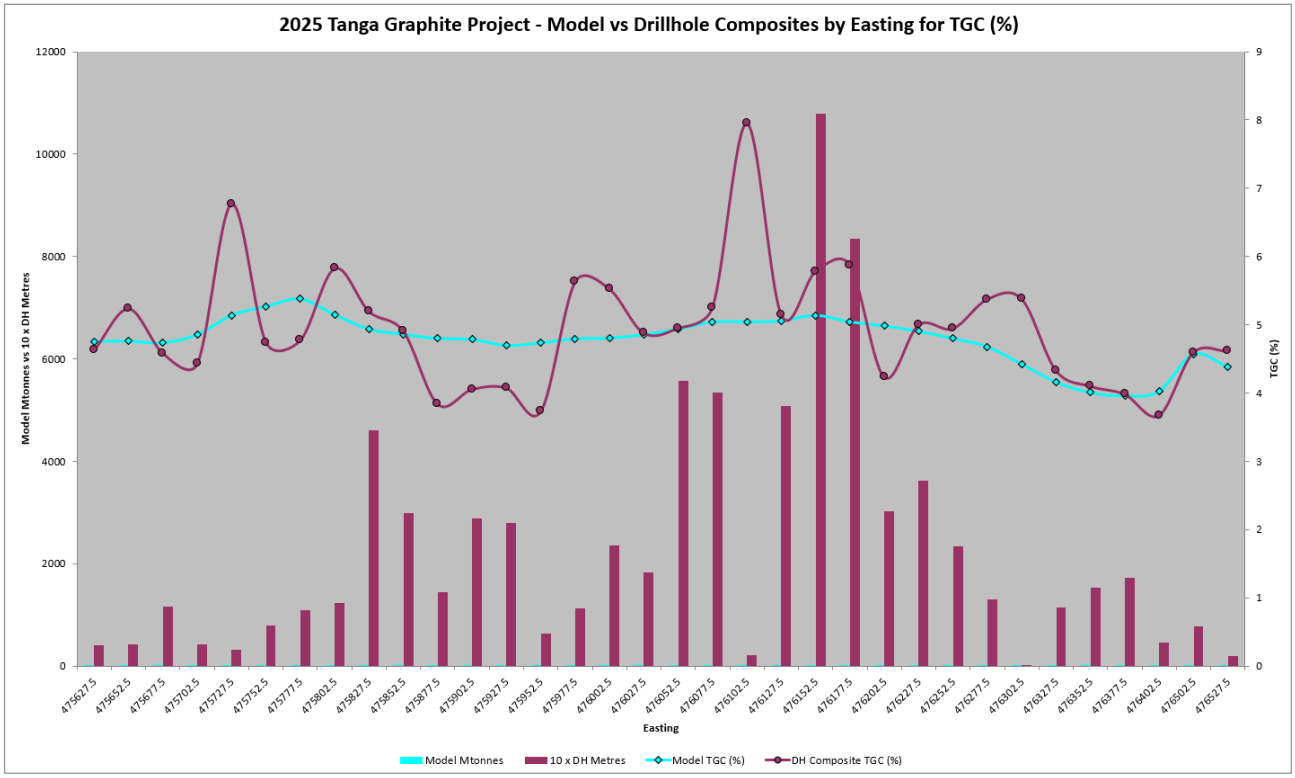


Figure 4.15 Swath plot by northing (Central zone)


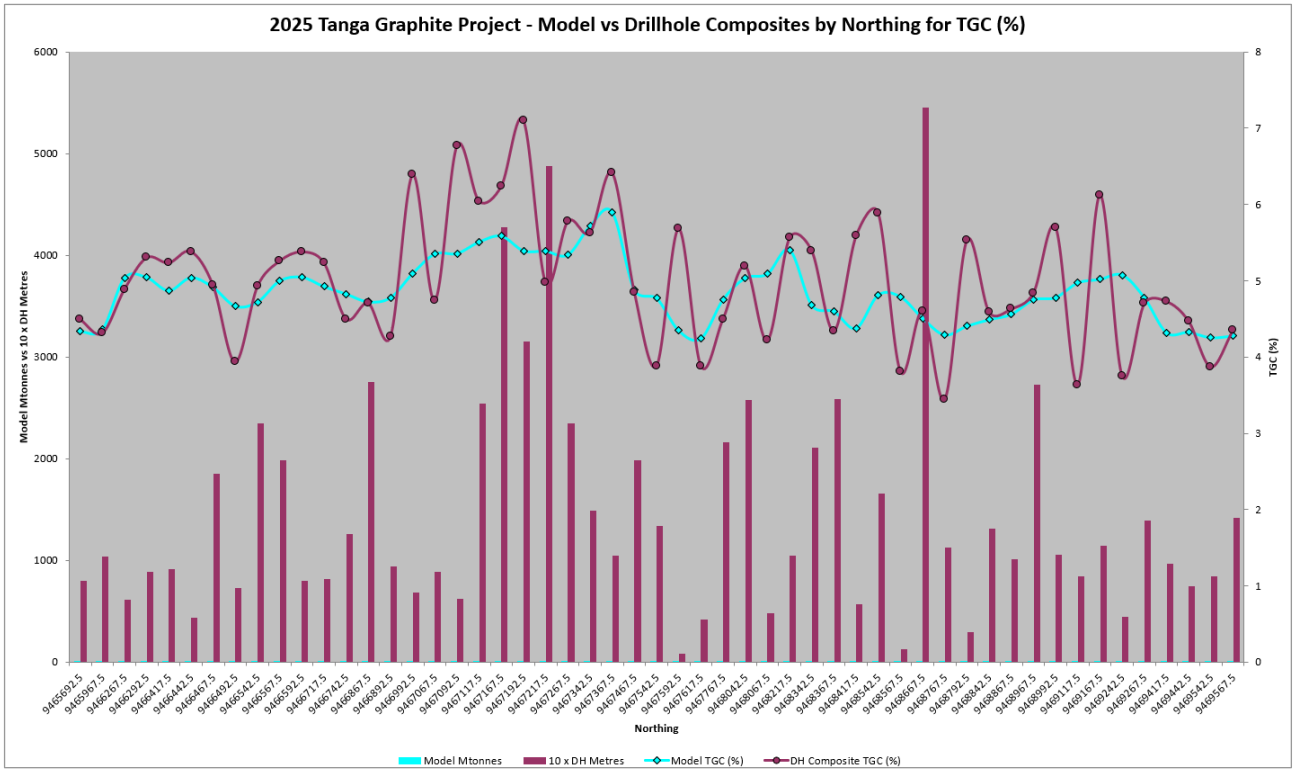


Figure 4.16 Swath plot by 25 m bench (Central zone)

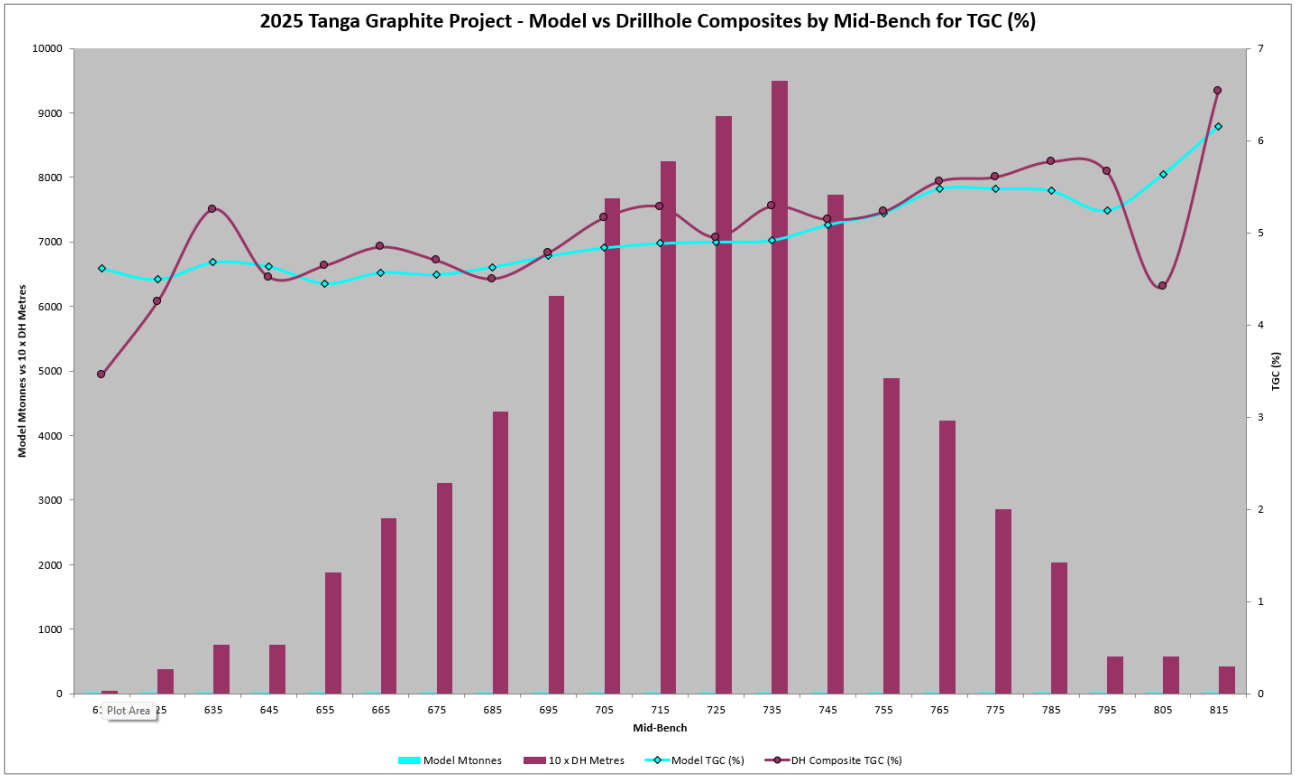

4.11 JORC Code Clause 49 criteria and Mineral Resource classification

4.11.1 Introduction

Mineral Resource tonnes and TGC are key metrics for assessing flake graphite projects; however, attributes such as product flake size and purity should to be evaluated to allow consideration of potential product specifications (Scogings, 2014, Scogings et al., 2015). This is because flake size distribution and carbon content are fundamental parameters that conventionally drive the value in a graphite project, with the larger and purer flakes >150 µm typically being more valuable. However, it is noted that a range of flake sizes is preferable to supply several markets, especially as flakes smaller than 150 micron (100 mesh) are typically used to produce spherical graphite.

Flake graphite has historically been defined primarily according to size distribution, with terms such as small, medium and large used in the marketplace (Table 4.12); refer also to Scogings et al. (2015).

Table 4.12 Examples of graphite flake size and some typical market terminology

Sizing	Market Terminology
>300 µm (+48 Mesh)	Extra-Large or 'Jumbo' Flake
>180 µm (-48 to +80 Mesh)	Large Flake
>150 µm (-80 to +100 Mesh)	Medium Flake
>75 µm (-100 to +200 Mesh)	Small Flake
<75 µm (-200 Mesh) 80-85%C	Fine Flake

Note: 1 mm = 1000 microns (µm)

Clause 49 of the JORC Code (2012) requires that minerals such as graphite that are produced and sold according to product specifications be reported "in terms of the mineral or minerals on which the project is to be based and must include the specification of those minerals".

Clause 49 also states that "It may be necessary, prior to the reporting of a Mineral Resource or Ore Reserve, to take particular account of certain key characteristics or qualities such as likely product specifications, proximity to markets and general product marketability."

Flake graphite deposits may be evaluated in terms of product specifications and marketability using some of the following tests:

- Mineralogical examination using polished thin sections, mineral liberation analysis, XRD, or graphite content by size analyses of crushed rock.
- Comminution and flotation to produce a graphite concentrate.
- Determination of particle size distribution and carbon content of each sieve fraction of the concentrate.
- Market performance tests include bulk density, thermal stability, expandability, crystallinity, chemical purity, and spherical graphite performance for battery anodes.

AMC notes that metallurgical (process) test methods can have a significant effect on the quality of concentrate (product) produced at a laboratory scale. Therefore, it is cautioned that laboratory process test results used to report Mineral Resources for natural graphite may not reflect either the process flowsheet adopted after completion of technical studies, the layout of the final process plant, or final product quality.

4.11.2 Tanga lithologies and mineralogy

A total of 76 thin and polished section from 16 holes distributed acorss the project (Figure 4.22) were examined using petrographic microscopy in transmitted and reflected light. Sample depths and drill collar details are presented in Table 4.13; thin section examples are presented as Figure 4.23 to Figure 4.28.

The majority of mineralised samples are graphitic quartz mica feldspar schists. Twenty three samples are indicated to be of pelitic origin and contain minerals such as sillimanite (the predominant aluminous mineral at the deposit), kyanite (five samples), staurolite (two samples) or cordierite (two samples). Other minerals noted inlcude calcite, clays, pyroxene, pyrite, garnet and tourmaline.

The primary mineral assemblages indicate upper amphibolite to granulite grade metamorphism, overprinted by weathering of feldspars and oxidation of sulfide minerals to form brown ferruginous clays near surface (Figure 4.17). Thin section examination highlighted that oxidation of sulfides and formation of ferruginous clays resulted in graphite flakes being split, which may affect final product quality (Figure 4.18).

Intense kaolinisation accompanied by enrichment in pyrite was noted in inclined hole TGDD1029 to ~80 m down-hole depth (Figure 4.17). Similar intense 'white' kaolinisation was noted in other holes near TGDD1029, and along strike further to the north and south during logging by site geologists and later during drill core photo review by AMC (see Figure 4.22 for collar locations of holes provisionally classified as kaolinised). The genesis of this white kaolinistion is unknown, but AMC recommends that further studies should be undertaken to verify spatial distribution and evaluate any relationship with graphite flake size and purity.

Figure 4.17 TGDD 1029 showing brown oxidation underlain by white kaolinised graphite mineralisation from about 20m down-hole depth



Note: Yellow staining due to oxidation of pyrite after core cutting

Figure 4.18 Quartz feldspar and ferruginous clay with split graphite. No sulfides observed. Hole TGDD1016, thin section TGF214

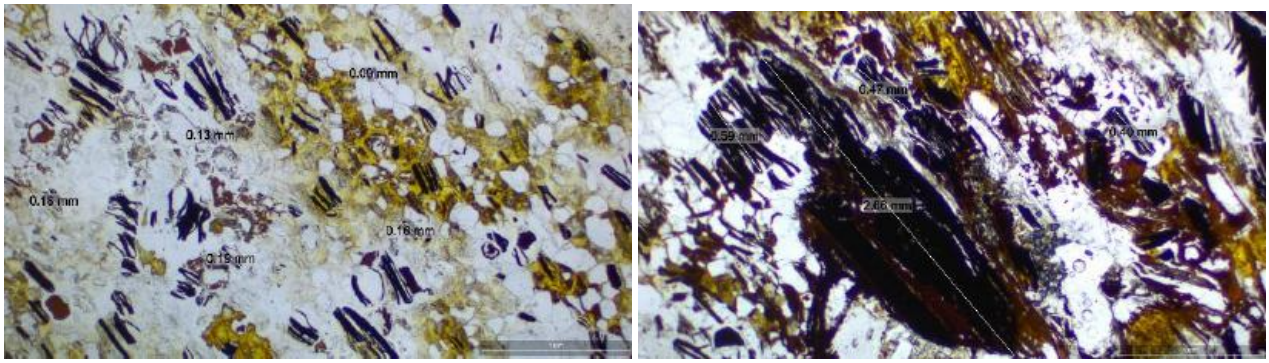


Figure 4.19 Brown oxidised graphite schist, thin section TGF214



4.11.3 Weathering

The graphitic and waste rocks are weathered to varying depths across the deposit and have been classified as oxidised, transitional or fresh zones. Examples of graphitic mineralisation in different states of weathering and kaolinisation are shown in Figure 4.34 to Figure 4.41.

The oxidised (highly weathered) domain is characterised by the oxidation of sulfide minerals, and by the breakdown of silicate minerals e.g. feldspars to form kaolinite and other hydrous clays; these minerals have a higher volume that the original feldspar and are often noted to split open the ends of graphite flakes.

The transitional domain is characterised by mixed fresh (unoxidised) and oxidised material, while the fresh (slightly weathered to unweatherd) domain contains only unoxidised rocks characterised by fresh feldspars and sulfide minerals.

Weathering domains in graphite deposits typically have different processing characteristics and are therefore reported individually.

4.11.4 Geological logging

AMC notes that there seem to be some inconsistencies in geological logging. For example, two intersections logged as QFR (quartz feldspar rock) are visually different, both texturally and mineralogically (Figure 4.20 and Figure 4.21):

- TGDD1033 QFR has the appearance of coarse-grained quartz feldapr pegmatite
- TGDD1032 QFR appears to be a medium grained metasediment possibly a carbonate?

AMC recommends that the next phase of this project includes some relogging of ‘key’ drillholes to verify description and classification of waste rocks and graphite mineralisation, with particular reference to exisiting petrographic data. This would help improve geological confidence.

AMC is of the opinion that the genesis of various types of QFR is important to consider, as QFR metasediments are expected to be concordant with other lithologies, while pegmatites could be cross cutting. This may influence geological modelling.

Figure 4.20 TGDD1033 QFR pegmatite?



Figure 4.21 TGDD1032 QFR metasediment?



Figure 4.22 Petrography samples location (L) and white kaolinisation provisional distribution interpreted from geology logs and core photo review (R)

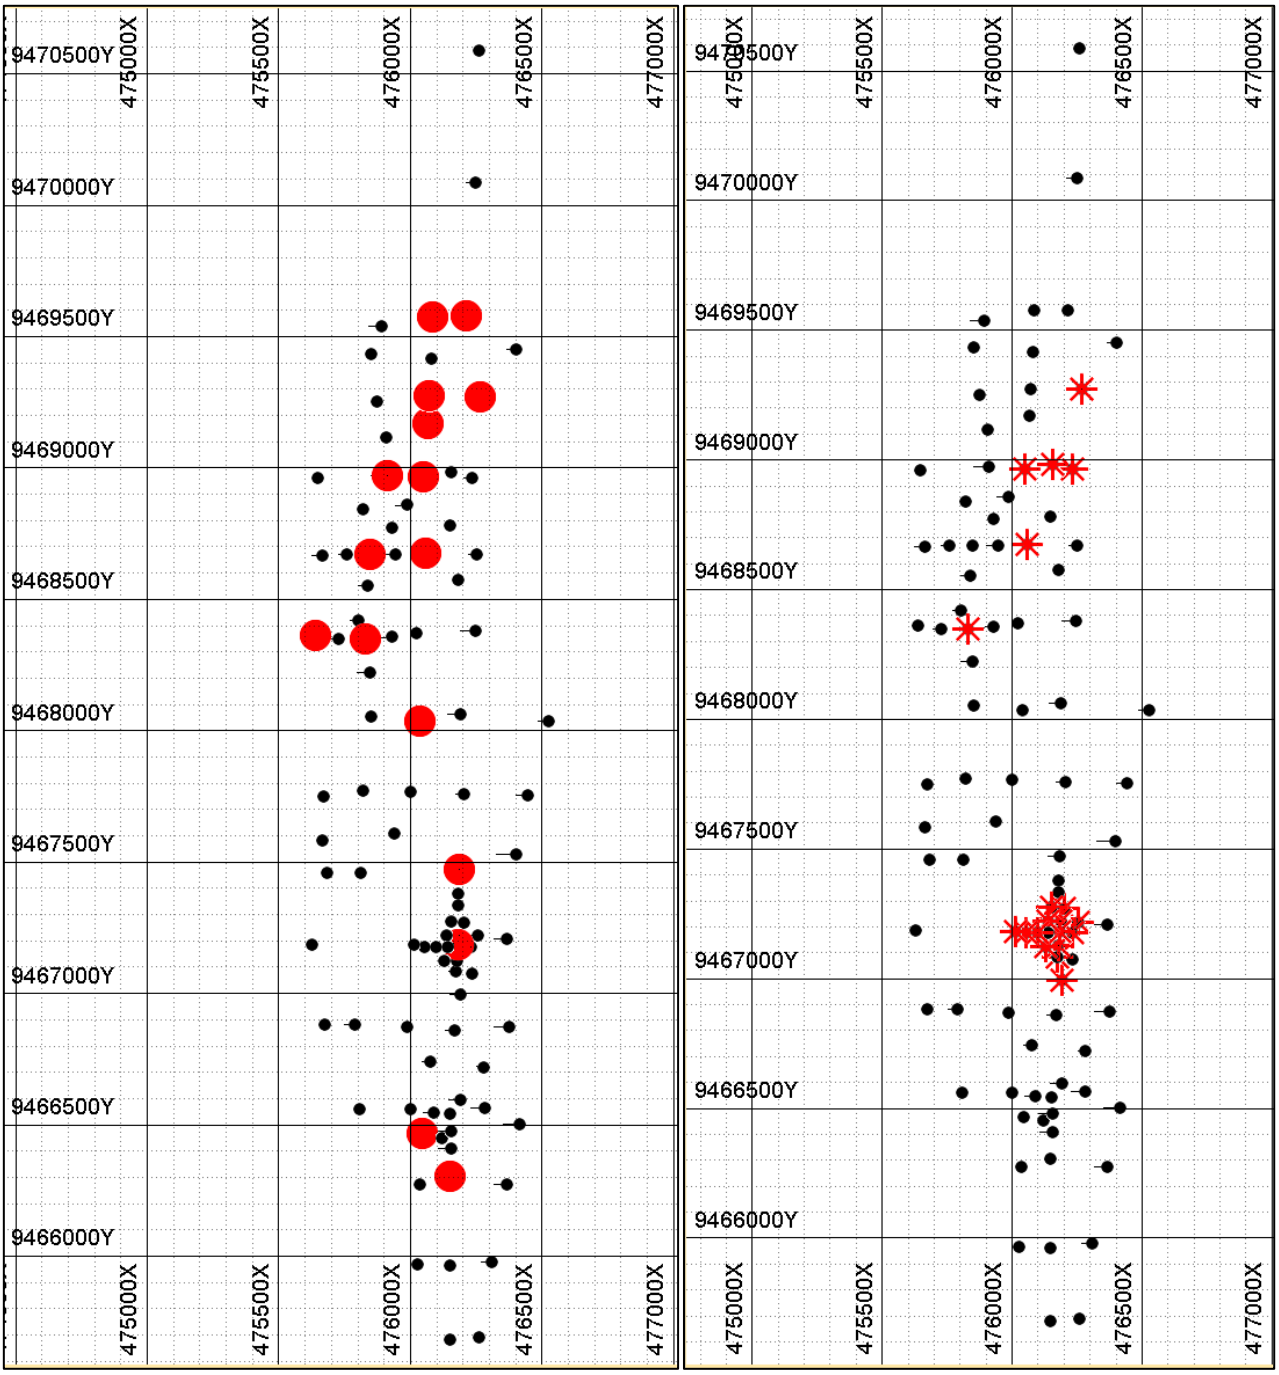


Table 4.13 Hole and thin section IDs and depths

Hole ID	Section ID	from (m)	to (m)	Hole ID	Section ID	from (m)	to (m)
TGDD1002	TGF105	32.87	32.96	TGDD1026	1026/3	60.4	60.51
TGDD1002	TGF107	39.93	40.02	TGDD1026	TGF256	71.91	71.97
TGDD1002	TGF110	54.3	54.39	TGDD1026	1026/4	73.95	74.05
TGDD1002	TGF120	108	108.07	TGDD1026	1026/5	92.92	93.02
TGDD1003	TGF088	51.46	51.55	TGDD1029	TGF179	12.58	12.66
TGDD1003	TGF099	136.31	136.4	TGDD1029	1029/1	23.22	23.29

Hole ID	Section ID	from (m)	to (m)	Hole ID	Section ID	from (m)	to (m)
TGDD1003	TGF100	140.44	140.52	TGDD1029	TGF180	27.9	28.0
TGDD1006	TGF019	32.48	32.57	TGDD1029	1029/2	29.03	29.1
TGDD1006	TGF023	70.17	70.25	TGDD1029	TGF181	37.63	37.7
TGDD1008	TGF038	21.55	21.63	TGDD1029	1029/3	37.87	37.95
TGDD1008	TGF043	47.92	47.97	TGDD1029	1029/4	47.54	47.6
TGDD1008	TGF046	74.28	74.35	TGDD1029	TGF184	75.22	75.3
TGDD1008	TGF049	100.13	100.24	TGDD1029	1029/5	86.9	87.0
TGDD1008	TGF053	120.34	120.4	TGDD1037	1037/1	21.1	21.2
TGDD1009	TGF002	18.25	18.38	TGDD1037	TGF359	33.04	33.1
TGDD1009	TGF004	34.75	34.85	TGDD1037	TGF362	57.75	57.82
TGDD1009	TGF009	76.25	76.35	TGDD1037	TGF363	65.73	65.8
TGDD1012	TGF065	17.95	18.03	TGDD1037	TGF365	80.73	80.8
TGDD1012	TGF075	111.62	111.69	TGDD1037	TGF368	98.73	98.8
TGDD1013	TGF077	48.15	48.25	TGDD1037	TGF371	118.34	118.43
TGDD1013	TGF084	90.62	90.7	TGDD1039	1039/1	33.2	33.3
TGDD1015	TGF060	30.8	30.9	TGDD1039	TGF388	35.57	35.63
TGDD1015	TGF062	38.78	38.88	TGDD1039	TGF390	45.27	45.34
TGDD1016	TGF212	12.24	12.32	TGDD1039	TGF391	50.0	50.06
TGDD1016	TGF214	33.54	33.6	TGDD1039	1039/6	65.06	65.16
TGDD1016	TGF215	39.89	39.96	TGDD1039	TGF394	70.79	70.86
TGDD1016	TGF220	92.22	92.3	TGDD1039	TGF397	92.8	92.87
TGDD1019	TGF225	5.86	5.93	TGDD1039	1039/5	94.0	94.1
TGDD1019	1019/1	14.89	14.91	TGDD1039	TGF399	107.85	107.92
TGDD1019	1019/1	25.04	25.14	TGDD1039	TGF400	115.4	115.46
TGDD1019	TGF230	41.74	41.82	TGDD1048	TGF342	2.94	3.02
TGDD1019	1019/3	49.7	49.78	TGDD1048	1048/1	11.07	11.16
TGDD1019	1019/4	56.07	56.14	TGDD1048	TGF343	11.63	11.7
TGDD1019	TGF234	77.89	77.95	TGDD1048	TGF346	59.46	59.53
TGDD1019	TGF237	101.1	101.18	TGDD1048	1048/3	70.7	70.78
TGDD1026	1026/1	18.5	18.6	TGDD1048	TGF348	77.48	77.57
TGDD1026	TGF250	22.08	22.14	TGDD1048	TGF351	100.21	100.29
TGDD1026	TGF252	39.75	39.83	TGDD1048	TGF356	132.29	132.36

Figure 4.23 TGDD1016 TGF212 ~12 m quartz feldspar haematitic clay matrix graphite sillimanite ‘few specks pyrite’. TGDD1048 TGF342 ~3 m quartz feldspar clay graphite, no sulfides. Similar to Oxide metallurgy composite TDM007

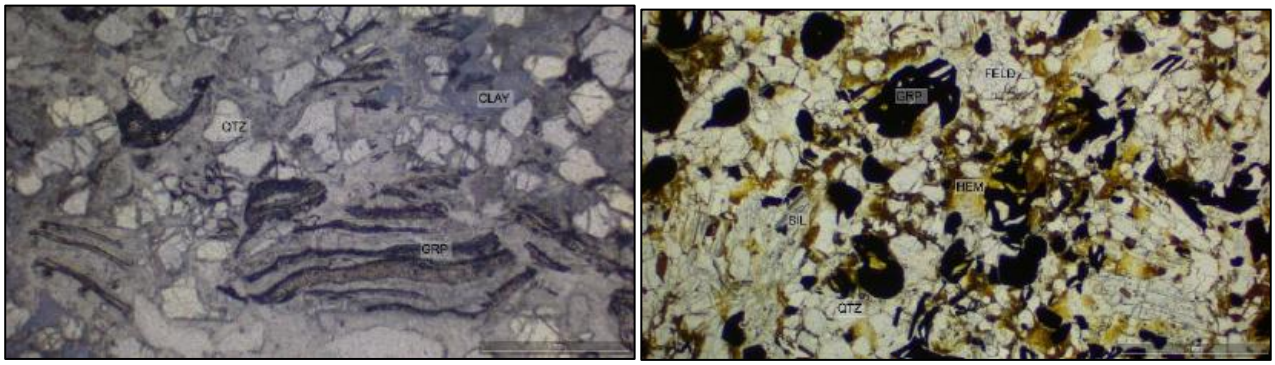


Figure 4.24 TGDD1029 TGF181 ~37 m kaolinised graphite schist (L) TGF184 kaolinised graphite schist ~75m. Similar to Kaolinised metallurgy composite TDM008

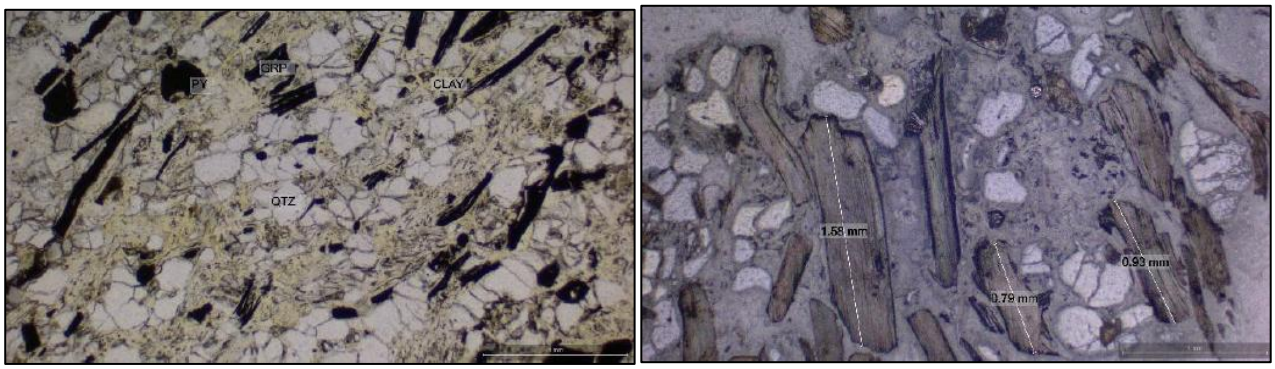


Figure 4.25 TGDD1019 TGF237 ~101 m quartz bioitite schist with sulfides and small graphite flakes (L). TGF234 ~78 m. Similar to Fresh metallurgy composite TDM001

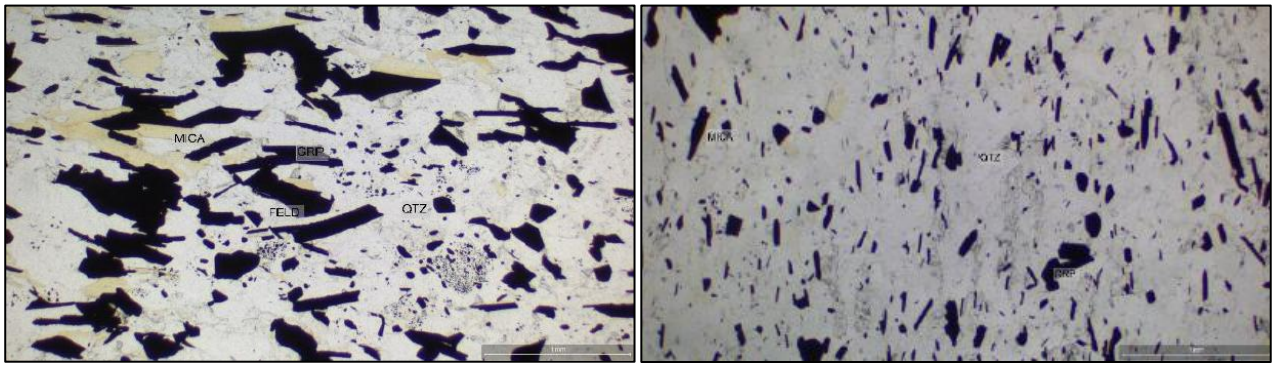


Figure 4.26 TGDD1026 TGF250 ~22 m quartz mica feldspar graphite pyrite, mostly small flakes. Similar to Fresh metallurgy composite TDM002 (L). Quartz calcite feldspar mica graphite pyrite TGF362 1037 ~58 m. Similar to Fresh metallurgy composite TDM003 (R)

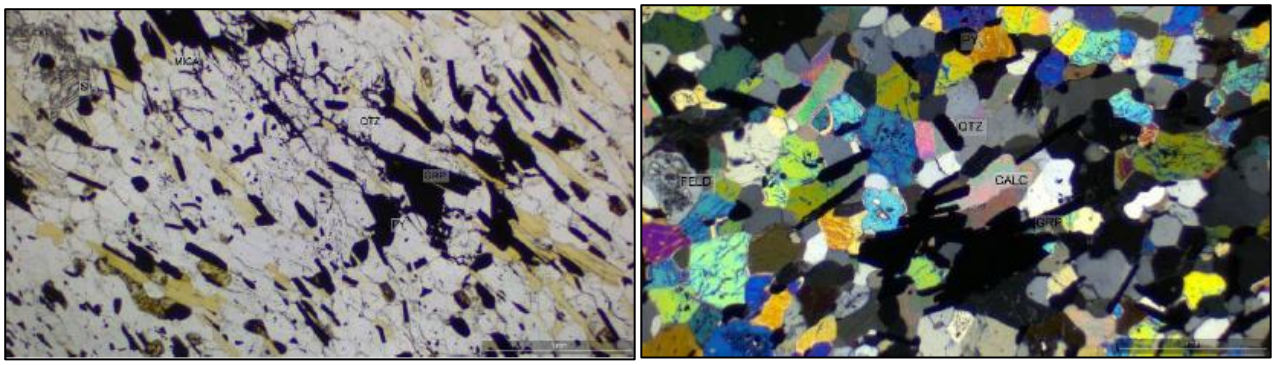


Figure 4.27 Quartz mica feldspar graphite pyrite TGF391 1039 ~50 m. Similar to Fresh metallurgy composite TDM004 (L). Feldspar quartz biotite pyroxene graphite pyrite TGF346 1048 ~59 m. Similar to Fresh metallurgy composite TDM005 (R).


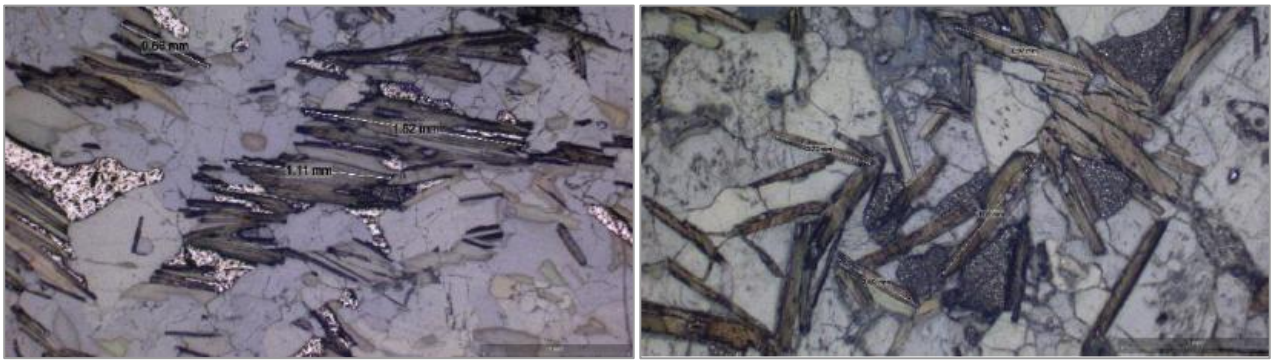


Figure 4.28 TGDD1019 TGF234 ~78 m Fresh, unoxidised quartz biotite feldspar graphite pyrite (L). Fresh quartz mica feldspar graphite pyrite TGF397 1039 ~93 m (R)

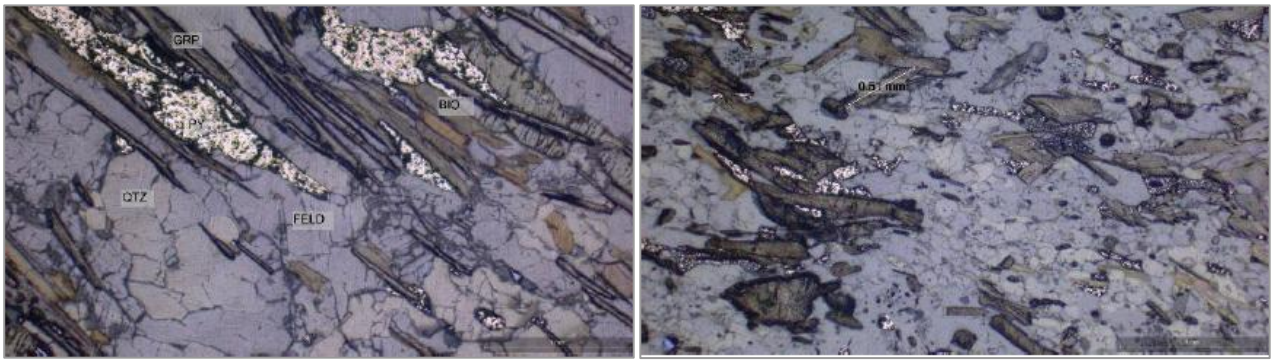

4.11.5 Metallurgy

Sample selection

Grapeak, in discussion with AMC, selected eight individual drill composites from across the deposit with the following objectives in mind:

- Sample selection to assess variability between lithologies and a range of TGC and sulfur contents.
- Samples to be representative of different lithologies and weathering domains.
- Samples to be distributed evenly across the deposit, taken from individual drillholes and not composited between holes. AMC is of the opinion that compositing between holes and or domains may camouflage variability in flake size, purity or yield.
- Each sample to be about 10 kg, sufficient for initial optimisation testwork and for the production of larger concentrate volumes should the need arise.

Sample locations, depth and geological domain details are presented in Figure 4.29 and Table 4.14. Drillhole profiles, with metallurgy composite locations and ID, TGC and S analyses are given in Figure 4.30 to Figure 4.33. Core photographs are presented in Figure 4.34 to Figure 4.41.

Metallurgy testwork

As described by IMO (2025) the scope for this testwork program comprised of four stages as follows:

8 Sample preparation and characterisation.

9 Optimisation Composite (Fresh & Oxide) testwork.

10 Variability Composite testwork.

11 Selected Variability Composite optimisation testwork.

Eight composites were submitted to IMO's sister company, Metallurgy Pty Ltd (Metallurgy), as ¼ Diamond Drill (DD) core (Table 4.14).

The head samples were analysed by X-ray Fluorescence (XRF). Total Carbon (TC), TGC, Carbonate (CO_3), TS, Sulfide Sulfur (S2-) and Sulfate (SO_4^{2-}) were tested by a Carbon and Sulfur Analyser; and Loss on Ignition (LOI) at both 1,000 and 425 °C.

Carbon speciation results from each composite are shown in Table 4.15. Estimated TGC based on drill analyses is included for comparative purposes. All composites contained graphite as the primary carbon bearing mineral, except for TDM002 and 004 which contained >1% carbonate content.

Sulfur speciation and LOI results are shown in Table 4.16. Total sulfur ranges from 0.07% to 6.46%, for all composites except for TDM006 and TDM007, most of the sulfur presented as sulfides. This highlights that sulfide minerals have been oxidised and sulfur leached from the oxide composites, as expected.

Major element analyses are presented in Table 4.17 and highlight that Na and K are lowest in the oxide and kaolinised composites (TDM006, 007, 008) reflecting the weathering of feldspars to clays. Silica (SiO_2) was the main impurity within the composites tested, ranging from 44.35% to 59.97% and is expected to be mainly in the form of quartz.

Flotation results - summary

IMO concluded that:

- All composites achieved a final concentrate TC grade of >97%. TC recoveries for all composites except for TMD004 were >89% with TDM004's low TC recovery (75.8%) due to a high carbonate mineral content.
- Oxide composite flake contents were relatively coarse with >57% +150 µm.
- Three of the fresh composites also had high coarse flake contents with TDM003 to TDM005 all having a >61% of +150 µm.
- TDM001 and TDM0002 (fresh) both had lower respective premium price flake (+150 µm) contents of 34.8% and 42.5% which reflects thin section observations.
- TDM008 (kaolinised) had the highest content of coarse flake (+150 µm) at 73%.

Flake size and purity details are presented in Table 4.18, Table 4.19, and Table 4.20.

4.11.6 Conclusions

The 2025 testwork programme on drill core samples demonstrated that the Tanga mineralisation is amenable to the production of high-grade graphite concentrates, generally at coarse flake sizes, using relatively straightforward flotation processes. AMC notes that laboratory-scale metallurgical variability testwork may not necessarily reflect final plant-scale process conditions or concentrate quality.

AMC is of the opinion that current petrographic and extractive metallurgical data support the classification of the Tanga deposit as an Industrial Mineral Resource in terms of the JORC Code Clause 49.

Figure 4.29 Metallurgy sample drill collar location map


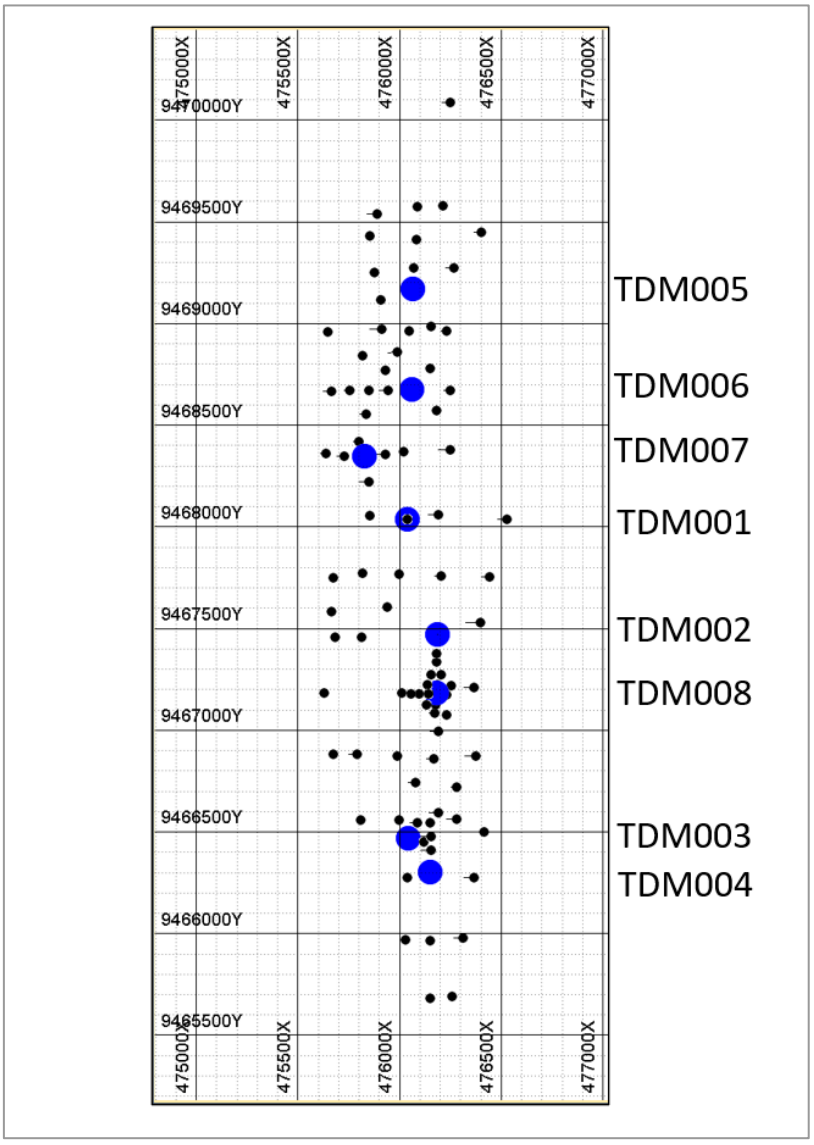


Table 4.14 Metallurgy samples: drillhole ID, depths, approximate grades, mass and weathering domains

Met ID	BH ID	from (m)	to (m)	TGC %	Total S %	kg	Weathering	Colour
TDM001	TGDD1019	73.50	79.50	~10	~5	11.34	Fresh	grey
TDM002	TGDD1026	26.50	33.05	~9	~3	11.40	Fresh	grey
TDM003	TGDD1037	51.80	57.80	~5	~3	11.04	Fresh	grey
TDM004	TGDD1039	46.30	52.90	~6	~1	12.58	Fresh	grey
TDM005	TGDD1048	57.80	66.80	~7	~4	8.76	Fresh	grey
TDM006	TGDD1013	2.20	12.17	~7	~0	10.11	Oxidised	brown
TDM007	TGDD1016	10.24	15.10	~7	~0	8.60	Oxidised	brown
		15.40	22.24	~8	~0			
TDM008	TGDD1029	68.30	75.80	~10	~8	9.70	Kaolinised	off-white
		77.80	81.80	~9	~8			

Figure 4.30 Fresh metallurgy samples TDM001 and 002: holes TGDD1019 and 1026

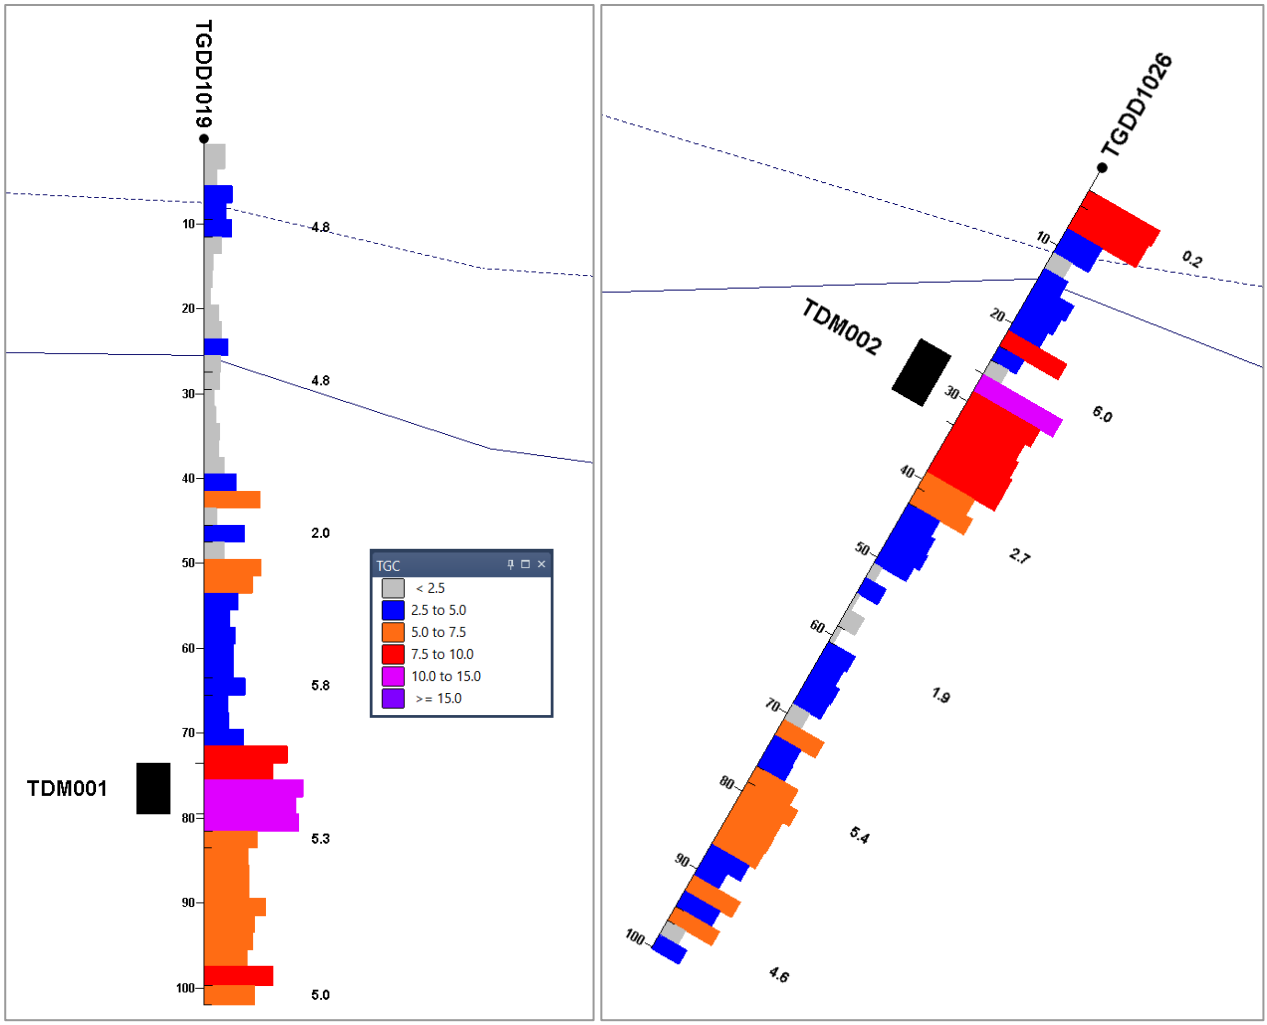

Note: Depths down hole (metres) to the left of drill trace. Percent sulfur values at ~20 m intervals down hole, to the right of drill trace.

Figure 4.31 Fresh metallurgy samples TMD003, 004 and 005: holes TGDD1037, 1039 and 1048



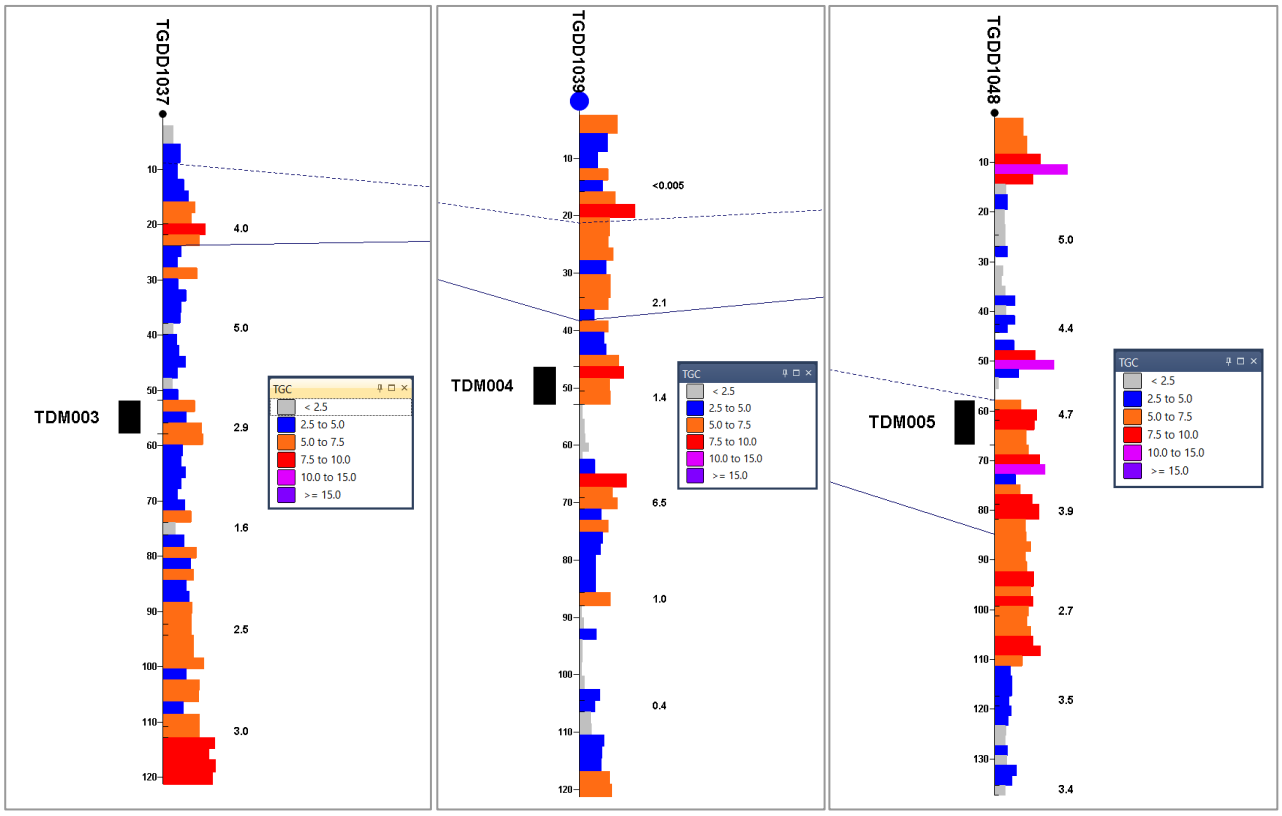


Figure 4.32 Oxide metallurgy samples TDM006 and 007: holes TGDD1013 and 1016

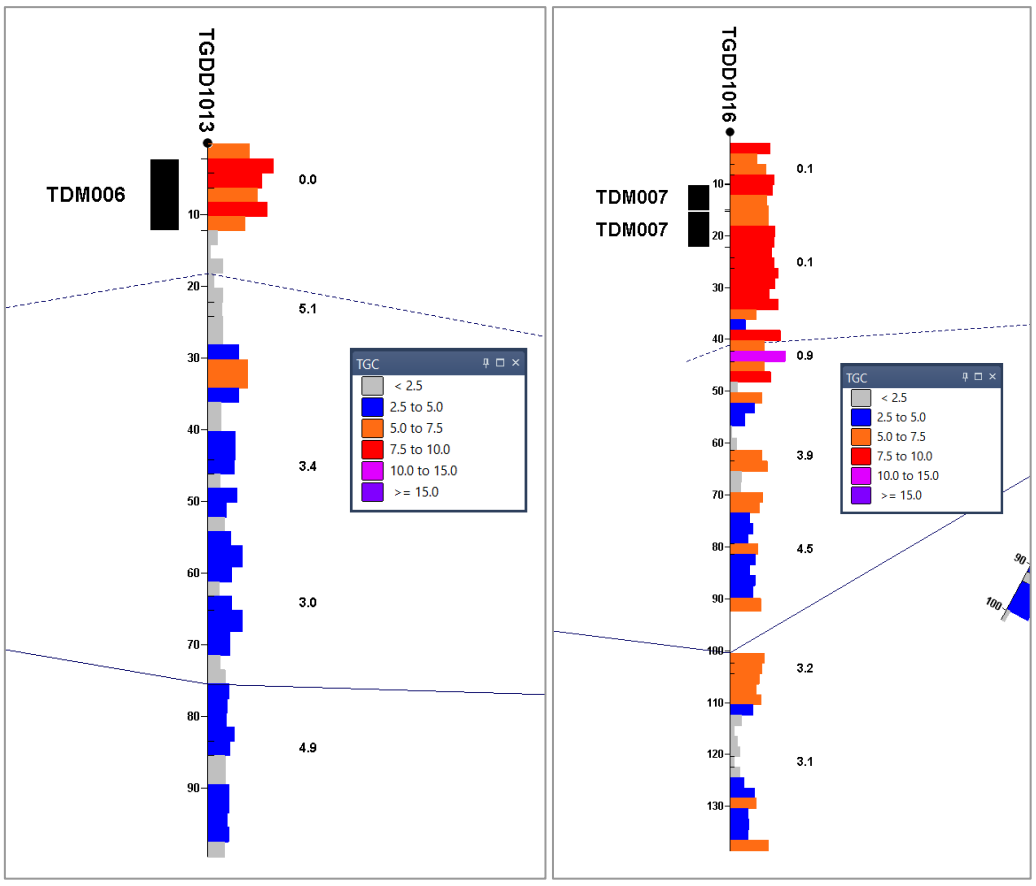

Note: Low sulfur values 0-0.1% in the oxide domain.

Figure 4.33 Kaolinised metallurgy sample TDM008: hole TGDD1029

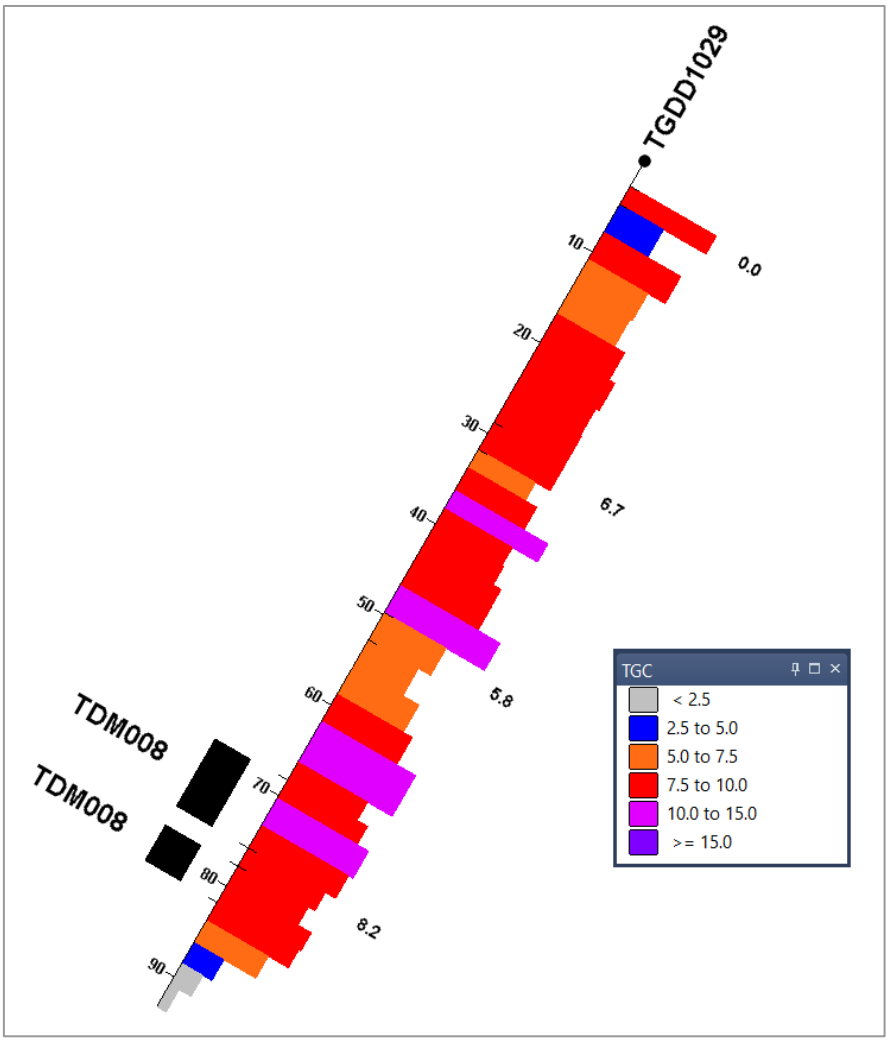

Note: High sulfur (~6-8%) in kaolinised graphite mineralisation. No sulfur detected in oxide domain at start of hole.

Figure 4.34 Met sample TDM001 (fresh) TGDD1019 (73.5-79.5 m)

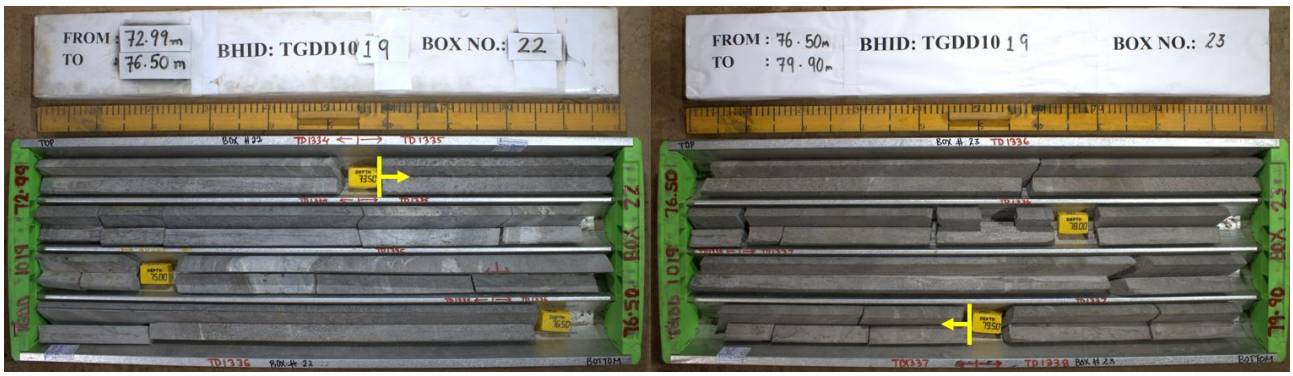


Figure 4.35 Met sample TDM002 (fresh) TGDD1026 (26.5-33.05 m)

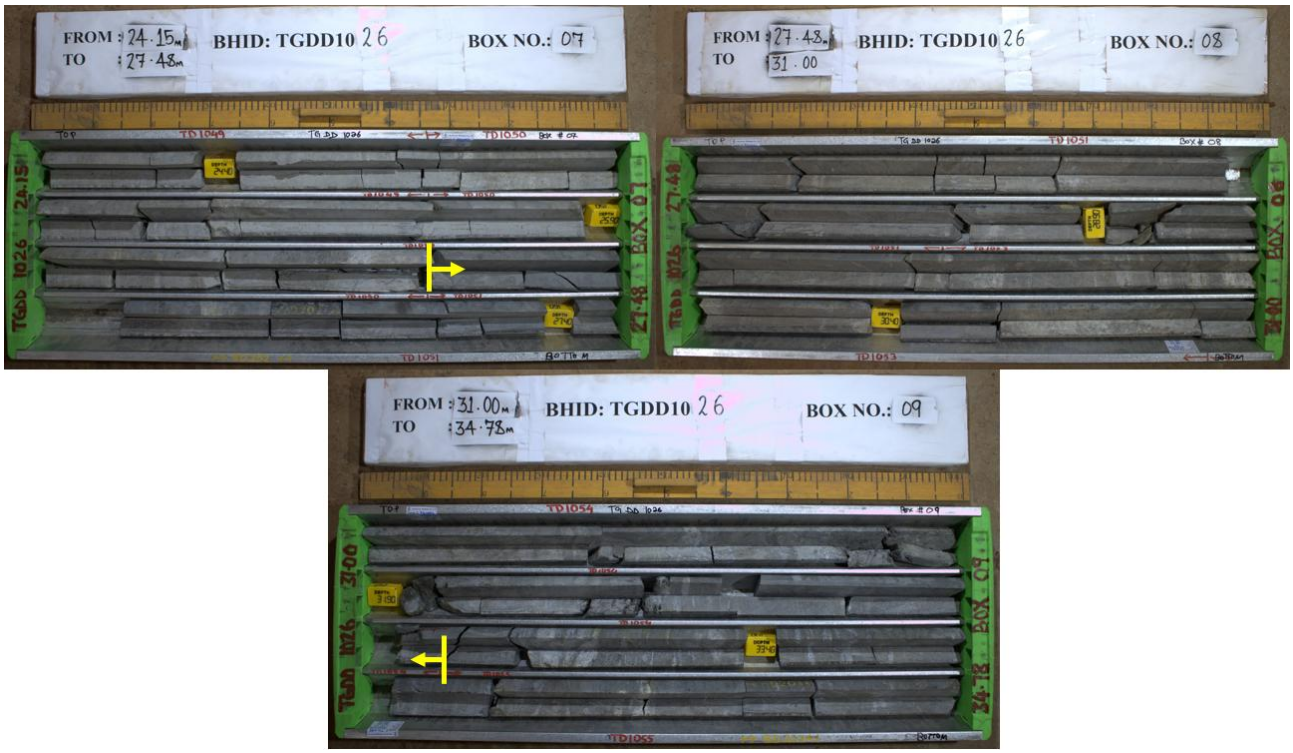


Figure 4.36 Met sample TDM003 (fresh TGDD1037 (51.8-57.8 m)

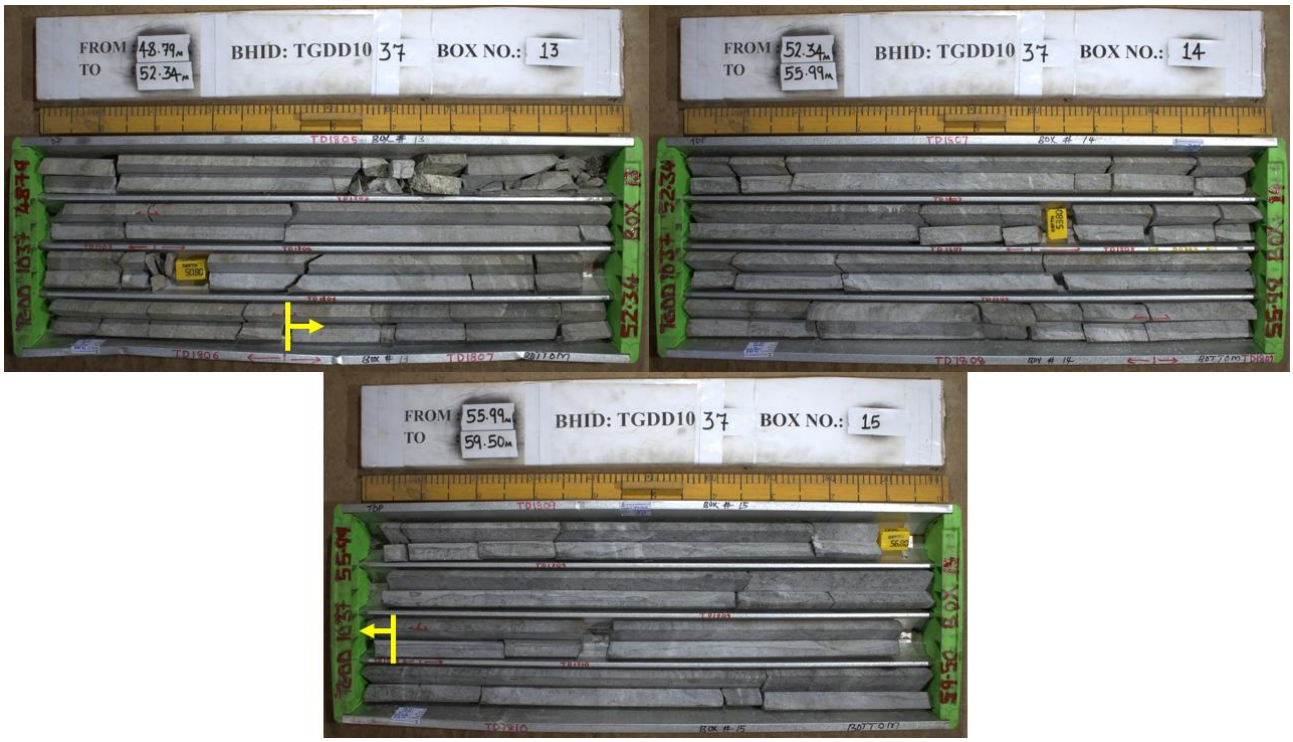


Figure 4.37 Met sample TDM004 (fresh) TGDD1039 (46.3-52.9 m)

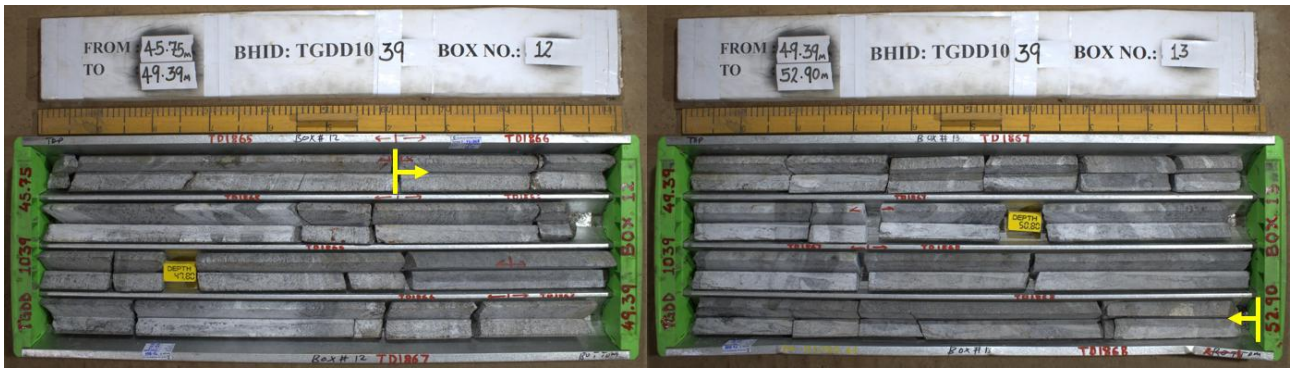


Figure 4.38 Met sample TDM005 (fresh) TGDD1048 (57.8-66.8 m)

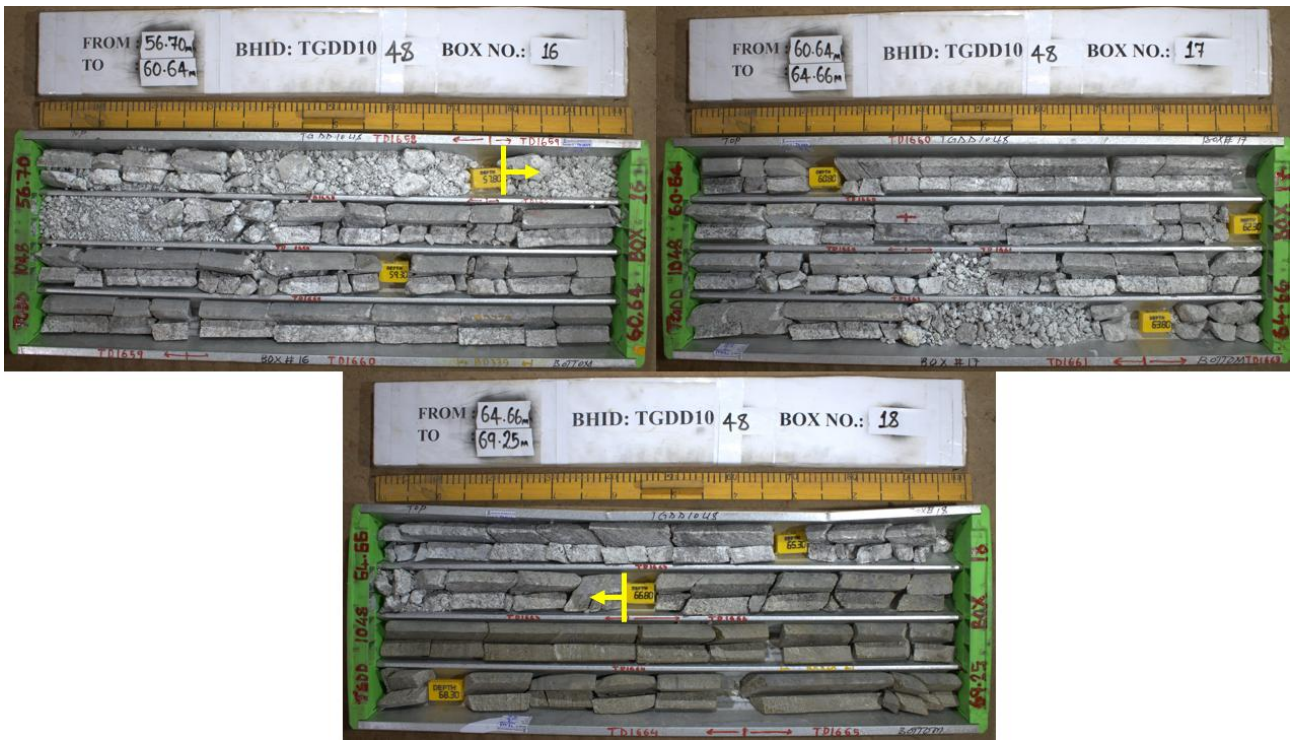


Figure 4.39 Met sample TDM006 (oxidised) TGDD1013 (2.2-12.17 m)

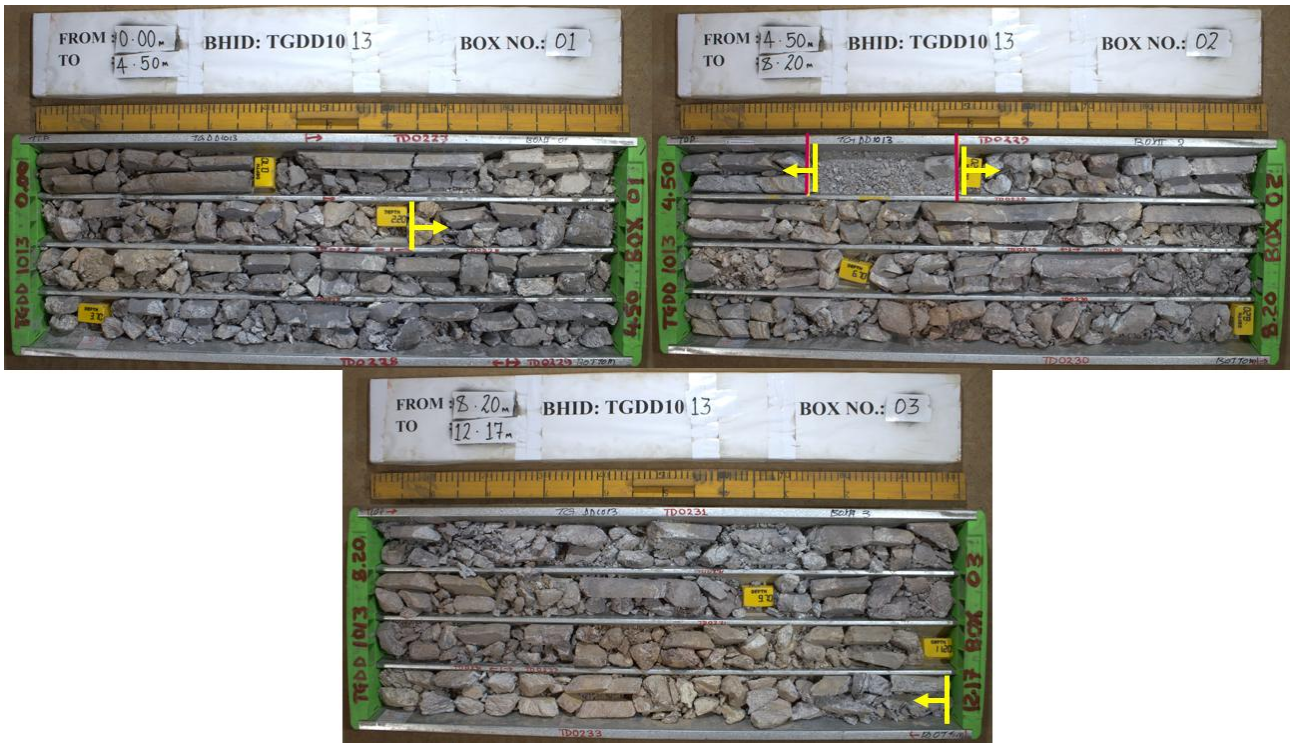


Figure 4.40 Met sample TDM007 (oxidised) TGDD1016 (10.24-15.1 + 15.4-22.24 m)



Figure 4.41 Met sample TDM008 (kaolinised) TGDD1029 (68.3-75.8 + 77.8-81.8 m)

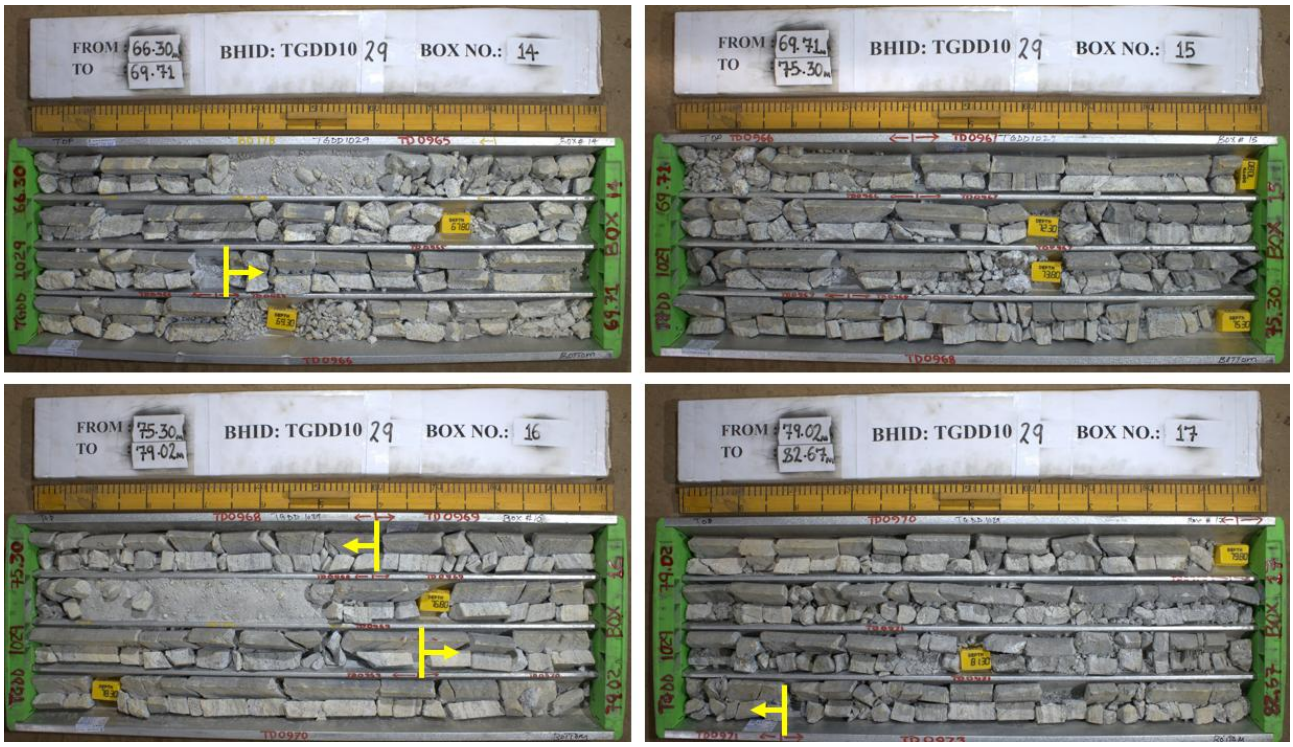


Table 4.15 Individual composite carbon speciation compared with drill assays

Element	TDM001	TDM002	TDM003	TDM004	TDM005	TDM006	TDM007	TDM008
	fresh	fresh	fresh	fresh	fresh	oxide	oxide	kaolinised
	(%)	(%)	(%)	(%)	(%)	(%)	(%)	(%)
TGC- Interval estimate	10.0	9.0	5.0	6.0	7.0	7.0	7.6	9.7
TGC	9.5	8.2	6.3	5.8	7.4	8.0	8.0	7.7
TGC Rpt	10.2	8.3	5.8	6.2	NC	NC	NC	NC
Total Carbon	10.38	8.94	5.93	8.11	7.68	8.83	8.13	8.13
Total Carbon Rpt	10.31	7.86	5.81	6.94	7.53	8.06	8.02	7.72
Carbonate	0.07	1.08	0.12	1.17	0.15	0.77	0.11	0.41
Carbonate Rpt	0.02	0.24	0.12	1.83	NC	NC	NC	NC
Non-Carbonate Carbon	10.31	8.33	5.89	6.18	7.53	8.06	8.02	7.72

Table 4.16 Individual composite sulfur speciation and LOI

Element	TDM001	TDM002	TDM003	TDM004	TDM005	TDM006	TDM007	TDM008
	fresh	fresh	fresh	fresh	fresh	oxide	oxide	kaolinised
	%	%	%	%	%	%	%	%
S	4.06	3.78	3.74	2.24	5.06	0.08	0.07	6.46
SO42+	0.02	0.03	0.03	0.01	0.16	0.07	0.08	0.32
S2-	4.04	3.75	3.71	2.23	4.9	0.01	<0.01	6.14
LOI 1,000°C	12.85	10.86	8.37	10.54	15.26	14.01	15.7	17.87
LOI 425°C	0.12	0.27	0.12	0.00	1.11	1.25	2.44	1.36

Table 4.17 Individual composite major element XRF results

Element	TDM001	TDM002	TDM003	TDM004	TDM005	TDM006	TDM007	TDM008
	fresh	fresh	fresh	fresh	fresh	oxide	oxide	kaolinised
	(%)	(%)	(%)	(%)	(%)	(%)	(%)	(%)
SiO2	54.42	54.57	56.83	44.35	55.94	59.97	53.9	49.22
Al2O3	12.76	12.7	14.6	12.38	17.09	18.64	20.52	18.8
Fe2O3	6.74	6.33	7.43	5.59	6.37	5.26	7.94	7.7
K2O	1.97	1.27	2.7	2.17	2.75	0.03	0.08	1.97
Na2O	0.77	0.61	1.27	0.92	0.23	0.09	0.05	0.16
CaO	6.03	8.22	4.55	15.18	0.06	0.02	0.01	0.22
MgO	3.26	3.77	2.82	4.93	1.39	0.03	0.04	0.27
BaO	0.15	0.14	0.1	0.05	0.15	0.09	0.05	0.42
MnO	0.08	0.1	0.07	0.08	0.02	<0.01	<0.01	<0.01
P2O5	0.306	0.295	0.252	0.251	0.073	0.154	0.21	0.29
SO3	3.618	1.434	6.34	2.781	7.055	0.119	0.015	8.241
TiO2	0.67	0.65	0.69	0.58	0.63	0.97	1.02	1.05
V2O5	0.14	0.155	0.146	0.098	0.27	0.135	0.109	0.158

Table 4.18 Fresh composites concentrate size by assay results

Sample ID	TDM001			TDM002			TDM003		
Test ID	FT02			FT03			FT05		
Size Fraction (µm)	Mass	TC		Mass	TC		Mass	TC	
	Recovery	Grade (%)	Recovery	Recovery	Grade (%)	Recovery	Recovery	Grade (%)	Recovery
500	0.1%	98.67	0.1%	0.5%	98.94	0.5%	1.9%	97.86	1.9%
300	3.9%	98.67	3.9%	5.4%	98.94	5.4%	18.6%	98.76	18.9%
180	19.3%	99.03	19.4%	23.2%	99.28	23.3%	30.1%	98.98	30.7%
150	11.3%	99.41	11.4%	13.2%	99.18	13.3%	9.9%	97.83	10.0%
106	26.5%	99.07	26.6%	22.9%	99.02	23.0%	14.5%	97.33	14.5%
75	16.4%	99.01	16.5%	15.6%	98.67	15.6%	8.6%	97.02	8.6%
38	12.1%	98.47	12.1%	11.7%	99.08	11.8%	7.5%	97.17	7.5%
-38	10.4%	94.97	10.0%	7.5%	93.64	7.1%	8.8%	86.76	7.9%
Total Con	100%	98.58	100%	100%	98.64	100%	100%	97.18	100%

Sample ID	TDM004			TDM005		
Test ID	FT06			FT07		
Size Fraction (µm)	Mass	TC		Mass	TC	
	Recovery	Grade (%)	Recovery	Recovery	Grade (%)	Recovery
500	5.4%	99.04	5.5%	4.5%	98.17	4.6%
300	20.2%	98.89	20.4%	25.3%	98.55	25.7%
180	26.4%	98.64	26.6%	27.1%	98.33	27.4%
150	8.4%	98.40	8.5%	8.2%	98.48	8.3%
106	13.5%	98.25	13.6%	11.0%	98.06	11.1%
75	8.5%	98.28	8.6%	6.7%	98.86	6.8%
38	8.3%	97.36	8.2%	7.0%	97.24	7.0%
-38	9.1%	91.46	8.5%	10.0%	87.39	9.0%
Total Con	100%	97.85	100.0%	100%	97.22	100.0%

Table 4.19 Oxide composites concentrates (TDM006, 007) and kaolinised concentrate (TDM 008) size by assay results

Sample ID	TDM006			TDM007			TDM008		
Test ID	FT01			FT08			FT04		
Size Fraction (µm)	Mass	TC		Mass	TC		Mass	TC	
	Recovery	Grade (%)	Recovery	Recovery	Grade (%)	Recovery	Recovery	Grade (%)	Recovery
500	8.7%	99.16	8.8%	1.5%	97.99	1.5%	14.1%	98.76	14.3%
300	28.0%	99.13	28.2%	12.7%	98.87	12.8%	26.3%	98.37	26.5%
180	24.2%	98.61	24.3%	30.3%	97.08	30.2%	25.1%	98.10	25.3%
150	6.3%	98.47	6.3%	12.7%	98.28	12.8%	7.2%	97.29	7.2%
106	9.9%	98.58	9.9%	19.4%	97.92	19.5%	9.8%	97.03	9.8%
75	6.8%	97.92	6.7%	11.7%	98.09	11.7%	6.0%	96.87	6.0%
38	6.7%	99.39	6.8%	8.0%	97.43	8.0%	5.2%	96.39	5.1%
-38	9.4%	94.89	9.1%	3.8%	91.95	3.6%	6.3%	89.16	5.8%
Total Con	100%	98.45	100%	100%	97.43	100%	100%	97.37	100%

Table 4.20 Summary flake size and TC grade: coarse fraction (>150 µm) vs fine fraction (<150 µm)

	Fresh					Oxide / kaolinised		
Sample ID	TDM001	TDM002	TDM003	TDM004	TDM005	TDM006	TDM007	TDM008
Test ID	FT02	FT03	FT05	FT06	FT07	FT01	FT08	FT04
Size Fraction	Mass Recovery	Mass Recovery	Mass Recovery	Mass Recovery	Mass Recovery	Mass Recovery	Mass Recovery	Mass Recovery
>150	34.6%	42.2%	60.5%	60.5%	65.2%	67.2%	57.1%	72.7%
<150	65.4%	57.8%	39.5%	39.5%	34.8%	32.8%	42.9%	27.3%
Total Con	100%	100%	100%	100%	100%	100%	100%	100%
TC Grade	98.58%	98.64%	97.18%	97.85%	97.22%	98.45%	97.43%	97.37%

4.11.6.1 Offtake agreement

There are no offtake agreements in place.

4.11.7 Classification

The Mineral Resource has been classified in accordance with the JORC Code. Key criteria that have been considered when classifying the Mineral Resource are detailed in JORC Code Table 1 (Appendix A).

This classification is based upon assessment and understanding of the deposit style, geological and grade continuity, drillhole spacing, input data quality (including drill collar surveys and bulk density), and interpolation parameters using OK.


The Mineral Resource was classified as Indicated and Inferred Mineral Resource, accounting for the level of geological understanding of the deposit, quality of samples, density data, drillhole spacing and sampling, analytical and metallurgical processes. Material classified as Indicated was considered sufficiently informed by adequately detailed and reliable geological and sampling data to assume geological, grade and quality continuity between data points. Material classified as Inferred was considered sufficiently informed by geological and sampling data to imply geological, grade and quality continuity between data points.

- In general, the Mineral Resource was classed as an Indicated Mineral Resource for model cells that were within semi-variogram ranges and in the areas of the drilling where the drillhole density was reduced to line spacing approximately 250 m and hole spacing to 150 m.
- The Mineral Resource was classified as Inferred where model cells were located beyond one semi-variogram range. Smaller mineralised zones supported by a limited number of drillholes were also classified as Inferred.

The classification reflects the level of data available for the estimate, including input drillhole data spacing, metallurgical and petrographic data, and confidence in geological continuity for this style of deposit.

Figure 4.42 provides a visual representation of classification of the Mineral Resource estimate.

Figure 4.42 Mineral Resource classification in 3D view (Green – Indicated; Blue – Inferred)

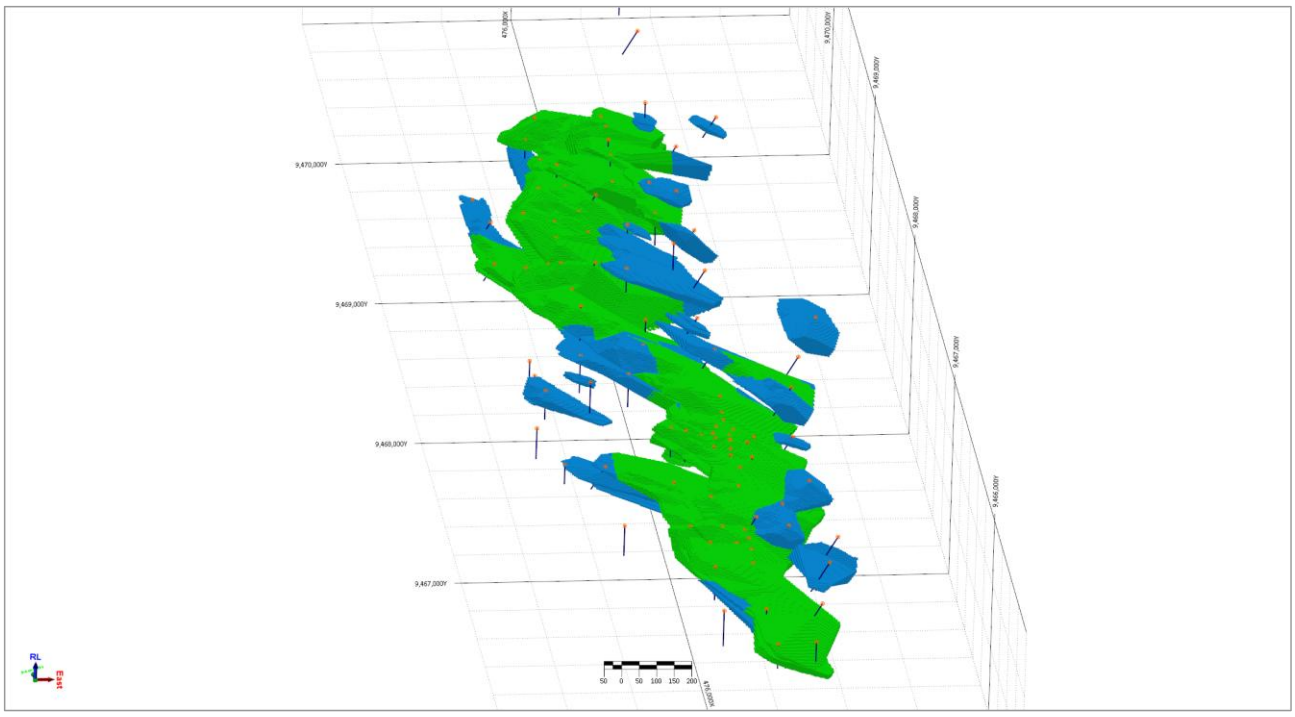

5 Reporting

The MRE has been reported in accordance with the JORC Code and it is therefore suitable for public release in a suitable summary statement and accompanying JORC Code Table 1 and Competent Person statement. The MRE is reported by classification in Table 5.1. The Mineral Resource has been reported above a cut-off of 3.0% TGC and is current to 1 November 2025.

Table 5.1 Tanga Graphite Project Mineral Resource (>3% TGC)

JORC Code Classification	Oxidation	Tonnage (Mt)	Total Graphitic Carbon (TGC %)
Indicated	Oxide	22	5.46
	Transition	58	5.00
	Fresh	69	4.72
	Total	**148**	**4.94**
Inferred	Oxide	5	4.89
	Transition	15	4.54
	Fresh	16	4.40
	Total	**35**	**4.52**
Total	Oxide	26	5.36
	Transition	72	4.90
	Fresh	85	4.66
	Total	**183**	**4.86**

Notes:

- Reported at a cut-off grade of 3% TGC for an open pit mining scenario.
- Resources reported within the prospecting and mining licences acquired by Grapeak.
- The model is currently not reported within a constraining nominal pit shell of any sort. This might change in future reporting.
- Cut-off date of 1 November 2025.
- Estimation for the model is by ordinary kriging.
- Classification is in accordance with the JORC Code Mineral Resource guidelines.
- Totals may vary due to rounded figures.

6 Conclusions

The Tanga Graphite Project represents a significant flake-graphite occurrence hosted within high-grade metamorphic schists of the Mozambique Belt. The comprehensive exploration programme—including surface sampling, detailed geological mapping, petrographic and mineralogical studies, and a substantial diamond drilling campaign totalling 100 holes and 9,421.4 m—has provided a robust dataset suitable for MRE. Geological logging confirmed laterally continuous graphitic schist units, supported by consistent TGC assay profiles and well-developed structural and metamorphic fabrics.

The data collection procedures, including drilling, surveying, logging, sampling, assaying, bulk density determination and QAQC, were carried out to industry standards and are appropriate to support the estimation of Mineral Resources. Statistical analysis showed no requirement for top-cutting of TGC, and bulk density assignments were reliably determined using weathering-based domains. Variography, domaining, and geostatistical modelling demonstrated geological continuity sufficient to support both Indicated and Inferred Mineral Resource classifications, depending on drill spacing.

The resulting Mineral Resource estimate reflects the geometry, grade distribution and continuity of mineralisation observed in the drilling and is considered a reasonable and robust representation of the deposit at the current level of exploration. The work completed to date provides a strong foundation for future technical studies, including mine design and metallurgical optimisation.

7 Recommendations

Based on the current level of knowledge and the review of geological, analytical and modelling datasets, the following work programmes are recommended to further de-risk and enhance future Mineral Resource updates:

- Additional geological and structural studies should be completed to refine the 3D geological model, particularly in areas where mineralisation is extrapolated and drill density is low.
- Further drilling is recommended to improve confidence in zones modelled with limited data and to convert Inferred mineralisation to higher confidence categories. Infill drilling is particularly warranted along the margins of mineralised envelopes and within structurally complex areas.
- Ongoing QAQC procedures should continue to be implemented, with the inclusion of additional coarse reject and pulp duplicate checks to further strengthen analytical confidence.
- Routine bulk density measurements should continue on future core to augment the current dataset, with density work conducted using standard water-immersion or caliper methods as appropriate for different weathering states.
- Weathering state logging should be reviewed and refined to ensure clear and consistent boundaries for future resource modelling and metallurgical assessments.
- Metallurgical testwork should be expanded to characterise flake size distribution, liberation profiles, and concentrate purity across representative zones of the deposit, supporting eventual product-specification reporting in line with JORC Clause 49.
- Market evaluations and preliminary customer engagement are recommended to support downstream planning and understand preferred product specifications and market requirements for flake graphite.

Overall, the completed work has successfully advanced the understanding of the Tanga deposit, and the recommended programs will strengthen future Mineral Resource updates and support the progression of the project toward mining studies.

8 References

Holmes, A. (1951). The sequence of Precambrian orogenic belts in South and Central Africa. In: Proceedings of the 18th International Geological Congress, London.

IMO (2025). Sakariya Mines and Minerals, Tanzanian graphite project graphite flotation draft. Project 6798, November 2025.

Joint Ore Reserves Committee, 2012, "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. The JORC Code, 2012 Edition". Prepared by: The Joint Ore Reserves Committee of The Australasian Institute of Mining and Metallurgy, Australian Institute of Geoscientists and Minerals Council of Australia (JORC).

Scogings, A.J. 2014. Public Reporting of Industrial Mineral Resources according to JORC 2012. AusIMM Bulletin No. 3, 34-38. Feature: Mineral Resource & Ore Reserve Estimation. Journal of the Australasian Institute of Mining and Metallurgy.

Scogings, A.J., Hughes, E., Salwan, S. and Li, A. 2015. Natural Graphite Report. Strategic Outlook to 2020. November 2015, 484 pp. Industrial Minerals Research, United Kingdom.

Scogings, A. J. 2015. Bulk Density: neglected but essential. Industrial Minerals Magazine, April 2015, 60-62. Industrial Minerals, Euromoney Institutional Investor PLC, Nestor House, Playhouse Yard, London EC4V 5EX, United Kingdom.

Scogings, A.J. 2015. Bulk density of industrial minerals: Reporting in accordance with the 2007 SME guide. SME Mining Engineering, July 2015 Web Exclusive. Society for Mining, Metallurgy & Exploration.

Scogings, A.J. 2018. Barite density. IMFORMED Oilfields minerals & markets Forum. Houston, 6-8 May 2018.

Scogings, A.J., Louw, G., and Shaw, W.J. 2015. Density – Neglected but Essential. The poor orphan in mineral resource estimation. AIG MEGWA, Subiaco, 16 September 2015.

Shackleton, R.M. (1986). Precambrian collision tectonics in Africa. In: Coward, M.P. & Ries, A.C. (Eds.), Collision Tectonics, Geological Society Special Publication 19, 329–349.

Stern, R.J. (1994). Arc assembly and continental collision in the Neoproterozoic East African Orogen: implications for the consolidation of Gondwanaland. Annual Review of Earth and Planetary Sciences, 22, 319–351.

Appendix A
JORC Code Table 1

Note: Section 1 and Section 2 of Table 1 were primarily completed by Grapeak and Section 3 was completed by AMC.

Section 1 Sampling techniques and data (Criteria in this section apply to all succeeding sections)		
Criteria	**JORC Code explanation**	**Commentary**
Sampling techniques	• Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. • Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. • Aspects of the determination of mineralisation that are Material to the Public Report. • In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	• A combination of grab samples, pit samples, channel samples, and core drilling has been used. Core samples form the primary dataset, with over 3,728 samples collected for TGC and 370 for total sulfur analysis. Grab samples for TGC includes 155 Samples for TGC and TS during reconnaissance field work and 170 for TGC during detailed mapping. TGC also analysed from pits (n=60) and channels (n=8). Around 2 kgs of samples are used for assay of both grab samples and core samples. Sampling follows standard industry protocols to ensure reliable and representative material. Total 90 samples are studied under petrographic investigation which includes grab and cores. Total 15 grab samples were studied for petrographic during reconnaissance field work and 14 during detailed mapping. Two samples are studied from pit wall and 59 core samples are studied for qualitative and semi quantitative studies of graphite flakes. 41 samples are studied under stereo microscope, XRD, FTIR, Raman spectroscopy with representative SEM studies and 8 metallurgical samples are studied to understand the grade and quality of the graphite. • Core samples are collected at consistent intervals with proper marking and logging. Core samples are split and prepared under controlled conditions. Grooved depth markers and careful handling reduce human error. Laboratory equipment is maintained under certified QAQC standards. • Mineralisation is defined by flake graphite content identified visually and confirmed through laboratory TGC analysis. Multiple petrographic, mineralogical, and metallurgical tests were conducted (e.g., SEM, XRD, FTIR, Raman), providing insight into flake size, purity, and host rock characteristics—key inputs for the Public Report and eventual resource modelling. • Sampling for the Tanga project has followed 'industry standard' procedures. Core samples were cut, and ~2 kg of material was used for TGC and sulfur assays. Pulverisation was conducted before submitting ~30g subsamples for IR combustion. All sampling methods were appropriate for graphite and aimed at minimizing bias and maximizing repetitiveness.
Drilling techniques	• Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	• Diamond Core Drilling has been used exclusively. No RC or other drilling methods are employed. Out of total 100 drillholes 81 has been drilled with entirely HQ (core diameter 63.5 mm) and 19 with combined HQ and NQ (47.6 mm diameter) cores with standard/triple-tube setups to maximise recovery. Core orientation survey has been conducted using reflex ACT Coretell in 21 drillholes and all results show no appreciable drift and deviation and orientation results confirm lithology interpretation of foliation data. Both standard and triple-tube techniques were used. Triple-tube setups were primarily employed in weak, weathered zones to enhance core recovery. A total of 100 drillholes have been drilled to a cumulative depth of 9,635 m with most drillholes of <150 m; one exceeded 150 m.

Section 1 Sampling techniques and data (Criteria in this section apply to all succeeding sections)		
Criteria	**JORC Code explanation**	**Commentary**
		• High-quality, intact core are consistently obtained due to the use of appropriate drilling methods, low RPM, and careful recovery handling. However, few drillholes showed significant portions of fragmented weathered material recovery and also core losses even after using triple tube due to weathered clayey loose regolith intervals.
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	• Core recovery has been measured and logged for each drilling run. After retrieval, the recovered core length is measured while the core remains in a half-round tray to prevent errors from handling-related breakage. The core is then placed in core boxes, and grooved depth markers with full run details have been used at the end of each run to ensure clarity and durability. A photograph is taken before the core is transferred to the shed, providing a reference in case of any displacement. At the core shed, depth markings are carefully verified to maintain data integrity. • In highly weathered zones, a triple-tube drilling system has been used to enhance recovery. Sample lengths are adjusted based on actual core recovery to ensure proper representation of the graphitic zone. To obtain maximum recovery, low RPM and reduced water pressure have been consistently used to minimise washout of loose materials. These measures have proven effective in improving core recovery. • No obvious relationships between sample recovery and grade have been identified. After examining the entire mineralised zone along all drillholes, it is evident that the TGC (%) grade is consistent irrespective of core recovery. Thus, the grade of lost material is similar to the grade of the recovered core. The grade of total graphitic carbon (%TGC) is related to the respective lithological domain.
Logging	• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged.	• All core samples are logged by qualified geologists. Logging included lithology, graphite flake size and content measures by visual estimation. Alteration, structure, weathering, and geotechnical parameters such as RQD and fracture frequency are also documented. The detail was sufficient for resource estimation, resource modelling, and metallurgical sampling strategy. • All logging is documented on register and later typed to a digital format. Logging has been both qualitative and quantitative. The core documentation includes information on the length of the drill runs, drilling diameter, core recovery and sampling intervals. Special attention is paid to the zones of graphitised rocks, lithology, alteration and mineralisation, the orientation of quartz veins and veinlets were studied in detail. Qualitative aspects included lithological descriptions and alteration styles. Quantitative aspects included RQD measurements, recovery percentages, and structure orientation data. All full core and representative split core samples were photographed in both dry and wet states for visual records. This photography is performed with specialised set up using a specially designed stand that provides a fixed angle, with optimum light. • 100% of all drilled intervals (solid core and broken fragments) are geologically logged. The total logged lengths are also compared with corresponding drilled length of the drillholes, ensuring full coverage for geological modelling and QA/QC validation.
Sub-sampling techniques and sample preparation	• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	• Diamond core has been cut lengthwise using a core splitter. Half-core samples are consistently taken for assay and the remaining 3/4th portion are retained for reference or duplicate sampling as per requirements. At higher core recovery intervals, the sample length is maintained 2 m. At poorly recovered portions often to longer interval are chosen to maintain the sufficient amount for sample. At places <2m core also sampled especially along domain boundary at

Section 1 Sampling techniques and data (Criteria in this section apply to all succeeding sections)		
Criteria	**JORC Code explanation**	**Commentary**
	• For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	transition where domain mixing has been avoided. All cores for sampling were pre-marked with the cut line. • Wet samples were air-dried before splitting to avoid bias. Fragmented intervals without solid core recovery are also sampled with care after marking better recovered intervals above and below. Both coarse and pulp duplicates are used. • Standard operation procedure (SOP) has been maintained throughout sample preparation including grab, or core samples at various stages of exploration. The quality of sampling is authenticated by regular checking and comparing visual estimation during logging with lab results. All samples were prepared at a certified laboratory (SGS, Mwanza, Tanzania). Preparation involved drying, crushing to <2 mm, splitting, and pulverizing to 85% passing 75 µm. This procedure is industry-standard and appropriate for graphite analysis. Frequent laboratory visits of experts are also arranged. • Blank, certified reference materials (CRMs), coarse and pulp duplicates were inserted at a frequency of 1 in 10. Laboratory duplicates and replicates were used to monitor preparation stages. Results fell within acceptable QAQC limits. • Coarse and pulp duplicates of half-core samples were collected to evaluate repeatability and sample consistency. No significant sample bias or heterogeneity was observed in duplicate analyses. • Sample sizes ranged from 2 to 3 kg for half-core and grab samples. For petrography variable sized pieces were chosen. For SEM, Raman spectroscopy and FTIR powdered sample quantity was limited up to 50 g at maximum. These sizes are appropriate to capture coarse graphite flakes and fine-grained material and ensure statistical reliability with multidisciplinary approach to serve all aspects.
Quality of assay data and laboratory tests	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	• Assays for Total Graphitic Carbon (TGC) were conducted using LECO IR combustion method, which is a total analysis technique appropriate for graphite. XRD (Model: BrukerAXS D8FocusP), Raman spectroscopy (Model: Renishaw InVia Qontor), FTIR (Model: Perkin Elmer Spectrum 65 model spectrophotometer), SEM (Model: FE-SEM Zeiss, model ULTRA55) and Stereo Microscope Petrography (ZEISS SteREO Discovery V2.0 stereo microscope with ZEISS Axiocam208 color system camera attachment) are systematically performed. All methods are industry standard and ISO-accredited. • As soon as a batch of samples is prepared, glass is passed through the crushers. The pulverisers are cleaned with quartz sand. Quality of sample preparation is good. Laboratory instruments were calibrated against certified reference standards. All analytical equipment is regularly serviced and maintained as per lab SOPs. • A robust QAQC protocol was followed: insertion of certified reference materials (CRMs), blanks, coarse and pulp duplicates at 1:10 intervals. Results showed low standard deviation and good alignment with expected values, indicating both precision and accuracy were within acceptable limits. External laboratory checks confirmed consistency and no contamination or sampling error/bias.
Verification of sampling and assaying	• The verification of significant intersections by either independent or alternative company personnel.	• Visual validation of mineralisation against assay results was undertaken for several holes and significant intersections have been reviewed and verified by senior company geologists as well as chartered professionals who were not involved in the original logging

Section 1 Sampling techniques and data (Criteria in this section apply to all succeeding sections)		
Criteria	**JORC Code explanation**	**Commentary**
	• The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data.	or sampling. These verifications include cross-checking with geological logs, assay results, and core photographs including lab analysis after visit to all labs. • No twinned holes have been drilled to date in this phase of the exploration programme. However, few drillholes got stuck after significant meterage of progress and there adjacent to such incomplete drillhole location new drilling conducted and the overlapping portions are matched, which showed persistence of graphite zones. • All primary data was initially recorded on hard-copy field logs and later digitised into a central database. Data validation checks were applied during entry. Electronic data is stored on secure, regularly backed-up company servers in Seequent MX cloud data repository. Hard copies are archived in the project office. • No grade or analytical results were adjusted. Only detection limit qualifiers (e.g., cut-off grade limit fixing "<") were normalised to numerical thresholds during database import, following industry-standard protocols.
Location of data points	• Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control.	• A detailed drone LiDAR and DGPS RTK survey has been conducted across ~10.3 km^2, covering entire area. Drillhole collars are surveyed using an RTK GNSS rover with Fix solutions in open areas (horizontal accuracy up to 6 mm). In dense forested regions, Float solutions were obtained with typical horizontal and vertical accuracies of ~30 to 40 cm. Drone data was also used to validate and complement ground-based drillhole positions. • All data were collected in the WGS84 UTM Zone 37S coordinate system and later converted to Arc1960 for local regulatory and mapping requirements. • Topographic control was acceptable due to the integration of RTK-calibrated benchmarks (TGB-01 to TGB-04), Ground Control Points (GCPs), and drone LiDAR data. DEMs with 0.5 m contour intervals and orthoimages (2.1–3 cm resolution) were produced. Cross-validation of LiDAR and DGPS results showed elevation differences of only ~1 cm in open areas, indicating high accuracy.
Data spacing and distribution	• Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied.	• The graphitic schist body is more or less homogeneously spread along the area and spacing of the drillholes are decided as 400m by 300m. The distances between the transverse sections is 400 m to 350 m, and the depths of the drillholes varies between 60 m and 150 m. • Broader spacing (400 m by 300 m) in general supports preliminary interpretation of mineralised zones. The grid is sufficient to trace mineralisation zones. Infill drilling as per the advice from chartered professionals has demonstrated geological and grade continuity appropriate for classification of Inferred and Indicated resources. The data spacing aligns with industry norms for flake graphite projects and supports reliable interpolation. • No compositing was applied prior to laboratory submission. Assays were based on original sampled intervals. However, length-weighted compositing has been used during resource estimation for modelling purposes, with all procedures documented.
Orientation of data in relation to geological structure	• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	• Drilling has been designed to intersect the graphite-bearing foliation at high angles, typically with drillholes oriented perpendicular to the interpreted strike. Foliation dips ~30° in general. Vertical drillholes are mostly drilled to take care of localised variation in dips laterally and vertically. These orientations help achieve unbiased sampling of the mineralised zones.

Section 1 Sampling techniques and data (Criteria in this section apply to all succeeding sections)		
Criteria	**JORC Code explanation**	**Commentary**
	• If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	• No significant sampling bias has been identified. Drill hole orientations were adjusted during the programme as structural understanding improved. Any potential bias is considered immaterial at this stage and does not impact the validity of results.
Sample security	• The measures taken to ensure sample security.	• Samples were stored in sealed, clearly labelled bags and transported from the field to the secure core shed by company personnel. Control over the security of samples is carried out throughout the entire process. Each sample is assigned a unique number. Chain-of-custody protocols were followed, including logging of sample transfers. Samples were then dispatched to the laboratory, with tamper-evident packaging. Access to samples was restricted to authorised staff only. No evidence of sample tampering is observed by the CP.
Audits or reviews	• The results of any audits or reviews of sampling techniques and data.	• Internal reviews of sampling techniques and data management have been conducted by senior geological personnel to ensure compliance with industry best practices. Additionally, external consultants carried out an independent audit, confirming that all procedures adhered to JORC Code reporting requirements. Visual validation of the drillhole and mineralised intersections was undertaken against hard copy drill sections and provided core photographs. Minor recommendations regarding improved logging consistency are addressed immediately. No material concerns have been identified by the CP.

Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section)		
Criteria	**JORC Code explanation**	**Commentary**
Mineral tenement and land tenure status	• Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. • The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	• The Prospecting licence PL 11371/2019 was granted to Grapeak Miners Tz Ltd. on 22/08/2019 with a validity of 4 years. This licence was further renewed for 3 years up to 21/08/2026. The licence covers an area of 11.27 km^2. • The Prospecting licence PL 11772/2021 was granted to Grapeak Miners Tz Ltd on 08/12/2021 with a validity of 4 years. This licence was further renewed for 3 years up to 07/12/2028. The licence covers an area of 0.54 km^2. • The Prospecting licence PL 12066/2022 was granted to Sakariya Gold Tz Ltd on 25/10/2022 with a validity of 4 years. This licence is valid upto 24/10/2026. The licence covers an area of 10.37 km^2. • The total cumulative area of the three licences is 22.18 km^2. • There are some small pocket areas which is being mined locally for gemstones and a reserve forest area is present in the south part of the PL 12066/2022 covering an area of 6.8 km^2. We have carried out exploration activities

Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section)		
Criteria	**JORC Code explanation**	**Commentary**
		within the forest area after maintaining all statutory compliances and obtaining necessary approvals from respective government authorities.
Exploration done by other parties	• Acknowledgment and appraisal of exploration by other parties.	• Before 2022 there was no known exploration activities carried out in this area. • From 2022 exploration was carried out through geological mapping and pitting by Grapeak Miners Tz Ltd and Sakariya Gold Tz Ltd (100% owned subsidiary of Sakariya Mines and Minerals Pvt Ltd), From 2024 to 2025 drilling was carried out by Grapeak Miners Tz Ltd which was followed by Topographical Survey.
Geology	• Deposit type, geological setting and style of mineralisation.	• The Tanga graphite deposit exhibits typical characteristic feature of orogenic belt, especially Proterozoic mobile belt related graphite genesis. • The licence areas are underlain by the Neoproterozoic Mozambique mobile belt defined by medium to high grade metamorphism (amphibolite to granulite facies) of both sedimentary and igneous protoliths. In general, the graphitic schists, minor quartz-feldspathic and carbonate rock intervals are associated alongside garnet biotite gneisses and mafic to felsic granulites. Overall, the deposit is characterised by foliation trending dominantly N-S and dipping ~30^0 east with localised variations in both amount and directions due to several episodes of deformation imprints. • Overall, the graphitic intervals are persistent laterally and down-dip. The layers are of varying dimensions and total graphitic carbon (TGC%) content but appear to be persistent without much variation. Graphite occurs as flakes within schistose and gneissic host rock associated with quartz, feldspar and biotite. Petrographic studies of bed rock samples show that the dominant in situ flake size may be classified as large (180 to 300 µm) and jumbo (>300µm).
Drillhole Information	• A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes: — easting and northing of the drillhole collar. — elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar. — dip and azimuth of the hole. — down hole length and interception depth. — hole length. • If the exclusion of this information is justified on the basis that the information is not Material and	• Exploration results are not being reported.

Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section)		
Criteria	**JORC Code explanation**	**Commentary**
	this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	
Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated.	• Exploration results are not being reported.
Relationship between mineralisation widths and intercept lengths	• These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	• Exploration results are not being reported.
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.	• Relevant maps and diagrams are included in the body of the report.
Balanced reporting	• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	• Exploration results are not being reported.
Other substantive exploration data	• Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	• In 2022 and 2023 geological mapping was carried out, bed rock samples were collected and analysed, Petrographic studies were also carried out. In 2023 pits and channel sampling were carried out followed by their analysis. From 2024 drilling, bulk density measurement, petrographic studies, metallurgical studies were carried out along with analysis of drill core samples.
Further work	• The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	• Metallurgical tests have been carried out on 8 composite drillhole samples. Planning for further metallurgical test works are underway.

Section 3 Estimation and Reporting of Mineral Resources (Criteria listed in section 1 and where relevant in Section 2, also apply to this section)		
Criteria	**JORC Code explanation**	**Commentary**
Database integrity	• Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. • Data validation procedures used.	• Data used in the Mineral Resource estimate (MRE) is sourced from a database dump, provided in the form of Microsoft Excel files. Relevant tables from the files are imported into Micromine 2025 software for use in the MRE. These were validated in Micromine for inconsistencies, overlapping intervals, out of range values, and other important items. • All data was visually checked by the CP.
Site visits	• Comment on any site visits undertaken by the Competent Person and the outcome of those visits. • If no site visits have been undertaken indicate why this is the case.	• Serikjan Urbisinov and Andrew Scogings visited the project in August 2024. • The purpose of the visit was to review the geology, drilling operations, core handling, sampling procedures, and QAQC practices, and to assess the overall suitability of the exploration data for Mineral Resource estimation.
Geological interpretation	• Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. • Nature of the data used and of any assumptions made. • The effect, if any, of alternative interpretations on Mineral Resource estimation. • The use of geology in guiding and controlling Mineral Resource estimation. • The factors affecting continuity both of grade and geology.	• There is a reasonable level of confidence in the geological interpretation of mineralisation zones. Drillholes and surface mapping have been used to assist the interpretation. Additional work is required to better define exact geometry and the extents of the interpreted mineralised zones in the areas of sparse drilling. • Surface mapping of mineralised outcrop, drillhole/pit intercept logging and assay results have formed basis for the geological interpretation. • The precise limits and geometry cannot be absolutely defined due to the limitations of the current drill coverage. Further work is required to better define the geometry and limits of the mineralised zones, but no significant downside changes to the interpreted mineralised volume are anticipated. • The grade and to a lesser degree lithological interpretation forms the basis for the modelling.
Dimensions	• The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.	• The currently interpreted mineralisation of the Tanga area extends for approximately 4.1 km along a 0° strike and up to 750 m wide (multiple lenses). The zone extends from surface to 225 m depth below the surface.
Estimation and modelling techniques	• The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used. • The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.	• Grade estimation was by ordinary kriging (OK) using Micromine 2025 software. The interpretation was extended perpendicular to the corresponding first and last interpreted cross section to the distance equal to a half distance between the adjacent exploration lines. If a mineralised envelope did not extend to the adjacent drillhole section, it was projected halfway to the next section and terminated. The general direction and dip of the envelopes was maintained. • No assumptions were made regarding the recovery of by-products.

Section 3 Estimation and Reporting of Mineral Resources (Criteria listed in section 1 and where relevant in Section 2, also apply to this section)		
Criteria	**JORC Code explanation**	**Commentary**
	• The assumptions made regarding recovery of by-products. • Estimation of deleterious elements or other non-grade variables of economic significance (eg sulfur for acid mine drainage characterisation). • In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed. • Any assumptions behind modelling of selective mining units. • Any assumptions about correlation between variables. • Description of how the geological interpretation was used to control the resource estimates. • Discussion of basis for using or not using grade cutting or capping. • The process of validation, the checking process used, the comparison of model data to drillhole data, and use of reconciliation data if available.	• No deleterious or non-grade variables were estimated. • The block model was constructed using a 25 mE by 25 mN by 10 mRL parent block size, with sub-celling to 5 mE by 5 mN by 2 mRL for domain volume resolution. The parent cell size was chosen based on the general morphology of mineralised bodies and to avoid the generation of too large block models. The sub-celling size was chosen to maintain the resolution of the mineralised bodies. The sub-cells were optimised in the models where possible to form larger cells. • Interpolation was conducted for the blocks that fell into the boundaries of the mineralisation. Interpolation was completed separately for each mineralised envelope. • To accommodate for the morphology of the mineralisation zone a dynamic search ellipsoid was used for the grade interpolation. • No selective mining units were assumed in this estimate. • No strong correlations were found between the grade variables. • The OK estimate used the parameters obtained from the modelled variograms. The results of the check estimates correlate well. • Validation of the block model consisted of comparison of the block model volume to the wireframe volume. Grade estimates were validated by statistical comparison with the drill data, visual comparison of grade trends in the model with assay data trends. Additionally, swath plots were generated to verify block model grades vs drillhole/trench grades along easting, northing and elevation slices.
Moisture	• Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.	• The tonnages are estimated on a dry basis.
Cut-off parameters	• The basis of the adopted cut-off grade(s) or quality parameters applied.	• Statistical analysis showed natural breaks in the graphite grade population distribution at approximately 3% TGC which formed the basis for the decision regarding determination of mineralisation envelope threshold grade. • The Mineral Resource was then reported at 3% TGC cut-off.
Mining factors or assumptions	• Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this	• At this stage of resource development, it is assumed that mining would be by open pit methods.

Section 3 Estimation and Reporting of Mineral Resources (Criteria listed in section 1 and where relevant in Section 2, also apply to this section)		
Criteria	**JORC Code explanation**	**Commentary**
	should be reported with an explanation of the basis of the mining assumptions made.	
Metallurgical factors or assumptions	• The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.	• Preliminary metallurgical understanding is based on petrographic and mineralogical studies completed on 76 thin and polished sections from 16 drillholes. The mineralised material is predominantly graphitic quartz–mica–feldspar schist, with pelitic minerals such as sillimanite, kyanite, and staurolite, and accessory minerals including calcite, clays, pyrite, and garnet. Weathering effects, including oxidation of sulfide minerals and kaolinisation of feldspars, were observed in shallow zones and in some cases caused splitting of graphite flakes. • Metallurgical samples were collected across fresh, transitional, oxidised, and kaolinised domains. Kaolinised intervals locally displayed elevated sulfur contents (6 to 8%). • All composites achieved a final concentrate grade of >97% TC. • Oxide composite flake contents were relatively coarse with >57% +150 µm. • Three of the fresh composites also had high coarse flake contents with TDM003, TDM004 and TDM005 having >61% of +150 µm flake. • TDM001 and TDM0002 (fresh) both had lower respective coarse flake (+150 µm) contents of 34.8% and 42.5% respectively which reflects thin section observations. • TDM008 (kaolinised) had the highest content of coarse flake (+150 µm) at 73%. • No processing recoveries or concentrate assumptions have been applied to the Mineral Resource. • AMC cautions that laboratory-scale test methods can significantly influence graphite concentrate quality and may not represent future plant-scale performance. Further metallurgical testwork is required to evaluate flake recovery, concentrate purity, and product specifications. •
Environmental factors or assumptions	• Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.	• No detailed assumption regarding possible waste and process residue disposal options have been made at this stage.

Section 3 Estimation and Reporting of Mineral Resources (Criteria listed in section 1 and where relevant in Section 2, also apply to this section)		
Criteria	**JORC Code explanation**	**Commentary**
Bulk density	• Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples. • The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit. • Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.	• Bulk density was determined using several methods depending on core condition, including wax-coated Archimedes measurements, calliper-based geometric measurements, direct water-immersion density scale measurements, and whole core tray methods. A total of 1,480+ bulk density determinations were collected across fresh, transition, and oxide material. Early drilling relied mainly on wax-coated core measurements, with Archimedes, calliper, and tray methods increasingly applied as drilling progressed. • Bulk density values were analysed by weathering domain, and separate histograms were created for oxide, transition, and fresh rock. The distributions showed well-defined populations with limited scatter. Mean values of 1.95 t/m^3 (oxide), 2.33 t/m^3 (transition), and 2.72 t/m^3 (fresh) were identified and subsequently assigned to the respective domains for the Mineral Resource estimate. Bulk density variation is primarily controlled by weathering state, with oxidation and kaolinisation reducing bulk density relative to fresh schist. • These domain-based average bulk densities were applied to all corresponding block model cells and are considered by CP as appropriate given the stage of the project and the nature of the dataset.
Classification	• The basis for the classification of the Mineral Resources into varying confidence categories. • Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data). • Whether the result appropriately reflects the Competent Person's view of the deposit.	• The Mineral Resource was classified as Indicated and Inferred Mineral Resource, accounting for the level of geological understanding of the deposit, quality of samples, density data, drillhole spacing and sampling, analytical and metallurgical processes. Material classified as Indicated was considered sufficiently informed by adequately detailed and reliable geological and sampling data to assume geological, grade and quality continuity between data points. Material classified as Inferred was considered sufficiently informed by geological and sampling data to imply geological, grade and quality continuity between data points. • In general, Mineral Resource was classed as Indicated Mineral Resource for model cells that were within variogram long ranges and in the areas of the drilling where the drillhole density was reduced to line spacing approximately 250 m and hole spacing to 150 m. • The Mineral Resource was classified as Inferred where model cells were located beyond one variogram long range. Smaller mineralised zones supported by a limited number of drillholes were also classified as Inferred.
Audits or reviews	• The results of any audits or reviews of Mineral Resource estimates.	• Internal audits were completed by AMC which verified the technical inputs, methodology, parameters, and results of the estimate.

Section 3 Estimation and Reporting of Mineral Resources (Criteria listed in section 1 and where relevant in Section 2, also apply to this section)		
Criteria	**JORC Code explanation**	**Commentary**
Discussion of relative accuracy/ confidence	• Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate. • The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used. • These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.	• The MRE has been classified and reported in accordance with the JORC Code using a qualitative approach. All factors that been considered have been adequately communicated in Section 1 and Section 3 of this table. • The statement refers to global estimation of tonnes and grade.

Appendix B
Prospecting licences

PL 11371/2019

Area: 11.27 sq.km

Grant Date: 22.08.2019

Expiry Date: 21.08.2026

Commodity: Graphite - Industrial Mineral

Ownership: Grapeak Miners (TZ) Ltd (100%)

Current status: This PL is currently under 1st renewal period of 3 years. It could be renewed for further a period of 2 years, after the end of 1st renewal period.

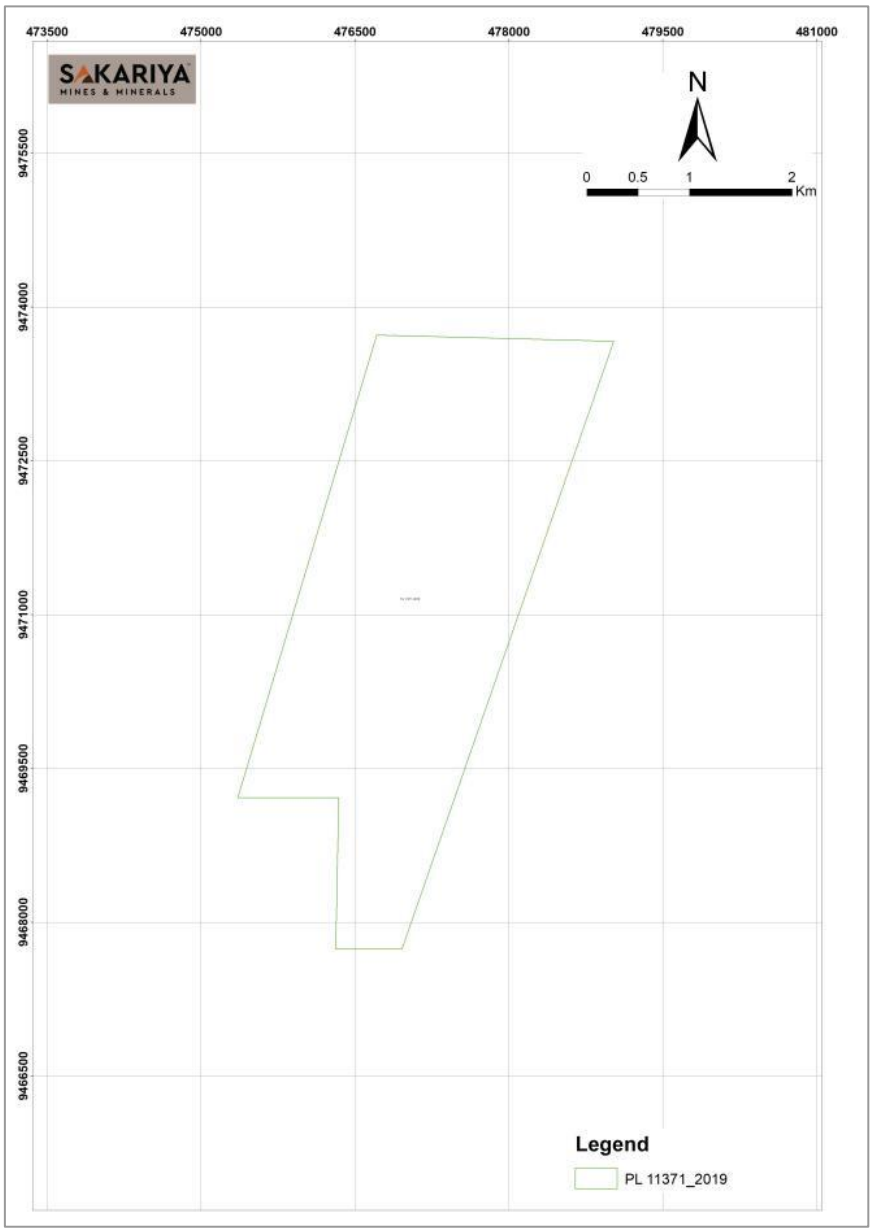


Table B.1 PL11371/2019 corner coordinates (Arc1960)

Order	NS	LAT_DEG	LAT_MIN	LAT_SEC	EW	LON_DEG	LON_MIN	LON_SEC
1	S	4	48	9	E	38	46	40
2	S	4	48	9	E	38	47	12
3	S	4	48	57	E	38	47	11
4	S	4	48	57	E	38	47	32
5	S	4	45	44	E	38	48	39
6	S	4	45	42	E	38	47	24

PL11772/2021

Area: 0.54 sq.km

Grant Date: 08.12.2021


Expiry Date: 07.12.2025

Renewal Applied on: 21.08.2025

Commodity: Graphite - Industrial Mineral

Ownership: Grapeak Miners (TZ) Ltd (100%)

Current status: This PL is deemed to 1st renewal for a period of 3 years. It could be renewed for further a period of 2 years, after the end of 1st renewal period.

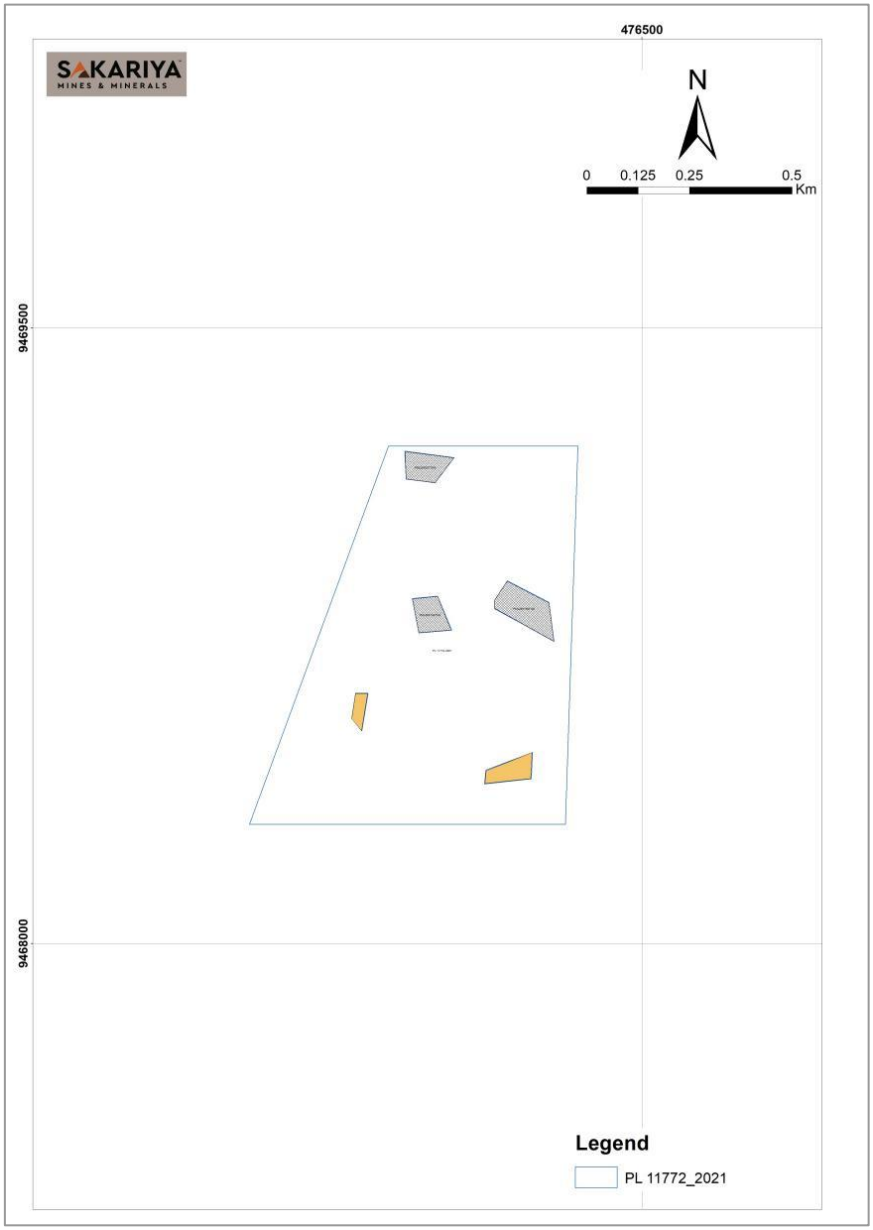

Within this PL11772/2021, there are 5 PMLs. Out of which, application of 3 PMLs (cross hatched) were recommended in favour of Mr. Maiga (Grapeak Miners Tz Ltd).

Table B.2 PL11772/2021 corner coordinates (Arc1960)

Order	NS	LAT_DEG	LAT_MIN	LAT_SEC	EW	LON_DEG	LON_MIN	LON_SEC
1	S	4	48	09.00"	E	38	47	12.00"
2	S	4	48	39.00"	E	38	47	11.00"
3	S	4	48	39.00"	E	38	47	46.00"
4	S	4	48	09.00"	E	38	47	57.00"
5	S	4	48	11.60"	E	38	47	58.40"
6	S	4	48	11.90"	E	38	47	00.70"
7	S	4	48	09.90"	E	38	47	02.20"
8	S	4	48	09.40"	E	38	47	58.30"
9	S	4	48	19.70"	E	38	47	06.40"
10	S	4	48	21.19"	E	38	47	05.43"
11	S	4	48	21.86"	E	38	47	05.39"
12	S	4	48	24.50"	E	38	47	10.10"
13	S	4	48	21.40"	E	38	47	09.70"
14	S	4	48	23.60"	E	38	47	02.00"
15	S	4	48	20.90"	E	38	47	00.90"
16	S	4	48	21.10"	E	38	47	58.90"
17	S	4	48	23.80"	E	38	47	59.40"
18	S	4	48	30.60"	E	38	47	54.10"
19	S	4	48	31.60"	E	38	47	54.90"
20	S	4	48	28.60"	E	38	47	55.40"
21	S	4	48	28.60"	E	38	47	54.40"
22	S	4	48	34.70"	E	38	47	04.70"
23	S	4	48	35.80"	E	38	47	04.60"
24	S	4	48	35.40"	E	38	47	08.30"
25	S	4	48	33.30"	E	38	47	08.40"

PL12066/2022

Area: 10.37 sq.km


Grant Date: 25.10.2022

Expiry Date: 24.10.2026

Commodity: Graphite - Industrial Mineral

Ownership: Sakariya Gold (TZ) Ltd (100%)

Current status: This PL is deemed to 1st renewal for a period of 3 years after the initial validity of 4 years.

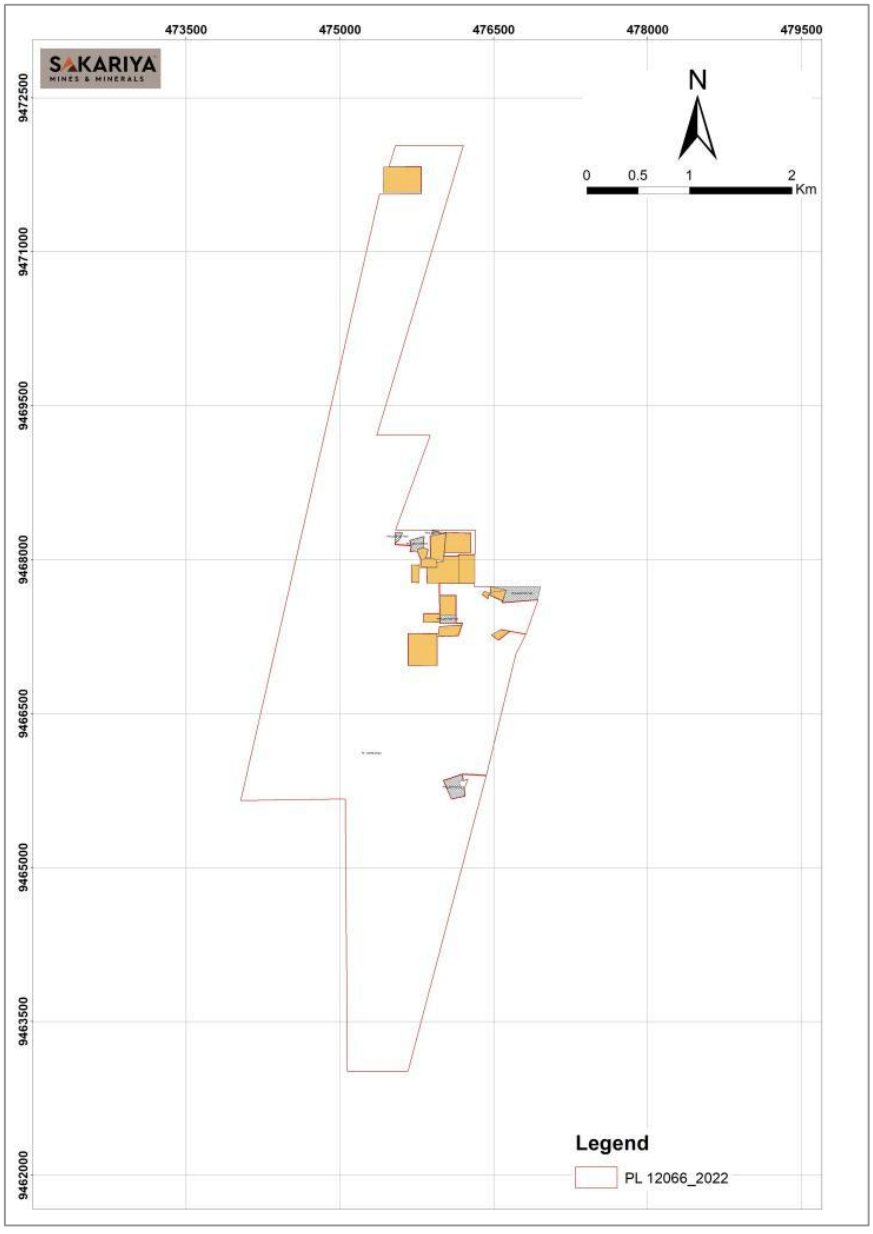

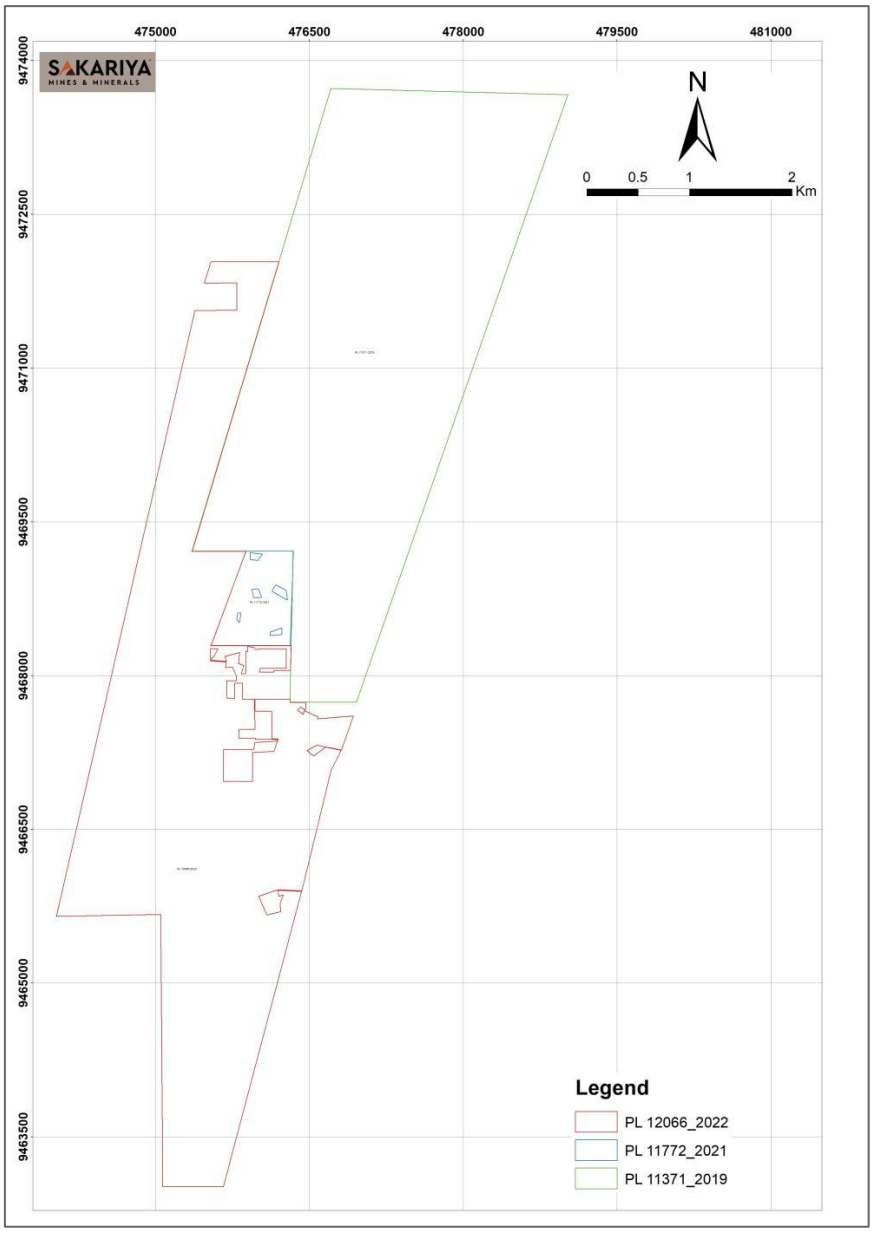
Within this PL12066/2022, there are 23 PMLs. Out of which, application of 6 PMLs (cross hatched) were recommended in favour of Mr. Maiga (Grapeak Miners Tz Ltd).

Table B.3 PL12066/2022 corner coordinates (Arc1960)

Corner	Latitude	Longitude
1	-04°46'37.04"	38°47'7.46"
2	-04°48'9.03"	38°46'39.96"
3	-04°48'9.04"	38°46'56.95"
4	-04°48'39.04"	38°46'45.92"
5	-04°48'39.09"	38°47'11.26"
6	-04°48'46.90"	38°47'11.09"
7	-04°48'46.90"	38°47'5.86"
8	-04°48'47.38"	38°47'5.86"
9	-04°48'47.38"	38°47'1.30"
10	-04°48'46.23"	38°47'1.41"
11	-04°48'46.21"	38°47'9.81"
12	-04°48'40.05"	38°47'9.81"
13	-04°48'39.89"	38°47'2.01"
14	-04°48'40.30"	38°47'0.02"
15	-04°48'39.53"	38°46'59.66"
16	-04°48'39.20"	38°46'57.57"
17	-04°48'40.79"	38°46'57.58"
18	-04°48'40.99"	38°46'56.85"
19	-04°48'47.93"	38°46'56.96"
20	-04°48'47.93"	38°46'55.55"
21	-04°48'45.24"	38°46'56.27"
22	-04°48'44.64"	38°46'54.64"
23	-04°48'41.10"	38°46'54.99"
24	-04°48'42.41"	38°46'50.34"
25	-04°48'43.95"	38°46'50.86"
26	-04°48'43.61"	38°46'45.95"
27	-04°48'43.17"	38°46'45.96"
28	-04°48'42.09"	38°46'47.07"
29	-04°48'39.97"	38°46'48.15"
30	-04°48'39.92"	38°46'45.77"
31	-04°48'43.78"	38°46'45.79"
32	-04°48'44.11"	38°46'50.83"
33	-04°48'45.96"	38°46'50.50"
34	-04°48'45.74"	38°46'52.78"
35	-04°48'48.61"	38°46'53.93"
36	-04°48'50.19"	38°46'53.89"
37	-04°48'50.19"	38°46'50.91"
38	-04°48'55.60"	38°46'50.95"
39	-04°48'55.81"	38°46'53.41"
40	-04°48'50.96"	38°46'53.41"
41	-04°48'50.96"	38°46'55.94"
42	-04°48'56.03"	38°46'55.94"
43	-04°48'56.03"	38°46'55.95"

Corner	Latitude	Longitude
44	-04°48'56.04"	38°46'59.66"
45	-04°49'5.60"	38°46'59.90"
46	-04°49'5.60"	38°46'54.82"
47	-04°49'8.43"	38°46'54.76"
48	-04°49'8.43"	38°46'59.94"
49	-04°49'8.77"	38°46'59.94"
50	-04°49'8.77"	38°47'6.97"
51	-04°49'9.29"	38°47'6.78"
52	-04°49'9.71"	38°46'59.78"
53	-04°49'11.96"	38°46'59.46"
54	-04°49'11.97"	38°46'49.96"
55	-04°49'22.10"	38°46'49.92"
56	-04°49'22.10"	38°46'59.09"
57	-04°49'12.90"	38°46'59.09"
58	-04°49'12.62"	38°47'5.81"
59	-04°49'8.59"	38°47'7.19"
60	-04°49'8.52"	38°47'5.18"
61	-04°48'59.82"	38°47'5.14"
62	-04°48'59.82"	38°46'59.93"
63	-04°48'56.05"	38°46'59.90"
64	-04°48'56.04"	38°47'10.94"
65	-04°48'57.06"	38°47'10.94"
66	-04°48'57.04"	38°47'15.93"
67	-04°48'58.92"	38°47'15.91"
68	-04°48'59.38"	38°47'15.84"
69	-04°48'58.53"	38°47'14.20"
70	-04°48'59.51"	38°47'13.33"
71	-04°49'0.88"	38°47'15.22"
72	-04°48'59.60"	38°47'15.36"
73	-04°49'1.67"	38°47'19.86"
74	-04°49'2.22"	38°47'19.59"
75	-04°49'1.30"	38°47'31.01"
76	-04°49'12.16"	38°47'27.22"
77	-04°49'10.64"	38°47'19.41"
78	-04°49'12.36"	38°47'16.32"
79	-04°49'14.07"	38°47'18.43"
80	-04°49'11.24"	38°47'22.14"
81	-04°49'12.20"	38°47'27.14"
82	-04°49'18.55"	38°47'23.94"
83	-04°49'18.55"	38°47'23.95"
84	-04°49'56.87"	38°47'14.67"
85	-04°49'56.51"	38°47'7.06"
86	-04°49'58.59"	38°47'1.03"
87	-04°50'4.53"	38°47'3.59"

Corner	Latitude	Longitude
88	-04°50'3.55"	38°47'7.94"
89	-04°50'0.82"	38°47'7.76"
90	-04°49'58.14"	38°47'8.79"
91	-04°49'58.62"	38°47'7.36"
92	-04°49'56.70"	38°47'7.13"
93	-04°49'57.08"	38°47'14.60"
94	-04°51'30.91"	38°46'49.79"
95	-04°51'30.91"	38°46'30.63"
96	-04°50'4.38"	38°46'29.98"
97	-04°50'4.96"	38°45'56.96"
98	-04°46'52.51"	38°46'40.84"
99	-04°46'52.37"	38°46'54.18"
100	-04°46'43.67"	38°46'54.22"
101	-04°46'43.79"	38°46'43.91"
102	-04°46'37.04"	38°46'45.93"
103	-04°46'37.04"	38°47'7.46"


475000
476500
478000
479500
481000
9474000
9472500
9471000
9469500
9468000
9466500
9465000
9463500
SAKARIYA
MINES & MINERALS
N
0 0.5 1 2
Km
Legend
PL 12066_2022
PL 11772_2021
PL 11371_2019

Our offices

Australia

Adelaide

Level 2, 12 Pirie Street
Adelaide SA 5000 Australia

T +61 8 8201 1800
E adelaide@amcconsultants.com

Brisbane

Level 15, 100 Creek Street
Brisbane Qld 4000 Australia

T +61 7 3230 9000
E brisbane@amcconsultants.com

Melbourne

Level 12, 477 Collins Street
Melbourne Vic 3000 Australia

T +61 3 8601 3300
E melbourne@amcconsultants.com

Perth

Level 3, 1100 Hay Street
West Perth WA 6005 Australia

T +61 8 6330 1100
E perth@amcconsultants.com

Canada

Toronto

140 Yonge Street, Suite 200
Toronto ON M5C 1X6 Canada

T +1 647 953 9730
E toronto@amcconsultants.com

Vancouver

200 Granville Street, Suite 202
Vancouver BC V6C 1S4 Canada

T +1 604 669 0044
E vancouver@amcconsultants.com

South Africa

Cape Town

First Floor, Willowbridge Centre
Carl Cronje Drive
Cape Town 7530 South Africa

T +27 720 833 231
E capetown@amcconsultants.com

Centurion

Ground Floor (G05), Building 14, Block B
Byls Bridge Office Park
Corner of Olievenhoutbosch and Jean Ave
Centurion 0157 South Africa

T +27 720 833 231
E capetown@amcconsultants.com

United Kingdom

Reading

Registered in England and Wales
Company No. 3688365

Office 336a, Davidson House
Forbury Square
Reading, Berkshire RG1 3EU United Kingdom

T +44 1628 778 256
E unitedkingdom@amcconsultants.com

Registered Office:
Kinetic Centre
Theobald Street
Elstree
Hertfordshire WD6 4PG United Kingdom